



MARYLAND DEPARTMENT OF THE ENVIRONMENT
1800 Washington Boulevard • Baltimore MD 21230
410-537-3000 • 1-800-633-6101

Robert L. Ehrlich, Jr.
Governor

Kendal P. Philbrick
Acting Secretary

Michael S. Steele
Lt. Governor

Modification to the Rate of Progress Plan for the Baltimore Region: Revising Mobile Emission Estimates with Mobile6

SIP Revision 03-06

(Proposed)

October 27, 2003

Prepared for:

U.S. Environmental Protection Agency

Prepared by:

Maryland Department of the Environment



This Page Left Intentionally Blank

TABLE OF CONTENTS

1.0 EXECUTIVE SUMMARY	1
2.0 INTRODUCTION AND BACKGROUND	3
2.1 CLEAN AIR ACT REQUIREMENTS	3
2.2 THE STATE IMPLEMENTATION PLAN (SIP) PROCESS	5
2.3 THE PHASE II RATE OF PROGRESS PLAN.....	7
3.0 1990 BASE YEAR INVENTORY	8
3.1 BACKGROUND AND REQUIREMENTS	8
3.2 SOURCE SECTORS	8
3.2.1 POINT SOURCES.....	10
3.2.2 AREA SOURCES	13
3.2.3 ONROAD MOBILE SOURCES	14
3.2.4 NONROAD MOBILE SOURCES.....	15
3.2.5 BIOGENIC EMISSIONS.....	17
4.0 THE PROJECTED EMISSIONS INVENTORIES.....	20
4.1 GROWTH FACTOR METHODOLOGY – BEA EARNINGS METHODOLOGY	20
4.1.1 DESCRIPTION OF DATA SOURCE.....	20
4.1.2 GROWTH PROJECTION METHODOLOGY.....	21
4.1.3 OFFSET PROVISIONS.....	21
4.2 GROWTH FACTOR METHODOLOGY - EGAS GROWTH FACTORS.....	22
4.2.1 NO _x POINT SOURCE GROWTH.....	25
4.2.2 NONROAD GROWTH.....	26
4.3 GROWTH FACTOR METHODOLOGY – MOBILE SOURCE GROWTH	27
4.4 ASSUMPTIONS MADE IN CALCULATING GROWTH.....	27
4.4.1 USE OF BEA METHODOLOGY VS. USE OF EGAS METHODOLOGY.....	27
4.4.2 ACTUAL VS. ALLOWABLE EMISSIONS IN THE CONSTRUCTION OF THE PROJECTED EMISSIONS INVENTORY.....	28
4.4.3 EFFECT OF RULE EFFECTIVENESS.....	29
4.5 PROJECTION INVENTORY RESULTS	29
5.0 CALCULATING THE VOC EMISSION TARGET LEVELS FOR THE POST-1996 MILESTONE YEARS	31
5.1 NO _x SUBSTITUTION	31
5.2 CALCULATION OF THE VOC EMISSION TARGET LEVELS FOR THE POST-1996 TARGET LEVELS	32
5.3 TARGET LEVEL FLOWCHARTS	34
6.0 CONTROL MEASURES TO MEET THE RATE OF PROGRESS REQUIREMENTS.....	41
6.1 ON-ROAD MOBILE MEASURES	42
6.1.1 Enhanced Vehicle Inspection and Maintenance (Enhanced I/M)	42
6.1.2 Tier 1 Vehicle Emission Standards and New Federal Evaporative Test Procedures	44
6.1.3 Reformulated Gasoline in On-road Vehicles	45
6.1.4 Tier 2 Program,	46
6.1.5 National Low Emission Vehicle Program.....	47
6.1.6 Federal Heavy-Duty Diesel Engine Rule.....	48
6.1.7 Conformity Regulation.....	49
6.1.8 Stage II and New Vehicle On-Board Vapor Recovery Systems.....	51

6.2	AREA SOURCE MEASURES	53
6.2.1	<i>Municipal Landfills.....</i>	53
6.2.2	<i>Burning Ban.....</i>	57
6.2.3	<i>Surface Cleaning/Degreasing.....</i>	59
6.2.4	<i>Architectural and Industrial Maintenance Coatings.....</i>	60
6.2.5	<i>Commercial and Consumer Products.....</i>	62
6.2.6	<i>Automobile Refinishing.....</i>	64
6.2.7	<i>Screen Printing.....</i>	65
6.2.8	<i>Graphic Arts – Lithographic Printing.....</i>	68
6.2.9	<i>Graphic Arts – Flexographic and Rotogravure Printing.....</i>	71
6.2.10	<i>OTC – Consumer Products.....</i>	74
6.3	NON-ROAD MEASURES.....	75
6.3.1	<i>Nonroad Small Gasoline Engines.....</i>	75
6.3.2	<i>Non-Road Diesel Engines Tier I and Tier II.....</i>	80
6.3.3	<i>Marine Engine Standards.....</i>	83
6.3.4	<i>Emissions standards for large spark ignition engines.....</i>	85
6.3.5	<i>Reformulated gasoline use in non-road motor vehicles and equipment.....</i>	91
6.3.6	<i>Railroad Engine Standards.....</i>	97
6.4	POINT SOURCE MEASURES	98
6.4.1	<i>Expandable Polystyrene Products.....</i>	98
6.4.2	<i>Yeast Manufacturing.....</i>	100
6.4.3	<i>Commercial Bakery Ovens.....</i>	102
6.4.4	<i>Federal Air Toxics.....</i>	104
6.4.5	<i>Enhanced Rule Compliance.....</i>	105
6.4.6	<i>State Air Toxics.....</i>	111
6.4.7	<i>NOx RACT -- Reasonably Available Control Technology.....</i>	113
6.4.8	<i>NOx Phase II / Phase III Ozone Transport Commission (OTC)/NOx Budget Rule (Phase II) and NOx SIP Call (Phase III).....</i>	118
7.0	CONTINGENCY MEASURES.....	121
7.1	SURPLUS REDUCTIONS FROM EXISTING MEASURES.....	121

LIST OF TABLES

Table 1.1:	Summary of Emission Benefits for the Baltimore Nonattainment Area (Tons per Day).....	2
Table 2.1:	Maryland 1-Hour Ozone Classifications	5
Table 3.1:	1990 Base Year Ozone Precursor Emissions Inventory Emissions Summary By Source Type	9
Table 3.2:	1990 Base Year Ozone Precursor Emissions Inventory Point Source Emissions Totals By Category In The Baltimore Nonattainment Area.....	11
Table 3.3:	Nonroad Source Emissions In Baltimore	16
Table 3.4:	Emissions from Biogenic Sources by County	18
Table 4.1:	EGAS Surrogate Indicators for Projecting Growth in Nonroad Sources	26
Table 4.2:	Projection Year Emission Inventory Results for the Baltimore Nonattainment Area.....	29
Table 5.1:	Baltimore Area Emission Target Levels for Post-1996 Milestone Years	31
Table 6.1:	Summary of Emission Benefits For The Baltimore Area (Tons Per Day)	41
Table 7.1:	Contingency Measure Calculation.....	121

LIST OF FIGURES

Figure 3.1:	1990 Base Year Emissions Inventory (Tons/Day) Baltimore Nonattainment Area.....	9
Figure 3.2:	1990 Base Year Ozone Precursor Emission Inventory Baltimore Nonattainment Area VOC Point Source Emission Distribution By Category	12
Figure 3.3:	1990 Base Year Ozone Precursor Emission Inventory Baltimore Nonattainment Area NOx Point Source Emission Distribution By Category	12
Figure 3.4:	1990 Base Year Ozone Precursor Emission Inventory Baltimore Nonattainment Area - Area Source Emission Distribution By Category (Tons per Day)	13
Figure 3.5:	1990 Base Year Ozone Precursor Emissions Inventory Baltimore Nonattainment Area Nonroad Source Emissions Distribution by Category.....	17

This page left intentionally blank

1.0 Executive Summary

The purpose of this modification to the Rate of Progress Plan (ROP) for the Baltimore Region is to revise the rate of progress analysis using mobile source emissions estimates generated with EPA's new mobile emission factor model, MOBILE6. The approved Rate of Progress Plan, Appendix C of *Modification to the Phase II Attainment Plan for the Baltimore Region: Revising the Mobile Source Emission Budget, Adding Tier 2 Standards* demonstrates that the Baltimore Nonattainment Area meets the requirements of Section 182(c)(2)(B)(i) of the Clean Air Act as applicable to Severe Areas, Section 182(d), for 2002 and 2005. This is the requirement that a severe area must make a reduction in volatile organic carbon (VOC) emissions equal to 3% of the 1990 baseline VOC emissions for each year beginning after 1996 through 2005. This subsequent revision, *Modification to the Rate of Progress Plan for the Baltimore Region: Revising Mobile Emission Estimates with Mobile6*, demonstrates for the prescribed milestone year 2005, that the 2005 ROP target levels continue to be met despite increased mobile source emissions estimates from MOBILE6 ensuring that the required reductions have been made. Subsequently, the revision establishes the 2005 mobile source emission estimates used in this plan as the 2005 mobile sources emission budgets for ROP. This revision, *Modification to the Rate of Progress Plan for the Baltimore Region: Revising Mobile Emission Estimates with Mobile6*, supersedes all other plans designed to meet this requirement.

The Baltimore Nonattainment Area must meet the 2005 VOC and Nitrogen Oxides (NO_x) target levels shown in Table 1.1 Summary of Emission Benefits for the Baltimore Nonattainment Area to meet the rate of progress requirements. This plan describes the reduction measures to lower VOC and NO_x emissions and offset growth in emissions to reach these target levels. The use of MOBILE6 emissions estimates requires more stringent target levels than those in previous SIP revisions to meet the 42% VOC emissions reduction requirement. Additional stationary source measures were needed to meet these target levels. Additionally, the mobile source emission budgets were lowered to assist in meeting these target levels.

Based on the analysis in this plan and the fulfillment of the ROP requirement, the Baltimore region mobile source emission budgets for ROP for the year 2005 are 55.05 tons per day for VOC and 144.5 tons per day for NO_x. These budgets are more stringent than the previously established 2005 attainment budgets.

Table 1.1 Summary of Emission Benefits for the Baltimore Nonattainment Area (Tons per Day)

Control Measure	2005 VOC	NO_x
Enhanced I/M Tier I Reform Gas NLEV - TIER 2 - HDDE		
Total Mobile	36.75	55.30
Stage II/Refuel	12.65	0.00
Landfills	0.27	0.00
Open Burning	3.52	0.74
Surface Cleaning/ Degreasing	5.76	0.00
Architectural Coatings	5.55	0.00
Consumer Products	2.83	0.00
Auto Refinishing	8.07	0.00
Nonroad Small Gasoline Engines	17.51	-0.45
Nonroad Diesel Engines Tier I & II	0.00	21.62
Marine Engine Standards	1.79	-0.07
Railroads	0.00	4.20
Expandable Polystyrene	0.10	0.00
Yeast Production	0.87	0.00
Commercial Bakeries	0.72	0.00
Screen Printing	0.20	0.00
Federal Air Toxics	0.50	0.00
Graphic Arts-Lithography	2.66	0.00
Graphic Arts - Rotogravure & Flexographic	0.90	0.00
Enhanced Rule Compliance	5.10	0.00
State Air Toxics	0.96	0.00
NO _x RACT	0.00	5.01
NO _x Phase II / III	0.00	127.60
Nonroad RFG	1.39	0.00
OTC – Consumer Products	3.57	0.00
Large Spark Ignition Engines	0.75	0.54
Total	112.43	214.48
Projected Uncontrolled Emissions	333.96	558.94
Emission Level Obtained	221.53	344.47
Emission Level Required	221.53	345.49
Surplus	0.00	1.02

2.0 INTRODUCTION AND BACKGROUND

The purpose of this modification to the Rate of Progress Plan (ROP) for the Baltimore Region is to revise the rate of progress analysis using mobile source emissions estimates generated with EPA's new mobile emission factor model, MOBILE6. The approved Rate of Progress Plan, Appendix C of *Modification to the Phase II Attainment Plan for the Baltimore Region: Revising the Mobile Source Emission Budget, Adding Tier 2 Standards* demonstrates that the Baltimore Nonattainment Area meets the requirements of Section 182(c)(2)(B)(i) of the Clean Air Act as applicable to Severe Areas, Section 182(d), for 2002 and 2005. This is the requirement that a severe area must make a reduction in volatile organic carbon (VOC) emissions equal to 3% of the 1990 baseline VOC emissions for each year beginning after 1996 through 2005. This subsequent revision, *Modification to the Rate of Progress Plan for the Baltimore Region: Revising Mobile Emission Estimates with Mobile6*, demonstrates for the prescribed milestone year 2005, that the 2005 ROP target levels continue to be met despite increased mobile source emissions estimates from MOBILE6 ensuring that the required reductions have been made. Subsequently, the revision establishes the 2005 mobile source emission estimates used in this plan as the 2005 mobile sources emission budgets for ROP. This revision, *Modification to the Rate of Progress Plan for the Baltimore Region: Revising Mobile Emission Estimates with Mobile6*, supersedes all other plans designed to meet this requirement.

2.1 CLEAN AIR ACT REQUIREMENTS

The original Air Pollution Control Act was passed in 1955 in response to public concerns raised over several air pollution episodes that resulted in many fatalities. The most famous episode was the four-day "killer fog" in London, England that claimed 4,000 lives. In 1948, a similar incident in Donora, Pennsylvania culminated in 20 fatalities and 7,000 illnesses. In response to public concerns, Congress adopted air pollution control laws.

With the passage of the original Air Pollution Control Act of 1955 and the Clean Air Act (the Act) of 1963 (amended in 1967, 1970, 1977, and 1990), Congress responded to the air pollution problem by offering technical and financial assistance to the states. The Act of 1963 and subsequent amendments are intended to protect public health and the environment from hazards associated with airborne pollutants. The 1970 Amendments to the Act sharply increased federal authority and responsibility for addressing the air pollution problem; however, Section 107(a) of the Act still provided that each state "shall have the primary responsibility for assuring air quality within the entire geographic area comprising the state". Despite the states' role in attaining and maintaining air quality standards within its borders, the challenges require an extensively cooperative state/federal partnership.

One of the most important components of the 1970 amendments to the Act was the creation of National Ambient Air Quality Standards (NAAQSs) for air pollutants, which endanger public health and welfare. A system of primary NAAQSs was established for the protection of human health and a set of secondary standards was established for the protection of public welfare, property, crops, animals and natural ecosystems. A geographic area that meets or does better than the primary standard is called an attainment area; areas that do not meet the primary standard are called nonattainment areas. The six criteria pollutants for which NAAQSs have been established are: lead (Pb), carbon monoxide (CO), particulate matter (PM), sulfur dioxide (SO₂), nitrogen dioxide (NO₂), and ozone (O₃). The last three pollutants are serious respiratory irritants. They are highly reactive

compounds that can oxidize or burn tissues of the mucous membranes and lungs. Prolonged exposure can cause permanent scarring of lung tissue and reduced lung capacity.

Despite the 1970 legislation, air quality in many areas of the country still did not meet the NAAQSs, especially for ozone. Congress amended the Act again in 1977, partly to address those areas that had not attained the NAAQSs. SIP revisions submitted pursuant to the requirements of the 1977 amendments yielded progress in meeting the NAAQSs. However, many areas remained nonattainment.

In 1990, Congress once again enacted comprehensive amendments to the Act to revise State Implementation Plan (SIP) requirements for nonattainment areas. The requirements of the 1990 Amendments to the Act represent an unprecedented commitment to protecting public health and the environment. Title I of the Act classifies areas that exceed national health-based air quality standards based upon the severity of their pollution problem. In accordance with these classifications, the Act sets new deadlines for achieving the standard, and requires a minimum set of basic measures for each classification to ensure early progress toward this goal. Areas with more severe classifications must implement increasingly stringent measures.

One major impact the Act had on the State of Maryland was to redefine and enlarge the ozone nonattainment areas. The Baltimore Nonattainment Area remained unchanged. Cecil County was added to the Philadelphia-Wilmington-Trenton nonattainment area in 1990. The Washington, D.C. Nonattainment Area expanded to include Calvert, Charles, and Frederick counties. Table 2.1 shows the current designations for the State of Maryland. This document deals only with the Baltimore Nonattainment Area.

In addition to redefining and enlarging the nonattainment areas, the Act included specific emission reduction requirements depending on the severity of pollution in a nonattainment area. These emission reduction requirements insure that areas make continuous progress towards attainment of the NAAQSs. Mandatory emission control programs, specific emission reduction requirements and deadlines for attainment of the NAAQSs for ozone vary according to the classification of the nonattainment area. Areas with more serious nonattainment classifications must meet the mandates of the less severe classifications plus the more stringent requirements of their classification. The attainment date for the Baltimore nonattainment area is the year 2005.

Congress established Rate of Progress requirements: specific emission reduction requirements where the timing and quantity of the reductions depends on the nonattainment area classification. A severe nonattainment area must reduce emissions of VOCs by 15 percent between 1990 and 1996, and reduce emissions of VOCs and/or NOx by 3 percent per year between 1997 and 2005. As a separate requirement, state and local air pollution agencies must show through computer modeling that emissions reduction strategies chosen for the area will ultimately result in attainment of the ozone NAAQS.

The ozone problem is regional in nature since ozone travels across county and state lines. The Act created regions such as the Ozone Transport Region (OTR) to facilitate coordination and consensus building between states in areas with pollution transport problems. The Northeast OTR comprises Maine, New Hampshire, Vermont, Massachusetts, Connecticut, New York, Rhode Island, New Jersey, Delaware, Maryland, Pennsylvania, Washington, DC, and Virginia. The coordinating body

for the Northeast OTR is the Ozone Transport Commission (OTC). All Maryland counties are part of the Northeast OTR. The OTR is not a nonattainment classification, but does have certain requirements associated with it.

Table 2.1: Maryland 1-Hour Ozone Classifications

<u>AREA</u>	CLASSIFICATION	ATTAINMENT DATE (NOVEMBER 15)
BALTIMORE, MD Anne Arundel County, Baltimore City, Baltimore County, Carroll County, Harford County, Howard County	Severe Nonattainment Part of the Ozone Transport Region	2005
WASHINGTON, D.C. Calvert County, Charles County, Frederick County, Montgomery County, Prince George's County	Reclassified to Severe Nonattainment (2003) Part of the Ozone Transport Region	2005
PHILADELPHIA/WILMINGTON/TRENTON Cecil County	Severe Nonattainment Part of the Ozone Transport Region	2005
KENT/QUEEN ANNE'S COUNTY Kent County, Queen Anne's County	Marginal Nonattainment Part of the Ozone Transport Region	1993
OTHER MARYLAND COUNTIES Allegany, Caroline, Dorchester, Garrett, Somerset, St. Mary's, Talbot, Washington, Wicomico, Worcester	Unclassifiable (Insufficient data to classify) ¹ Part of the Ozone Transport Region	N/A

2.2 THE STATE IMPLEMENTATION PLAN (SIP) PROCESS

The Act requires states to develop and implement ozone reduction strategies in the form of a State Implementation Plan (SIP). The SIP is the state's "master plan" for attaining and maintaining the

¹ Areas which are unclassified are not nonattainment areas.

NAAQS. The SIP is revised as necessary to ensure that compliance with federal standards is achieved as expeditiously as possible.

EPA has identified four criteria to determine whether emission reductions from control strategies are creditable in the SIP. These four criteria are outlined in the General Preamble to Title I of the Clean Air Act Amendments of 1990, which can be found in *Federal Register* 13567. The four criteria are:

- ❖ Emissions reductions ascribed to control measures must be quantifiable and measurable (*quantifiable*);
- ❖ Control measures must be enforceable, in that the state must show that they have adopted legal means for ensuring that sources are in compliance with the control measure (*enforceable*);
- ❖ Measures are replicable (*real*); and
- ❖ The control strategies are accountable in that the SIP must contain provisions to track emissions changes at sources and to provide for corrective actions if the emissions reductions are not achieved according to the Plan (*permanent*).

Once a SIP revision is approved by the Administrator of the EPA, it is enforceable as a state law and as federal law under Section 113 of the Act. If the SIP is found to be inadequate in the EPA's judgment and if the state fails to make amendments to rectify the problem, under §110(c)(1), the EPA Administrator issues binding amendments to the SIP. These amendments are referred to as the federal implementation plan (FIP). EPA has released guidance on how to take credit for voluntary measures in the SIP. Voluntary measures can be used to generate up to 3% of the required emission reductions if this guidance is followed.

EPA must impose sanctions if a state:

- ❖ Does not submit a SIP revision; or
- ❖ Submits a SIP revision that the EPA does not approve; or
- ❖ Fails to implement the SIP revision.

Possible sanctions include:

- ❖ Requiring new large industries, or those that want to expand, to offset emissions by 2:1, which could deter economic growth;
- ❖ Withholding federal highway funds;
- ❖ Withholding air quality planning grants; or
- ❖ Imposing a federal implementation plan (FIP).

The Act allows the EPA to exercise discretion in imposing sanctions under certain circumstances. In general, EPA can delay imposing sanctions for 18 months if a state is making a good faith effort to comply with the requirement. The EPA promulgated a rule regarding discretionary sanctions so that after 18 months mandatory sanctions would begin with 2:1 offsets for new stationary sources for the first six months followed by withholding federal transportation funds. Failure to submit or implement a SIP can have significant consequences for transportation plans under the transportation

conformity requirements.

2.3 The Phase II Rate of Progress Plan

A March 2, 1995 Memorandum, entitled "Ozone Attainment Demonstrations" from EPA Assistant Administrator Mary D. Nichols to the EPA Regional Administrators sets forth guidance for an alternative approach to submitting these requirements to provide States flexibility in their planning efforts. The memorandum established a two-phased approach to development of the Post-1996 Rate-of-Progress Plan and the Attainment Demonstration. The SIP for the first phase was submitted to EPA on December 1997. The submittal consisted of a plan to fulfill the Rate of Progress requirement for 1999 and photochemical modeling completed to date. The Phase II SIP revision fulfills Rate-of-Progress requirements for 1999, 2002 and 2005 for the Baltimore Nonattainment Area.

Unlike the emissions reductions required in the *15 Percent Rate-of-Progress Plan*, Section 182(c)(2) of the Act allows states to use NO_x emission reductions to meet the 9 percent rate-of-progress requirement as well as VOC reductions. NO_x emissions reductions can be substituted for VOC reductions provided they meet the criteria outlined in "EPA's NO_x Substitution Guidance". Emission reductions of NO_x may be substituted for required VOC reductions under the following criteria. The nonattainment area must show that NO_x reductions are necessary to reach attainment. Emission reductions of NO_x can be substituted for required VOC reductions at a ratio equal to the ratio of NO_x to VOC emissions in the baseline inventory. This revision uses a combination of VOC and NO_x emission reductions to meet the 2005 Rate-of-Progress reduction requirements.

3.0 1990 BASE YEAR INVENTORY

3.1 BACKGROUND AND REQUIREMENTS

The Act requires states to compile an emissions inventory to use as the foundation for planning strategies necessary to attain the NAAQSs. The Act requires this base year inventory for all classes of nonattainment areas (42 U.S.C.A. Section 7511(a)(1)), and EPA requires a state-wide inventory for those states that are part of the Northeast OTR. The base year inventory is also the foundation for other required inventories that this chapter explains in greater detail:

- ❖ The adjusted base year inventory;
- ❖ The periodic inventory;
- ❖ The Reasonable Further Progress (RFP) inventory; and
- ❖ The projection inventory.

The 1990 Base Year Inventory was required as part of the November 15, 1992 SIP submittals. The complete inventory documentation is available for review and is entitled *1990 Base Year Inventory for Precursors of Ozone, Volatile Organic Compounds (VOC), Carbon Monoxide (CO), Nitrogen Oxides (NO_x) for the State of Maryland, Volumes 1-6, September 30, 1993* (MDE, 1993a). As methodologies for estimating emissions have improved, the inventory estimates have been modified to incorporate these new methodologies. The latest modification is revising the 1990 and 2005 mobile source emission estimates using the MOBILE6 emission factor model as documented in *Modification to the Phase II Attainment Plan for the Baltimore and Cecil County Nonattainment Areas: Revising the Mobile Source Emission Budgets Using MOBILE6 (May 2003)*.

This chapter summarizes the approach used to develop the base year inventory for ozone precursors during the ozone season, and presents inventory results for each pollutant. The base year inventory is an inventory of actual emissions for calendar year 1990. It includes the ozone precursor pollutants: volatile organic compounds (VOCs) and oxides of nitrogen (NO_x). Emissions estimates are for a typical peak ozone season weekday. The peak ozone season for the Baltimore Nonattainment Area is June, July and August.

3.2 SOURCE SECTORS

Emission sources are divided into five sectors:

- ❖ Point sources: industrial and commercial sources with sufficient emissions to quantify on an individual basis;
- ❖ Area sources: smaller industrial, commercial, and business sources whose emissions are too low to quantify individually but collectively contribute a significant amount of emissions;
- ❖ Onroad mobile sources: traditional highway vehicles, such as cars and trucks;


- ❖ Nonroad mobile sources: sources powered by internal combustion engines that are not traditionally used for highway transportation, such as lawn mowers, airplanes, boats and construction equipment; and
- ❖ Biogenic sources: natural emissions sources of VOCs, such as trees, grasses, and crops.

Table 3.1 presents the base year inventory by source type. Figure 3.1 displays that information for VOC and NOx emissions in the Baltimore Nonattainment Area in graphical format.

Table 3.1: 1990 Base Year Ozone Precursor Emissions Inventory Emissions Summary By Source Type

Nonattainment Area Source Type	Tons Per Day	
	VOC	NOx
Baltimore Nonattainment Area		
Point Sources	42.0	223.2
Area Sources	122.4	13.7
Nonroad Sources	44.7	71.5
Mobile Sources	165.1	228.2
Subtotal:	374.20	536.60

Figure 3.1: 1990 Base Year Emissions Inventory (Tons/Day) Baltimore Nonattainment Area

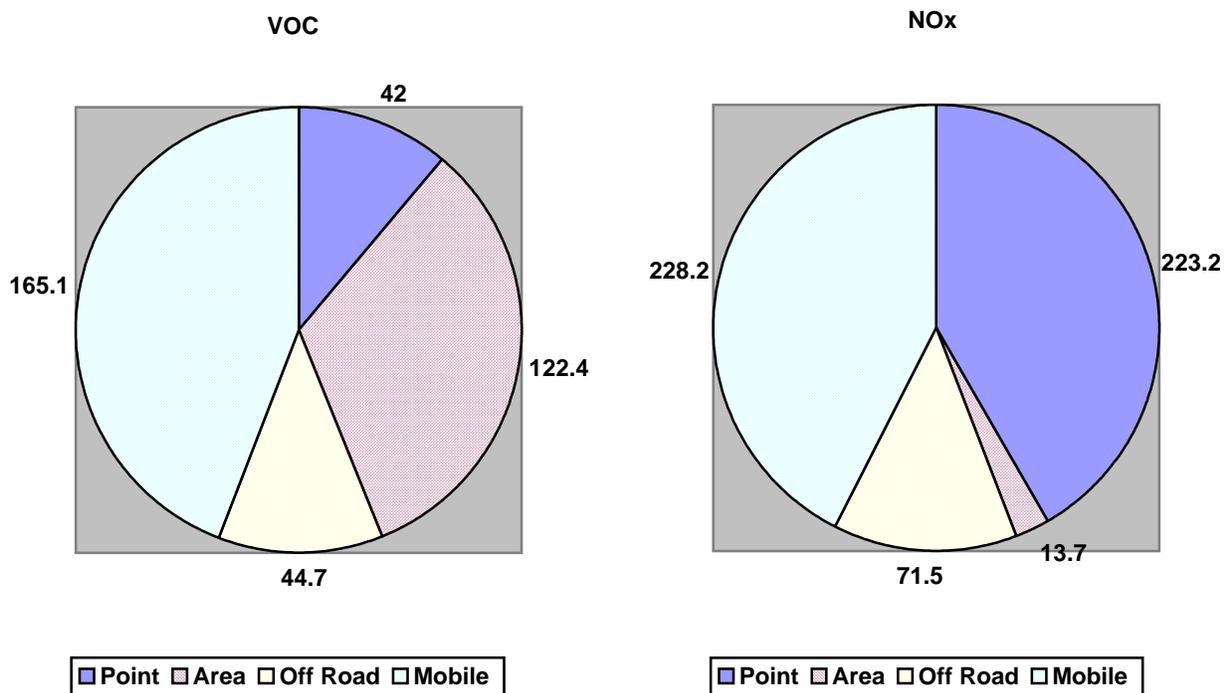

3.2.1 POINT SOURCES

A point source in the base year inventory for the Baltimore Nonattainment Area is defined as a stationary source of emissions that emits annually at least 25 tons of VOCs, 100 tons of CO or 25 tons of NO_x.

Emissions for point sources are estimated using the following types of methodologies:

- ❖ EPA-supplied emission factors;
- ❖ Material balance emissions calculations;
- ❖ Source-based test data calculations; or
- ❖ Agency- or company-generated emission factors

EPA guidance requires that the Department adjust the inventory to take into consideration equipment failures and the inability of control programs to achieve 100% effectiveness at all times. This analysis, referred to as rule effectiveness (RE), means that when Department staff conduct RE studies, they take into account various factors including non-compliance with existing rules, control equipment downtime, operating and maintenance problems, and process upsets due to human or other errors. RE may also indicate errors in the projection of emissions estimates as well as the actual emissions themselves. RE adjusts emissions to correct for these failures and uncertainties to provide a more reliable estimate for planning and modeling.

The Department used the 80% default factor in several RE applications, and concentrated on RE improvements for key sources. Although the Department recognizes that the EPA default RE factor of 80% inadequately represents the variation that exists in the effectiveness of different industry process unit/control device combinations, staff limitations have precluded the Department's extensive use of surveys or Stationary Source Compliance Division (SSCD) studies to develop alternatives.

The Department did not apply RE to several source categories. RE was not applied to uncontrolled sources, to sources that have undergone an irreversible process change, nor to sources whose emissions were calculated using direct determinations (material balance), unless a control device was employed. Additionally, the Department did not apply RE to sources where the operation of process equipment without an operational control device is mechanically or electronically prevented. This included some solvent vapor recovery processes and web printing equipment. Although the Department concedes that these electronic lockouts can fail or be disabled, the former is rare and the latter is a criminal offense.

The Department has not collected extensive data on the temporal distribution of emissions. Typically, companies are required to quantify annual emissions by calendar quarter. For purposes of modeling, however, the Department obtained daily NO_x emissions for specific ozone episodes. More specific information will be collected under the Certified Emissions Statement regulation, Code of Maryland Regulations 26.11.01.05-1 (COMAR, 1993).

The Department calculated peak ozone season emissions by the following method:

- 1) The Department converted annual emissions in pounds per year into pounds per day emissions by dividing the annual emissions by the number of operating days in the year.

- 2) The pounds per day emissions were then multiplied by a seasonality factor. The seasonality factor was based on the quarterly percentage of operations (estimated by the company) for June, July, and August. The factor was calculated by multiplying the second quarter percentage by one third and the third quarter percentage by two thirds. The sum of the two results was then divided by 0.25 to calculate the seasonality factor.
- 3) The seasonality factor obtained in Step 2 was then multiplied by the pounds per day emissions determined in Step 1 to get the seasonally adjusted emissions.

This methodology conforms to EPA-accepted practices. For a more detailed discussion of the methodology refer to *Volume 1, Section 2: Point Sources and Volumes 3-5: Documentation for Individual Point Sources* of the complete inventory documentation. Table 3.2 displays the VOC emissions for the Baltimore Nonattainment Area, a highly industrialized area of Maryland. Figures 3.2 and 3.3 illustrate, in the form of bar graphs, the comparative emissions levels from the various point sources present in the Baltimore ozone nonattainment area.

Table 3.2: 1990 Base Year Ozone Precursor Emissions Inventory Point Source Emissions Totals By Category In The Baltimore Nonattainment Area

Baltimore Area	VOC tons/day	NOx tons/day
Petroleum Product Handling	8.2	0.0
Industrial Processes	18.5	43.8
Industrial Surface Coating	12.7	0.7
Other Solvent Use	0.9	0.0
External Combustion Sources	1.0	166.5
Stationary Internal Combustion	0.3	7.0
Waste Disposal	0.4	5.2
Total	42.0	223.2

Figure 3.2: 1990 Base Year Ozone Precursor Emission Inventory Baltimore Nonattainment Area VOC Point Source Emission Distribution By Category


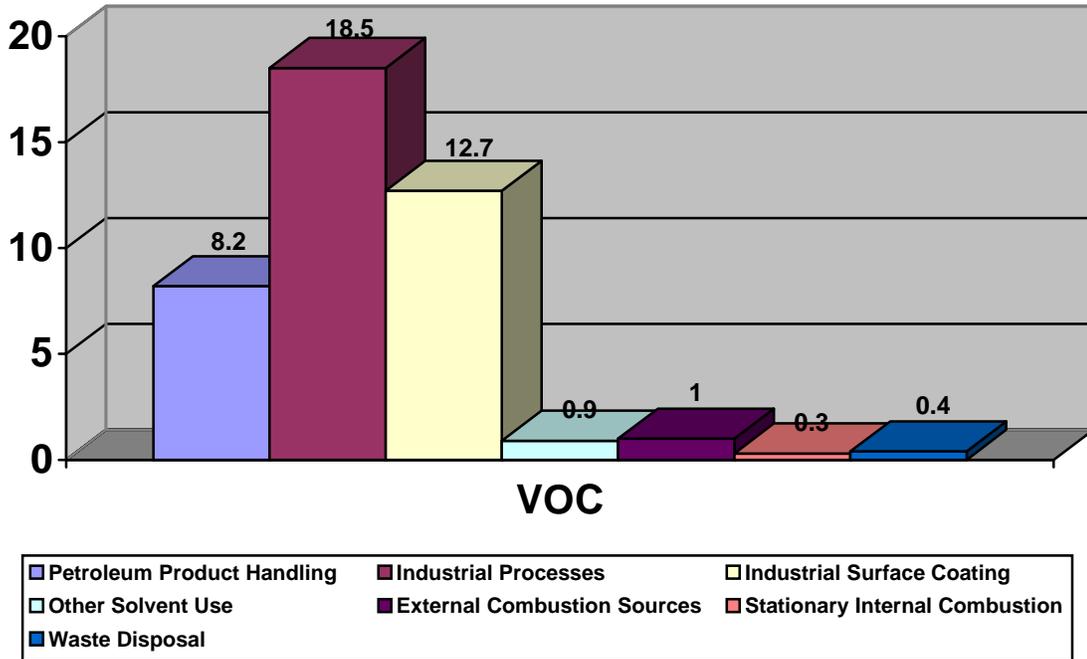



Figure 3.3: 1990 Base Year Ozone Precursor Emission Inventory Baltimore Nonattainment Area NOx Point Source Emission Distribution By Category

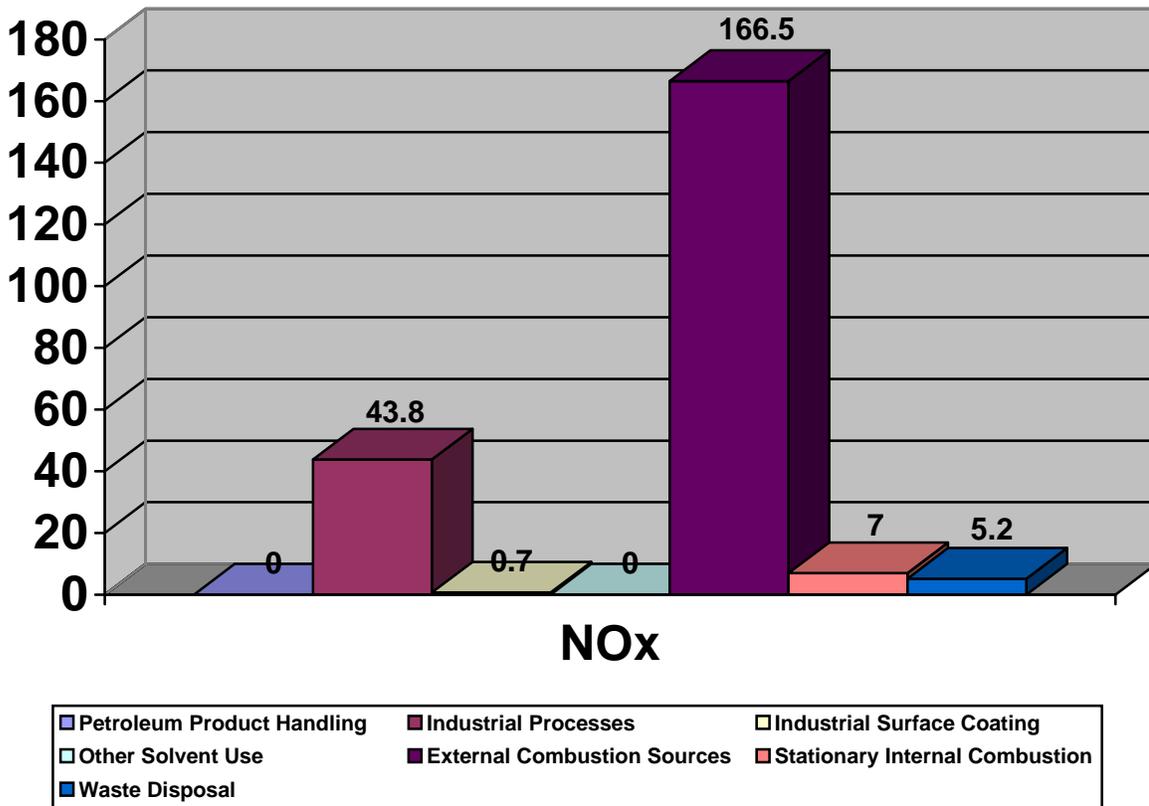

3.2.2 AREA SOURCES

The area source component of the emissions inventory is an estimate of the emissions of sources too numerous to quantify them on an individual basis. The amount of emissions from each individual source is small, but collectively emissions from these sources represent a sizable portion of the inventory. In some cases, an area source category may represent the emissions from a specific activity associated with source. For example, gasoline distribution is broken into tank breathing and refueling emissions. Both categories represent emissions from service stations. Gasoline distribution also includes emissions from tank trucks in transit, another area source category, and bulk terminals, which are included in the point source inventory. Figure 3.4 displays the VOC emissions for the Baltimore nonattainment area.

Figure 3.4: 1990 Base Year Ozone Precursor Emission Inventory Baltimore Nonattainment Area - Area Source Emission Distribution By Category (Tons per Day)

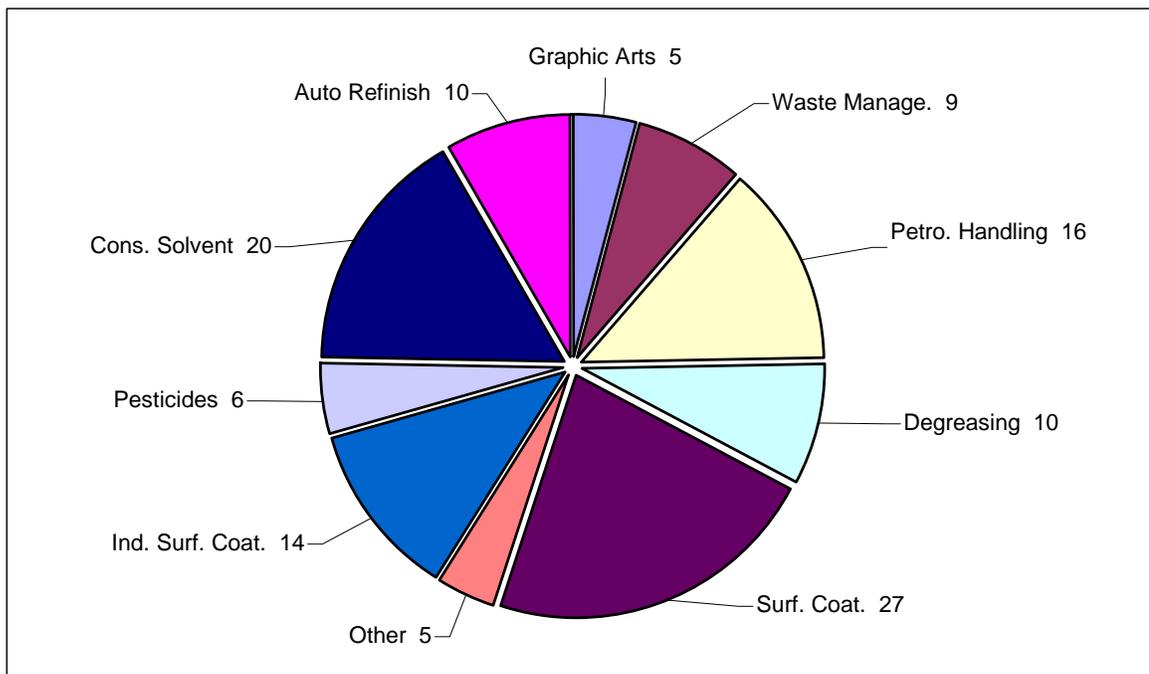

The Department developed area source emissions estimates by multiplying an EPA-published emission factor by the activity indicator for each source category. Since source activity can vary throughout the year (for example, pesticides are applied more during the summer) seasonal adjustment factors developed by the EPA are also used to compile the inventory. In addition, as per EPA guidance, a rule effectiveness factor of 80% is assumed where applicable.

Another important consideration in developing an area source inventory is variations in the level of activity throughout the week. For example, automobile-refinishing establishments may typically operate only five days per week while vehicles are refueled seven days per week.

The Department used one of four emission factor-based estimation approaches to calculate area

source emissions:

- ❖ Per-capita emission factors;
- ❖ Commodity consumption-related emission factors;
- ❖ Level-of-activity-based emission factors; and
- ❖ Employment-related emission factors.

Most of the emission estimates are calculated using procedures described in the EPA guidance document entitled *Procedures for the Preparation of Emission Inventories for Carbon Monoxide and Precursors of Ozone, Volume I: General Guidance for Stationary Sources*.

The Department obtained activity and commodity level data from publications containing census and economic data, and from letter communications with individual companies and government agencies. Emission factors are from *Procedures, May 1991 and Compilation of Air Pollutant Emission Factors, Fourth Edition, Volume I: Stationary Point and Area Sources, AP-42*.

For certain categories, the Department subtracted ozone precursor emissions included in the point source inventory from the area source totals to avoid double counting. These categories include auto refinishing, industrial coating operations, and printing.

For a further discussion of the methodology used to calculate the area source emission inventory refer to *Volume 1, Section 3: Area Sources, and Volume 6: Area Source Supporting Documentation* of the complete inventory documentation.

3.2.3 ONROAD MOBILE SOURCES

The latest version of EPA's mobile emission factor model, MOBILE6, is a major revision based on new test and field data and accounts for changes in vehicle technology. The model also provides the capability to analyze the benefits of a number of new regulations. In addition, the model includes an improved understanding of in-use emission levels and the factors that influence them, resulting in the need for significantly more detailed input data.

As compared to MOBILE5b, the model previously used to estimate mobile emissions, MOBILE6 has a significant impact on the emission factors, benefits of available control strategies, effects of new regulations and corrections to basic emission rates. Consequently, the emission rates are different and it is difficult to compare the results directly to previous runs conducted with MOBILE5b. For this reason, 1990 emission totals are reanalyzed using MOBILE6 and its features to process data collected earlier in the development of the emission estimates for previous SIPs.

Baltimore Region

The Baltimore Region uses a cooperative process to develop mobile source emission estimates and projections that are used in formulating mobile source emission budgets. The following agencies are involved in the process: the Maryland Department of the Environment, the Maryland Department of Transportation and the Baltimore Regional Transportation Board (BRTB) and their staff, the Transportation Planning Division of the Baltimore Metropolitan Council (BMC).

The process develops activity levels for vehicles through modeling that simulates travel patterns in the region. Estimates for the number of vehicle miles traveled and the number of vehicle trips are key outputs from this type of modeling. The BMC staff has made significant changes to the regional travel demand model during the past three years, which have provided a more reliable model for future year projections. The main enhancements to the model were an enhanced zonal structure and highway networks, and new trip attraction rates. Extensive documentation on the travel demand modeling, 2000 Travel Model Validation, is available from the Transportation Division of the BMC.

These activity outputs combine with other data inputs such as the age of the vehicles, the speed of travel, and other vehicle descriptives in the MOBILE models to produce emission factors that are tabulated and used appropriately based on activity levels to produce the final emission estimate. Development of these inputs is described in Appendix B: An Explanation of Methodology for Developing Mobile Source Emissions Budgets Using MOBILE6.

3.2.4 NONROAD MOBILE SOURCES

Nonroad mobile sources include those vehicles and equipment which are powered by internal combustion engines, but which are not normally operated on public highways. This includes mobile construction and industrial machinery and farm equipment, lawn and garden equipment and recreational boats. Emissions from aircraft and airports, railroads, and sea vessels are also included in this portion of the inventory.

Section 213(a) of the Act mandates that the EPA conduct a study of emissions from nonroad engines and vehicles in order to determine if these emissions cause or significantly contribute to air pollution. The EPA contracted with Energy and Environmental Analysts, Inc. (EEA) to conduct an emissions inventory for 33 severe and serious ozone nonattainment areas. The study covered nine nonroad equipment categories:

- ❖ Lawn and garden equipment;
- ❖ Agricultural or farm equipment;
- ❖ Logging equipment;
- ❖ Industrial equipment;
- ❖ Construction equipment;
- ❖ Light commercial equipment;
- ❖ Airport service equipment;
- ❖ Recreational land vehicles or equipment; and
- ❖ Recreational marine equipment.

Data from the study entitled *Nonroad Engine and Vehicle Emission Study* was provided to the nonattainment areas under study for use in developing the 1990 base year inventory.

The EEA inventory weighted use equally throughout the week. A Baltimore survey of boat owners found that use of personal boats was split 40/60 weekday to weekend use. Maryland adjusted the EEA inventory to account for this and for a 50/50 split of weekday/weekend use of lawnmowers.

The remaining six nonroad categories not covered in the EEA study are railroads, commercial aviation, air taxis, general aviation, military aviation and vessels. Calculations for these categories


were performed by the Department using methodologies in *Procedures for Emission Inventory Preparation, Volume IV: Mobile Sources, Revised*.

Aircraft, marine vessel and railroad activities were considered constant throughout the year. The data necessary to estimate a seasonal variation in their emissions was not readily available, and their emissions represent a small fraction of both the total inventory and the nonroad inventory.

Table 3.3: Nonroad Source Emissions In Baltimore

Nonroad Source Category	Emissions (tons per day)
Lawn & Garden Equipment	17.7
Aircraft Services	0.9
Off-Road Vehicles	0.9
Recreational Boating	7.7
Construction	5.5
Industrial	1.8
Agricultural	1.7
Light Commercial	3.8
Logging	0.3
Other	4.4
Total	44.7

Figure 3.5: 1990 Base Year Ozone Precursor Emissions Inventory Baltimore Nonattainment Area Nonroad Source Emissions Distribution by Category

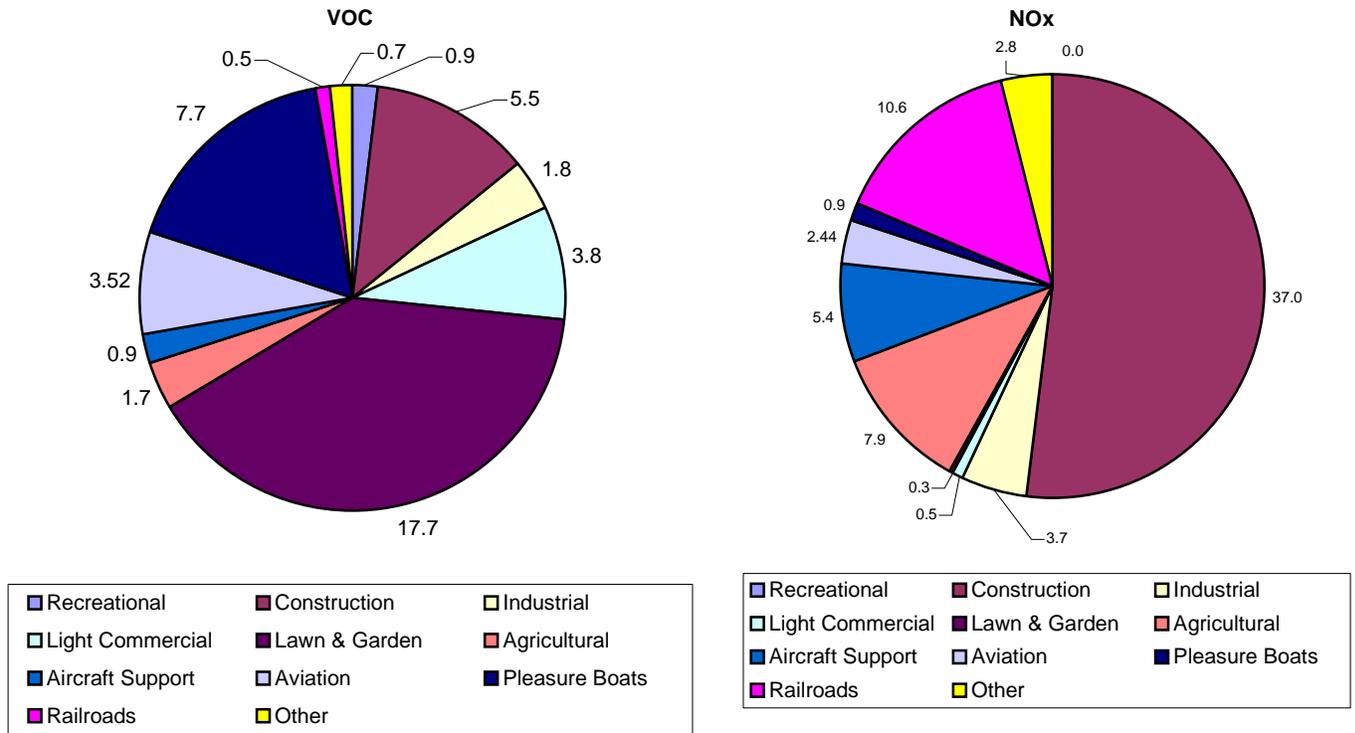

3.2.5 BIOGENIC EMISSIONS

VOCs are emitted from biogenic sources (vegetation). The Department used the EPA *Personal Computer Version of the Biogenic Emissions Inventory System (PC-BEIS)*, to calculate emissions from biogenic sources. PC-BEIS calculates VOC emissions in tons per day based on land use, leaf biomass factors (mass of dry leaf related to forest area), emission factors for different chemical species, and meteorological data.

The hourly meteorological data (wind speed, temperature, sky cover and relative humidity) were obtained from the National Weather Service at Baltimore Washington International Airport for July 6, 1988. The Introduction to *User's Guide to the Personal Computer Version of the Biogenic Emissions Inventory System (PC-BEIS)*, recommends for a base year inventory to select a day based on the following steps:

- ❖ Select top ten days with highest hourly ozone readings over most recent three years of monitoring
- ❖ Obtain National Weather Service data for daily maximum temperature on each of the ten days
- ❖ Rank temperature maxima from highest to lowest
- ❖ Select fourth highest based upon maximum daily temperature

❖ Use hourly meteorological data as above for this day as input to PC-BEIS

Using these criteria the Department selected July 6, 1988.

Land use data are from the Oak Ridge National Laboratory's GEOECOLOGY database. It is aggregated into 25 land use types. The forest types are designated as primarily oak, other deciduous and mostly coniferous to match published emission factors in Lamb et al.²

Table 3.4 summarizes the biogenic emissions for the state by county. Subtotals for the nonattainment areas are included.

Table 3.4: Emissions from Biogenic Sources by County

County	VOC (tpd)
Allegany	47.77
Anne Arundel	29.27
Baltimore	43.35
Calvert	22.01
Caroline	29.47
Carroll	38.91
Cecil	32.96
Charles	44.37
Dorchester	50.43
Frederick	57.95
Garrett	64.01
Harford	43.94
Howard	21.25
Kent	33.83
Montgomery	38.35
Prince George's	43.15
Queen Anne's	36.88
Saint Mary's	35.69
Somerset	23.83
Talbot	16.54
Washington	43.16
Wicomico	36.25
Worcester	43.94
Baltimore City	3.37
Baltimore Area	180.09
Washington Area (MD)	205.83
Kent/Queen Anne's	70.71

² Lamb, B., A. Guenther, D. Gay, and H. Westburg (1987): A national inventory of biogenic hydrocarbon emissions. *Atmospheric Environment*, **21**, pp. 1695-1705.

Unclassified Counties	391.09
-----------------------	--------

4.0 THE PROJECTED EMISSIONS INVENTORIES

The Act requires all ozone nonattainment areas classified as moderate and above to achieve a 15 percent reduction in actual VOC emissions by 1996. Also, the Act requires that emissions be reduced by 3 percent every year until 2005. The reduction must be calculated from the anthropogenic VOC and NO_x emission levels reported in the state's 1990 base year inventory after those levels have been adjusted for pre-1990 controls. The 1990 base year inventory is reported in Section 3. This section presents the projection year inventories, the state's estimation of the level of VOC and NO_x emissions to be expected if no further action is taken to control VOC or NO_x emissions.

The VOC and NO_x projected year emissions inventories were derived by applying the appropriate growth factors to the 1990 base year emissions inventories. The EPA guidance describes four typical indicators of growth. In order of priority, these are:

- ❖ Product output,
- ❖ Value added,
- ❖ Earnings, and
- ❖ Employment

The population, households, and employment factors were based on Round 5 forecasts. For point and area, the Bureau of Economic Analysis (BEA) factors were used to project growth except for utilities and nonroad mobile sources. For these categories, the Economic Growth Analysis System (EGAS) was used as recommended by the EPA.

The results from using earnings data to project the point, area and nonroad sources using BEA and EGAS factors are presented. Mobile source growth is based on the computer modeling of travel demand for the Baltimore nonattainment area. Separate documentation of the travel demand modeling from the Baltimore Metropolitan Council transportation staff. A brief discussion of the indicators and a detailed description of the BEA and EGAS methodology is provided in this section.

4.1 GROWTH FACTOR METHODOLOGY – BEA EARNINGS METHODOLOGY

4.1.1 DESCRIPTION OF DATA SOURCE

Growth rates for most point and area source categories in this study are derived from projection of industrial earnings made by the U.S. Department of Commerce, Bureau of Economic analysis (BEA, 1990). Using BEA industrial earnings to project emissions is consistent with EPA guidance on preparing emission projections. BEA projects State-specific industrial earnings for 57 industrial groups for the following years: 1995, 2000, 2005, 2010, and 2040. These 57 industrial groups can, for the most part, be matched with 2-digit Standard Industrial Classification (SIC) codes. Some new pseudo-SIC codes were assigned in the (99x) range for composite categories or categories not covered in the SIC system, such as population and vehicle miles traveled (VMT).

4.1.2 GROWTH PROJECTION METHODOLOGY

Growth rates for area source and VOC point sources came from the BEA earnings data. The methodology for developing NOx point source, and nonroad mobile source growth is presented separately in this section, along with justification for the distinct methodologies used. The methodology for calculating VMT growth rates is also presented separately, later in this section. BEA supplies historical data for 1973, 1979, 1983, and 1988 for each category for which it makes projections.

The first step in developing growth rates based on BEA factors is to estimate earnings in the base year (1990) and the projection years for which earnings data do not exist (1996, 1999, 2007). This is done by assuming straight-line growth between the two closest years for which data exists. For example, 1990 earnings were estimated using the following formula:

$$\text{EARN}_{90} = \text{EARN}_{88} + [2/7 * (\text{EARN}_{95} - \text{EARN}_{88})]$$

where:

$$\text{EARN}_{XX} = \text{BEA earnings estimate in year } xx$$

After using this process to estimate data for the base year and all projection years, average annual growth rates were calculated between the base year and each projection year:

$$\text{AAGR}_{\text{BYPY}} = [(\text{EARN}_{\text{PY}} - \text{EARN}_{\text{BY}}) * (\text{PY} - \text{BY})] * 100$$

where:

$$\text{AAGR}_{\text{BYPY}} = \text{average annual growth rate from the base year to the projection year (percent)}$$

$$\text{EARN}_{\text{PY}} = \text{earnings in the projection year}$$

$$\text{EARN}_{\text{BY}} = \text{earnings in the base year}$$

4.1.3 OFFSET PROVISIONS

The Act requires that emission growth from major stationary sources in nonattainment areas be offset by reductions that would not otherwise be achieved by other mandated controls. The offset requirement applies to all new major stationary sources and existing major stationary sources that have undergone major modifications. Increases in emissions from existing sources resulting from increases in capacity utilization are not subject to the offset requirement. For the purposes of the offset requirement in severe ozone nonattainment areas such as the Baltimore nonattainment area, major stationary sources include all stationary sources exceeding 25 tons per year of VOC and NOx emissions, and 100 tons per year of CO emissions.

4.2 GROWTH FACTOR METHODOLOGY - EGAS GROWTH FACTORS

EGAS is composed of three tiers: a national economic tier, a regional economic tier, and a growth factor tier. Each of these tiers will be discussed briefly.

Tier 1: The National Economic Tier

The national economic tier includes a Regional Economic Modeling Institute (REMI) model of the United States which includes a baseline forecast calibrated to the one released by the Bureau of Labor Statistics (BLS). Although the BLS forecast is updated every two years, REMI updates the forecast using data released annually by BEA. In addition, the EGAS national economic tier contains the option to use economic forecasts from Wharton Economic Forecasting Association (WEFA). WEFA forecasts national economic activity under low growth, base case high growth, and cyclical growth scenarios.

The function of the national tier in EGAS is two-fold. First, the inclusion of a national forecasting capability allows EPA to forecast urban and regional economic growth using a common assumption about national economic growth. Second, it provides users with the ability to use the most current national economic forecasts and to simulate the effects of different levels of national growth on emission-producing activity in nonattainment areas.

Tier 2: The Regional Economic Tier

The regional economic tier includes separate economic models for each of the nonattainment areas and attainment portions of the States. The largest geographic area covered by an economic model is a State.

The regional economic models included in EGAS were built by REMI. The models simulate interaction between the 14 major sectors of an economy and produce estimates of employment and value added for 210 sectors. The 210-sector outputs are identified by BLS industrial codes. The BLS codes are closely related to three-digit SIC codes. Outputs from the regional models are used as input data for the growth factor tier.

The REMI models are designed to forecast future activity in an area and to simulate the effects of a policy change in an area. The models come with a capability for the user to simulate the effects of changes in almost 400 economic policy variables and over 70 demographic variables. The list of policy variables included with EGAS was reduced to 84 variables. Two criteria were used for choosing which policy would be included in the system: whether the policy variable relates to the implementation of the Act and whether the variable is one which local personnel using EGAS would be knowledgeable of, particularly changes of proposed changes. For example, industrial capital costs were included as a variable because that variable satisfies the first criterion. This variable will allow users to simulate the effects of control costs associated with the Act. Policy variables that satisfy the second criterion include local tax rates and State and local government spending. Policy variables that do not satisfy either criterion, and therefore are not in EGAS, include demographic variables such as birth and survival rates, and economic variables such as demand for goods not affected by the Act.

The REMI models and outputs contribute to the development of credible growth factors for future-year inventories in the following ways:

- ❖ Forecasts of activity from emission-producing sources were to be developed for both the attainment and nonattainment portions of States, allowing growth rates to differ between rural and urban portions of a State.
- ❖ Outputs from the models are used to produce area-level estimates of fuel consumption and physical output.
- ❖ The effects of a nonattainment area policy on the surrounding areas can be assessed.
- ❖ Information on local policies can be entered directly into the REMI models. This ability allows users to include the effects of local policies when developing forecasts.

REMI outputs and the growth factor tier are linked in the following specific ways:

- ❖ REMI models provide income forecasts for estimating residential fuel consumption.
- ❖ REMI models provide population and personal income forecasts for estimating commercial energy consumption.
- ❖ REMI models provide the forecasts of the relative costs of capital, labor, and materials for estimating industrial fuel consumption.
- ❖ REMI models provide industry-specific employment and value added forecasts for estimating physical output.

Tier 3: The Growth Factor Tier

The third tier of EGAS is the largest portion of the system. Housed within the third tier are commercial, residential, industrial, and utility energy models; a physical output module; and a Crosswalk. Each of these modules will be discussed.

Utility Energy Models

The energy models in the system were developed by Argonne National Laboratories (ANL) and are currently being used for the National Acid Precipitation Assessment Program (NAPAP). The residential energy model, the Household Model of Energy (HOMES), was modified for use in the NAPAP model set in the mid-1980s. In 1989-1990, ANL updated HOMES to include the capability to model residential fuel consumption at the State, rather than Census, level. For use in EGAS, two changes were made to HOMES. First, the base year of the model projections was updated to 1990 using data from the State Energy Data Report (SEDS). Additionally, the capability to estimate growth in residential fuel consumption at the sub-State level was developed. REMI forecasts of population data for nonattainment areas and attainment portions of States are input with State-level fuel price forecasts to develop estimates for residential fuel consumption growth for seven fuels for each of the nonattainment areas and attainment portions of States in EGAS.

Commercial Energy Model

The Commercial Sector Energy Model (CSEMS), was also developed for use in the NAPAP model set in the mid-1980s and updated in 1989-1990 to estimate commercial fuel consumption at the State level. Like HOMES, the model was modified for use in EGAS to estimate commercial energy consumption growth for six fuels for nonattainment areas and surrounding attainment portions of States. The base year for the model projections was updated to 1990 using data from SEDS. Inputs to CSEMS include State-level fuel price forecasts and REMI forecasts of population and personal income at the sub-State level.

Industrial Energy Model

The Industrial Regional Activity and Energy Demand Model (INRAD), was developed to predict how energy use will be influenced by energy prices and the general level of economic activity. INRAD was developed to model energy consumption of fossil fuels and electricity for seven energy-intensive industries and an eighth "other" category with aggregates the non-energy-intensive industries. Two modifications to INRAD were made for use in EGAS. First, additional industrial categories were modeled. Second, INRAD was modified to estimate fossil fuel consumption by fuel type. With the modifications, INRAD can estimate coal, oil, gas, and electricity consumption for the following sectors: food, textiles, upstream paper products, downstream paper products, upstream chemicals, downstream chemicals, glass, glass products, and metals. Inputs to INRAD include State-level forecasts of fuel prices and REMI forecasts of the relative costs of capital, labor, and materials at the sub-State level.

Physical Output Module

The physical output module estimates physical output from value added data generated by the REMI models. Industrial VOC sources were ranked by their contributions to industrial VOC emissions and equations were developed for the largest VOC sources. These equations relate changes in physical output by three-digit SIC categories (as identified by BLS code) with changes in value added and a time trend to capture technological change. These equations provide better estimates of VOC-producing activity than value added alone because they estimate change in actual material output, which is related to the use of VOC producing materials, such as surface coatings and degreasers. For industrial VOC categories for which equations were not developed, activity levels are forecast using value added forecasts from the REMI models.

Electricity Generation Model

Electricity generation by electric utilities is forecast by the Neural Network Electric Utility Model (NUMOD). NUMOD is a behavioral model that uses three embedded neural networks to calculate annual generation activity indices and annual generation resulting from combustion of coal, oil, and natural gas in each of the 48 contiguous states. Although NUMOD forecasts state aggregate generation, it assumes that states are grouped into power pools. It also assumes that generation needed to meet demand in any state may be partially located in other states in the power pool. In contrast to traditional electric utility models, NUMOD used artificial intelligence to learn to relate the amount of electricity generated from data describing generation capacity, climate, peak loads, fuel

prices, and power pool effects. The model operates by reading input records, each of which describes one state for one year. Each record is independent of every other record, allowing NUMOD to run any number of scenarios during a single model run.

The Crosswalk

The Crosswalk is the final component of the EGAS system. The Crosswalk translated growth factors from the energy and physical output modules into growth by SCC. The growth factors from the industrial energy and physical output modules are desegregated to the two-, three-, and sometimes four-digit SIC level, while growth factors from the electric utility model can be desegregated to the plant or county level by type of fuel consumption. The commercial and residential sector energy models desegregate consumption by fuel type only. The Crosswalk was developed by individually matching each of the approximately 7000 SCCs with the appropriate growth factor from the modules. This allows different growth factors to be applied to different emission sources from the same industrial category. For example, forecasts of fuel consumption in upstream chemical manufacturing are developed by INRAD, while forecasts of physical output of upstream chemical products are developed in the physical output module. This methodology takes into account that future emissions associated with a SIC code will vary by type of emission. This is consistent with the SCC system of clarification that differentiates according to not only industrial category, but also to processes within that category.

4.2.1 NO_x POINT SOURCE GROWTH

EGAS will be used to project the AIRS point source inventories that are housed in the AIRS Facility Subsystem (AIRS/FS). These projected inventories will be used in photochemical grid modeling and RFP inventories. Because the AIRS/FS inventories will be projected on a source-specific basis, the user will be able to choose each growth factor. For example, if a user has information from permits or plant surveys about the expected growth of a point source, the user may use that information to predict future growth of that source within EGAS. The ability of the user to override default growth factors may be most important for electric utilities, which are permitted sources and are major emitters of oxides of nitrogen. EGAS produces default growth factors for commercial and industrial energy consumption, fuel consumption by electric utilities, and physical output by Bureau of Labor Statistics code, which represent groups of three- and four-digit SICs. These growth factors are then translated, via the EGAS CROSSWALK, into default growth factors by SCC. Because there is no direct linkage between EGAS and AIRS, users may alter the EGAS growth factor based on information that they have on specific emission sources.

EGAS uses the following information for projecting point source growth:

- ❖ Value added estimates for 210 non-farm industrial categories;
- ❖ Physical output estimates for 210 some major VOC-emitting sources; and
- ❖ Estimates of fuel consumption by type of fuel for the commercial, industrial, and electric utility sectors.

4.2.2 NONROAD GROWTH

Until the EPA develops its computer model for determining nonroad emissions, EGAS growth factors will also be used to determine future emissions from these sources.

The full text of the EPA guidance on projection of emissions from nonroad sources may be found in an EPA memo entitled "Guidance on Projection of Nonroad Inventories to Future Years", dated February 4, 1994. This guidance builds on a previously released report and subsequent development of nonroad inventories for use in 33 ozone and/or carbon monoxide nonattainment areas. These inventories were estimated as a product of equipment population, activity rates and emission factors.

EPA guidance recommends that states use one of the following five alternative methodologies to project nonroad inventories:

1. Project the original or state-modified (A+B)/2 inventory for 1990 to future years by projecting the indicator variables used to estimate the population and activity level of each engine-equipment type within the current A inventory.
2. Develop surrogates for the indicator variable(s) used to develop equipment population estimates for inventory A and use projections of the surrogate variables to project the indicator variables required under the first approach.
3. Project the 1990 inventory by multiplying 1990 emissions by the ratio of future to 1990 human population within the same nonattainment area.
4. Projecting emissions by multiplying 1990 emissions by the growth factors developed for EGAS
5. Project the 1990 inventory by using other projected data on equipment populations and activity levels specific to the nonattainment area in question in conjunction with EPA-provided in-use emission factors.

The Department has chosen option number four to project growth in emissions from nonroad sources.

Within EGAS, the surrogate indicators for nonroad sources are value added or population as identified in the table below.

Table 4.1: EGAS Surrogate Indicators for Projecting Growth in Nonroad Sources

Source Category	Relevant EGAS Growth Factors
Agricultural Equipment	Value Added: Farm
Aircraft	Value Added: Air Transportation
Airport Service Equipment	Value Added: Air Transportation
Commercial Marine	Value Added: Water Transportation

Construction Equipment	Value Added: Construction
Industrial Equipment	Value Added: Durable & Nondurable Mfg.
Lawn & Garden Equipment	Population
Light Commercial Equipment	Value Added: Retail, Wholesale, Services
Logging Equipment	Value Added: Logging
Military Vessels	Total Government
Railroads	Value Added: Railroad Transportation
Recreational Equipment	Population
Recreational Marine	Population

While these indicators appear to be the most appropriate considering the general application of EGAS, other area-specific factors may influence growth in these nonroad categories. For example, water surface area constraints may affect growth in marine vessel use, and population density and climatic conditions may affect emissions from lawn and garden equipment.

4.3 GROWTH FACTOR METHODOLOGY – MOBILE SOURCE GROWTH

Available data allows the onroad mobile source 1990 base year inventory to be projected to the attainment year of 2005 by transportation modeling techniques. The transportation model is run using the current vehicle fleet on the 2005 planned highway network. Appropriate population, household and employment growth are input through forecasting techniques. After projection of the uncontrolled emissions, pre-1990 CAAA controls are added and the emissions with this level of control becomes the projected mobile inventory.

4.4 ASSUMPTIONS MADE IN CALCULATING GROWTH

The following section will summarize the basic assumptions applied in the construction of the projected emissions inventory. The issues involved include the use of actual versus allowable emissions in deriving the milestone emissions for each source category, and rule effectiveness and rule penetration assumptions.

4.4.1 USE OF BEA METHODOLOGY VS. USE OF EGAS METHODOLOGY

In projecting emission estimates the Department used the two methodologies described above, BEA and EGAS growth factors. The selection between these two methodologies was done based upon guidance from the EPA and through the analysis of both factors to each source category.

The EPA recommends the use of EGAS growth factors for the projection of nonroad emissions and NOx emissions from point sources. In addition, the Department analyzed these methodologies for NOx point sources. An analysis was developed for the projected estimates between EGAS and BEA growth factors. For example, EGAS uses a fossil fuel model, which the Department feels projects realistically the use of fossil fuels for the Baltimore nonattainment area. This is important since fossil fuel-use by sources, such as utilities, are the major components of the point source emissions for

NO_x.

As recommended by the EPA, BEA growth factors were used for area sources and point source emissions of VOC. An analysis was also developed for these source categories using both methodologies. For the area source category, commercial and consumer products and new motor vehicle refinishing were projected by EGAS to decrease over the next ten years due to a population decrease in the Baltimore nonattainment area. This contradicts industry projections and the expectations of the Department.

In using the EGAS system, specific settings were chosen to run the model. The first setting was in the national tier, where the Department chose the BLS model over the WEFA model. Time constraints did not allow for a through comparison of the two models. In the regional tier, no policy changes were enacted, and the default settings for the Maryland Region were used. This was again due to time constraints and may be studied in the future.

4.4.2 ACTUAL VS. ALLOWABLE EMISSIONS IN THE CONSTRUCTION OF THE PROJECTED EMISSIONS INVENTORY

For the purposes of calculating projection emissions inventories, EPA guidance specifically outlines the circumstances under which emissions projections are to be based on actual or allowable emissions. For sources or source categories that are currently subject to a regulation and the state does not anticipate subjecting the source to additional regulation, emissions projections should be based on actual emissions levels. Actual emissions levels should also be used to project for sources or source categories that are currently unregulated. For sources that are expected to be subject to additional regulation, projections should be based on new allowable emissions.

To simplify comparisons between the base year and the projected year, EPA guidance states that comparison should be made only between like emissions: actual to actual, or allowable to allowable, not actual to allowable. At this time, the Department does not have data to calculate allowable emissions for all sources that will be controlled in the future. Therefore, all base year and all projection year emissions estimates are based on actual emissions.

Formally, the distinction between "actual emissions" and "allowable emissions" is drawn under Title 26.11.01.01 of Maryland air quality regulations (COMAR, 1993). The term "actual emissions" means the average rate, in tons per year, at which a source discharged a pollutant during a 2-year period which preceded the date or other specified date, and which is representative of normal source operation. Actual emissions are calculated using the sources operating hours, production rates, and types of material processed, stored, or burned during the selected time period.

"Allowable emissions" are defined as "the maximum emissions a source or installation is capable of discharging after consideration of any physical, operations, or emissions limitations required by Maryland regulations or by federally enforceable conditions which restrict operations and which are included in an applicable air quality permit to construct or permit to operate, secretarial order, plan for compliance, consent agreement, court order, or applicable federal requirement".

4.4.3 EFFECT OF RULE EFFECTIVENESS

For the purposes of constructing the 1990 base year inventory, rule effectiveness was calculated using the EPA 80% default factor except for gasoline marketing where a Stationary Source Compliance Division study was done. Rule effectiveness was applied to the projected emissions reductions where appropriate using both the 80% default factor and state-specific factors where available.

4.5 PROJECTION INVENTORY RESULTS

The VOC and NOx projection year emission inventory results are summarized by component of the inventory in Table 4.2 for the Baltimore nonattainment area. The area and nonroad categories are projected with no controls applied. The 1990-point source emissions as controlled in 1990 were projected to the milestone years. The 1990 mobile source emissions are projected to the milestone years and pre-1990 CAAA controls are applied to produce the projected mobile inventory.

Table 4.2: Projection Year Emission Inventory Results for the Baltimore Nonattainment Area

Source	VOC Emissions (tpd)					NOx Emissions (tpd)				
	1990	1996	1999	2002	2005	1990	1996	1999	2002	2005
Mobile	165.10	99.50	96.30	86.40	91.80	228.20	228.00	227.80	214.30	199.80
Point	42.00	44.58	48.10	51.40	54.20	223.20	230.54	240.60	247.50	251.90
Area	122.40	126.64	128.70	130.50	132.20	13.70	14.48	14.80	15.10	15.40
Nonroad	44.70	48.52	50.90	53.37	55.76	71.50	79.50	82.00	86.65	91.84
Total	374.20	319.25	324.00	321.67	333.96	536.60	552.52	565.20	563.55	558.94

Area and Offroad Projections

Category	Indicator	VOC	VOC	VOC	VOC	VOC	NOx	NOx	NOx	NOx	NOx
		1990	1996	1999	2002	2005	1990	1996	1999	2002	2005
Service Station Refueling	GAS	13.200	14.124	14.560	15.035	15.510	0.000	0.000	0.000	0.000	0.000
Tank Truck Unloading	GAS	0.800	0.856	0.882	0.911	0.940	0.000	0.000	0.000	0.000	0.000
Tank Breathing	GAS	1.050	1.124	1.158	1.196	1.234	0.000	0.000	0.000	0.000	0.000
Tank Trucks in Transit	GAS	0.180	0.193	0.199	0.205	0.212	0.000	0.000	0.000	0.000	0.000
Aircraft Refueling	EMP	0.410	0.516	0.561	0.597	0.627	0.000	0.000	0.000	0.000	0.000
Pet. Vessel Unloading	EMP	0.040	0.037	0.036	0.035	0.034	0.000	0.000	0.000	0.000	0.000
Cold Cleaning Degreasing	EMP	10.420	10.363	10.346	10.319	10.286	0.000	0.000	0.000	0.000	0.000
Architectural Surface Coatings	POP	19.230	20.363	20.828	21.263	21.684	0.000	0.000	0.000	0.000	0.000
Auto Refinishing	EMP	10.390	11.824	12.460	12.981	13.446	0.000	0.000	0.000	0.000	0.000
Graphic Arts	EMP	4.496	4.909	5.095	5.241	5.367	0.000	0.000	0.000	0.000	0.000
Pesticide Application	NONE	6.410	6.410	6.410	6.410	6.410	0.000	0.000	0.000	0.000	0.000
Commercial/Consumer Solvents	POP	20.260	21.454	21.943	22.402	22.845	0.000	0.000	0.000	0.000	0.000
Cutback Asphalt	POP	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
Emulsified Asphalt	POP	0.024	0.025	0.026	0.027	0.027	0.000	0.000	0.000	0.000	0.000
Traffic Marking	POP	0.610	0.646	0.661	0.674	0.688	0.000	0.000	0.000	0.000	0.000
Factory Finished Wood	EMP	0.320	0.322	0.328	0.330	0.328	0.000	0.000	0.000	0.000	0.000
Furniture and Fixtures	EMP	3.450	3.471	3.534	3.555	3.555	0.000	0.000	0.000	0.000	0.000
Electrical Insulation	EMP	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
Metal Cans	EMP	3.696	3.205	3.042	2.893	2.750	0.000	0.000	0.000	0.000	0.000
Misc. Finished Metals	EMP	0.710	0.710	0.710	0.704	0.696	0.000	0.000	0.000	0.000	0.000
Machinery and Equipment	EMP	1.152	1.152	1.152	1.150	1.146	0.000	0.000	0.000	0.000	0.000
Appliances	EMP	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
New Motor Vehicles	EMP	1.780	1.747	1.726	1.704	1.683	0.000	0.000	0.000	0.000	0.000
Other Transportation Equipment	EMP	0.264	0.271	0.274	0.276	0.278	0.000	0.000	0.000	0.000	0.000
Marine Coatings	EMP	1.208	1.239	1.253	1.263	1.270	0.000	0.000	0.000	0.000	0.000
Misc. Manufacturing	EMP	2.715	2.715	2.715	2.715	2.715	0.000	0.000	0.000	0.000	0.000
Industrial Maintenance Ctgs.	EMP	3.617	3.137	2.977	2.831	2.691	0.000	0.000	0.000	0.000	0.000
Other Coatings	EMP	3.617	3.137	2.977	2.831	2.691	0.000	0.000	0.000	0.000	0.000
Municipal Landfills	POP	2.510	2.658	2.719	2.775	2.830	0.000	0.000	0.000	0.000	0.000
Incinerators	POP	0.036	0.038	0.039	0.040	0.041	0.260	0.275	0.282	0.287	0.293
POTWs	HHS	2.520	2.668	2.729	2.786	2.842	0.000	0.000	0.000	0.000	0.000
Structure Fires	POP	0.050	0.053	0.054	0.055	0.056	0.000	0.000	0.000	0.000	0.000
Slash/Prescribed Burning	NONE	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
Forest Fires	NONE	0.020	0.020	0.020	0.020	0.020	0.000	0.000	0.000	0.000	0.000
Open Burning	NONE	3.640	3.640	3.640	3.640	3.640	0.760	0.760	0.760	0.760	0.760
Leaking U.S.T.	NONE	3.360	3.360	3.360	3.360	3.360	0.000	0.000	0.000	0.000	0.000
R/C/I Fuel Use - Coal	POP	0.054	0.057	0.058	0.060	0.061	4.832	5.117	5.234	5.343	5.449
R/C/I Fuel Use - Fuel Oil	POP	0.074	0.078	0.080	0.081	0.083	4.415	4.675	4.782	4.882	4.978
R/C/I Fuel Use - Natural Gas	POP	0.114	0.121	0.123	0.126	0.129	3.199	3.387	3.465	3.537	3.607
R/C/I Fuel Use - LPG	POP	0.002	0.002	0.002	0.002	0.002	0.252	0.267	0.273	0.278	0.284
Bakeries	EMP	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
Breweries	EMP	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
Wineries	EMP	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
Oil Spills	POP	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
Biogenic*	NONE	180.090	180.090	180.090	180.090	180.090	0.000	0.000	0.000	0.000	0.000
Total		122.428	126.643	128.677	130.492	132.175	13.718	14.481	14.795	15.088	15.371

Category	Indicator	VOC	VOC	VOC	VOC	VOC	NOx	NOx	NOx	NOx	NOx
		1990	1996	1999	2002	2005	1990	1996	1999	2002	2005
Recreational Equipment	EGAS	0.860	0.931	0.974	1.014	1.042	0.000	0.000	0.000	0.000	0.000
Construction Equipment	EGAS	5.480	6.175	6.598	7.062	7.561	37.040	41.740	44.596	47.711	51.115
Industrial Equipment	EGAS	1.770	1.883	2.100	2.260	2.426	3.680	3.916	4.368	4.687	5.045
Light Commercial Equipment	EGAS	3.800	4.261	4.621	5.015	5.449	0.510	0.572	0.616	0.674	0.731
Lawn & Garden Equipment	EGAS	17.680	19.236	20.028	20.756	21.423	0.290	0.316	0.329	0.340	0.351
Farm Equipment	NONE	1.720	1.720	1.720	1.720	1.720	7.870	9.887	7.870	7.870	7.870
Logging Equipment	EGAS	0.330	0.349	0.374	0.398	0.433	0.000	0.000	0.000	0.000	0.000
Aircraft Support	EGAS	0.880	1.001	1.124	1.251	1.408	5.380	6.119	6.847	7.650	8.574
Commercial Aviation	EGAS	0.490	0.581	0.624	0.728	0.781	1.440	1.638	1.836	2.054	2.295
General Aviation	EGAS	0.140	0.166	0.178	0.208	0.223	0.010	0.011	0.013	0.014	0.016
Air Taxis	EGAS	0.080	0.095	0.102	0.119	0.128	0.010	0.011	0.013	0.014	0.016
Military Aviation	NONE	2.810	2.810	2.810	2.810	2.810	0.980	0.980	0.980	0.980	0.980
Vessels	EGAS	0.410	0.449	0.479	0.510	0.544	2.780	3.045	3.250	3.460	3.689
Pleasure Boats	EGAS	7.710	8.391	8.734	9.048	9.342	0.920	1.001	1.050	1.080	1.120
Railroads	EGAS	0.490	0.475	0.475	0.470	0.469	10.580	10.263	10.189	10.113	10.040
Total		44.650	48.524	50.941	53.370	55.759	71.490	79.499	81.956	86.648	91.844

5.0 CALCULATING THE VOC EMISSION TARGET LEVELS FOR THE POST-1996 MILESTONE YEARS

To determine the amount of emissions reductions required after the year 1996, the Department must calculate the target level for VOC emissions at each milestone year for the Baltimore nonattainment area. The target level is the maximum amount of VOC emissions that can be emitted to comply with the Act's requirements. Table 5.1 demonstrates the target level of VOC emissions at each milestone year for the Baltimore nonattainment area. A discussion on how the target level is calculated is discussed in Section 5.2. These target levels have been recalculated based on MOBILE6 modeling. The target levels represent the same proportion of VOC and NOx used to meet the rate of progress requirement with MOBILE5b estimates.

Table 5.1: Baltimore Area Emission Target Levels for Post-1996 Milestone Years

Milestone	VOC Emissions	NOx Emissions
1996	242.155	NA
1999	241.73	444.17
2002	227.55	398.57
2005	221.53	345.49

5.1 NOx SUBSTITUTION

If a nonattainment area cannot meet the VOC emission target level, Section 182(c)(2)(C) of the Act allows for the substitution of actual NOx emission reductions which occur after 1990 to meet the VOC emission target level. This may be done provided that such reductions meet the criteria outlined in the EPA's December 15, 1993 NOx Substitution Guidance (Appendix G).

One of the conditions for meeting the VOC emission target level using NOx substitution is that the sum of all creditable VOC and NOx emission reductions must equal 3 percent per year averaged over each applicable milestone period. In other words, any combination of VOC and NOx emission reductions that totals 3% per year will satisfy these criteria.

The following equation generally describes the method to calculate the total 3% per year emission reductions:

$$R_V/\text{VOC}(\text{Adj.}) + R_N/\text{NO}_x(\text{Adj.}) \geq 0.03$$

where:

RV = typical summer day VOC reductions

RN = typical summer day NOx reductions

VOC(Adj.) = human-made 1990 adjusted VOC emissions inventory, and

$NO_x(\text{Adj.}) = \text{human-made 1990 adjusted } NO_x \text{ emissions inventory.}$

The values of R_V and R_N include only the creditable emission reductions from the nonattainment area of concern. For instance, VOC and NO_x reductions from automobile tailpipe and gasoline volatility standards adopted prior to the Act's amendments of 1990 are excluded from these values. The Act specifically excludes these as programs that may be not credited toward Rate-of Progress.

The values of VOC (Adj.) and NO_x (Adj.) include the 1990 adjusted emissions inventories. These values are equal to the 1990 man-made base year inventory minus reductions from the pre-enactment automobile tailpipe and gasoline volatility standards.

The second condition for using NO_x substitution requires the amount of NO_x emission reductions used to meet the *Post-1996 RPP* be consistent with the amount of NO_x emission reductions mandated by the urban airshed model. The urban airshed model determines the amount of reductions necessary to bring an area into attainment with the ozone standard. Therefore, the reductions required by the model must be met in addition to those required by the RPPs. However, due to the chemical reactions the maximum amount of NO_x reductions required is that dictated by the model. NO_x reductions have the potential of increasing ozone. In conclusion, when using NO_x substitution to meet the RPP requirements the amount of NO_x reductions is capped to the amount required by the model.

In order to use NO_x substitution, separate target levels of emission have to be calculated for both NO_x and VOC. The EPA developed an approach where a target level for VOC and NO_x emissions is determined. Detailed calculations and flowcharts of the VOC and NO_x target levels following the EPA's guidance are included below.

5.2 CALCULATION OF THE VOC EMISSION TARGET LEVELS FOR THE POST-1996 TARGET LEVELS

The target level of emissions represents the maximum amount of emissions that a nonattainment area can emit for a given target year while complying with the three percent per year reduction requirements.

Two equations are presented in the General Preamble to describe the calculation of the target levels. These equations can be generalized into the following single equation:

Target level = (previous milestone's target level) - (reductions required to meet the rate-of-progress requirement) - (fleet turnover correction term).

or

$$TL_x = TL_y - BG_x - FT_x$$

where:

TL_x = Target level of emissions for current milestone

TL_y = Target level of emissions for previous milestone

BG_x = Emission reduction requirement for current milestone

FT_x = Fleet turnover correction term for current milestone

This equation can be used to calculate the target level of emissions for each post-1996 milestone year. The target level for each milestone year (TL_x) is obtained by subtracting the 3 percent per year rate-of-progress emission reduction

(BG_x) and the fleet turnover correction term (FT_x) from the previous milestone year (TL_y).

There are six major steps in calculating a post-1996 target level of emissions. The first four steps are needed to calculate the 3 percent per year rate-of-progress emission reductions. Steps 1 and 2, developing the 1990 base year inventory and the 1990 rate-of-progress inventory, were required in the 15 percent rate-of-progress plan.

The 1996-2005 target levels have been revised from those included in the Phase I Plan submittal for the Baltimore area. The target levels are revised to take into account new estimates for mobile emissions.

The new 1996 target levels are the following:


Baltimore Nonattainment Area

CALCULATION OF 15% REDUCTION TARGET		Formula	Baltimore (tpd)
a	1990 Base Year Inventory (Anthropogenic + Biogenic)		554.290
b	Biogenic (Vegetative) Emissions		180.090
c	1990 Rate-of-Progress Base Year Inventory (a) - (b)	(a) - (b)	374.200
d	Reductions from Federal Motor Vehicle Control Program (FMVCP) and Gasoline Volatility Regulations (RVP)		77.900
e	Reductions from Federal Motor Vehicle Control Program (FMVCP) and Gasoline Volatility Regulations (RVP) between 1996-1999		9.700
f	1990 Adjusted Base Year Inventory	(c) - (d)	296.300
g	15 % Reduction Requirement	(0.15) x (f)	44.445
h	Expected Emissions Growth (1990 - 1996)		22.949
i	Total Emissions Reductions Needed	(g) + (h)	67.394
j	1996 Target Level of Emissions	(c) - (g) - (d) - (e)	242.155


The following figures contain the calculation for the 1999, 2002 and 2005 target levels.

5.3 TARGET LEVEL FLOWCHARTS


Flowchart for VOC Target Level for 1999 Milestone Baltimore Nonattainment Area

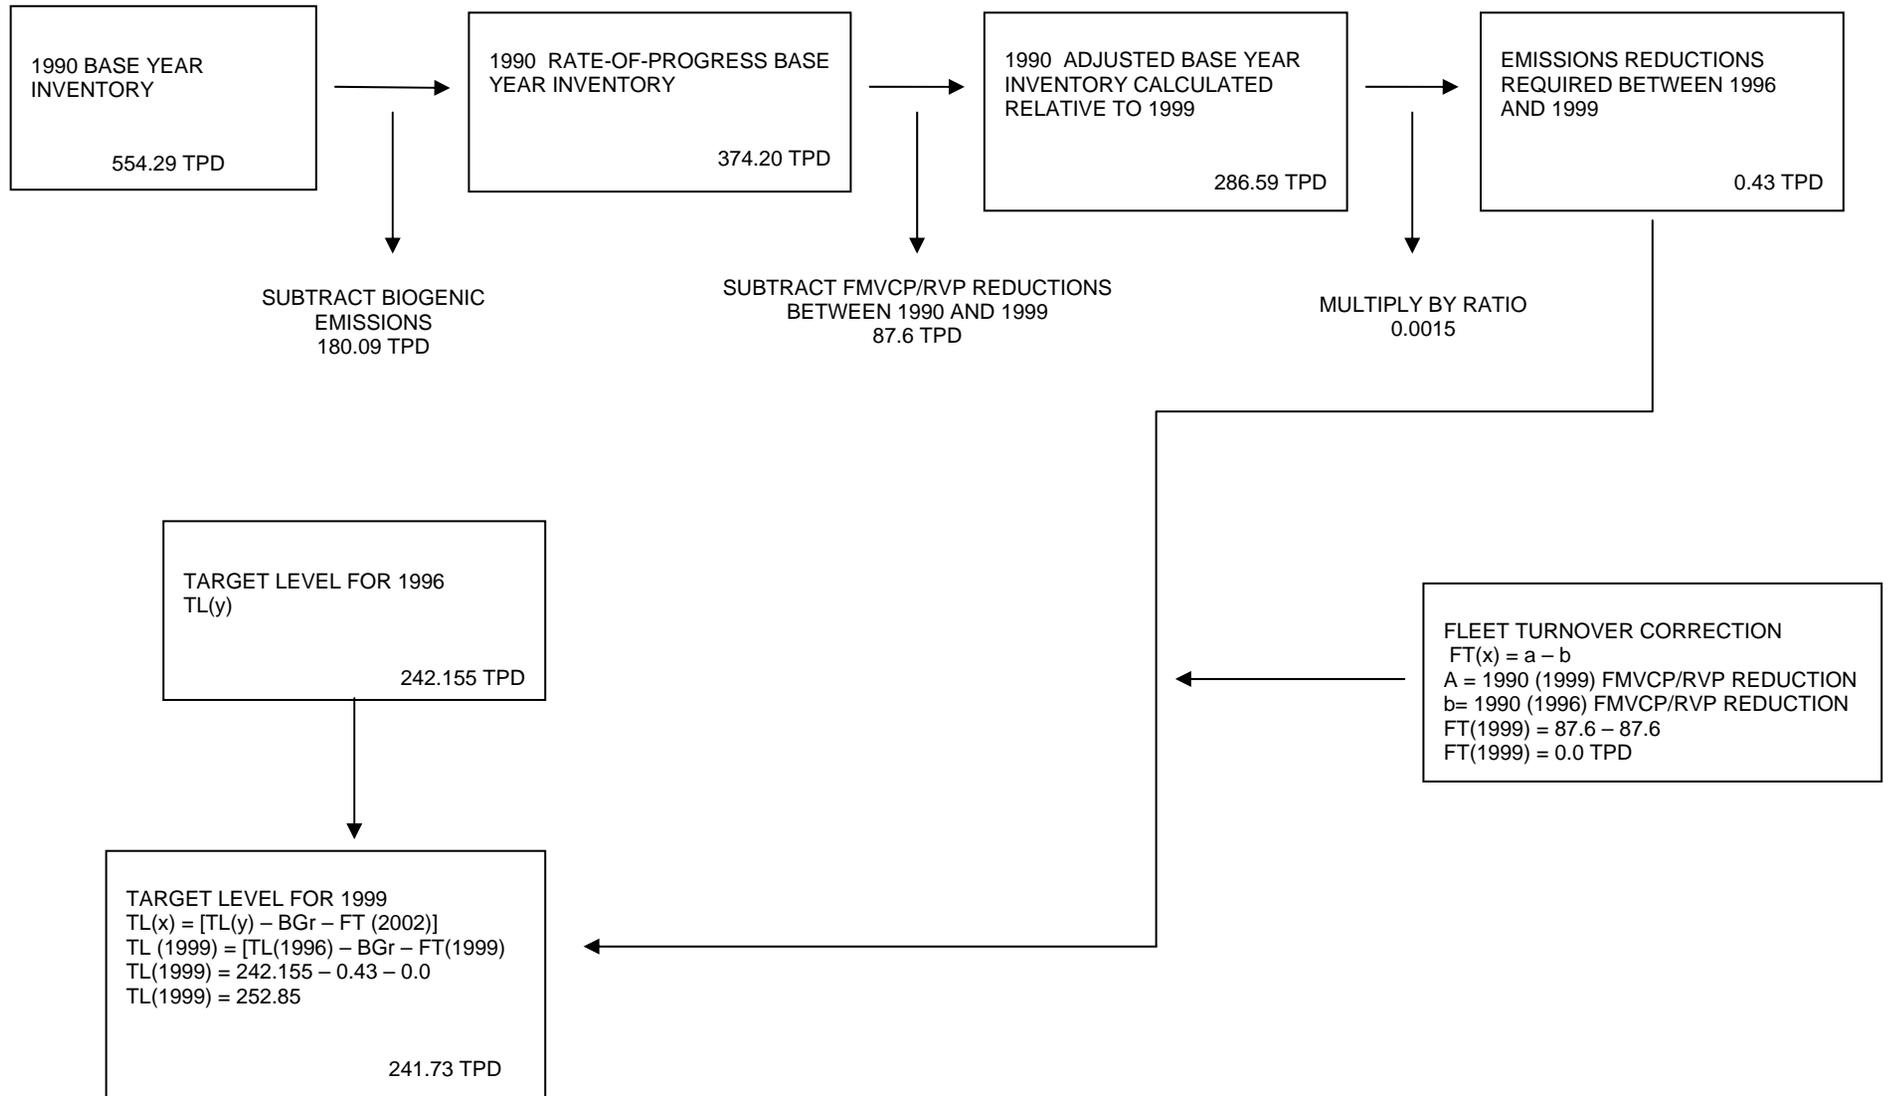


Flowchart for VOC Target Level for 2002 Milestone Baltimore Nonattainment Area

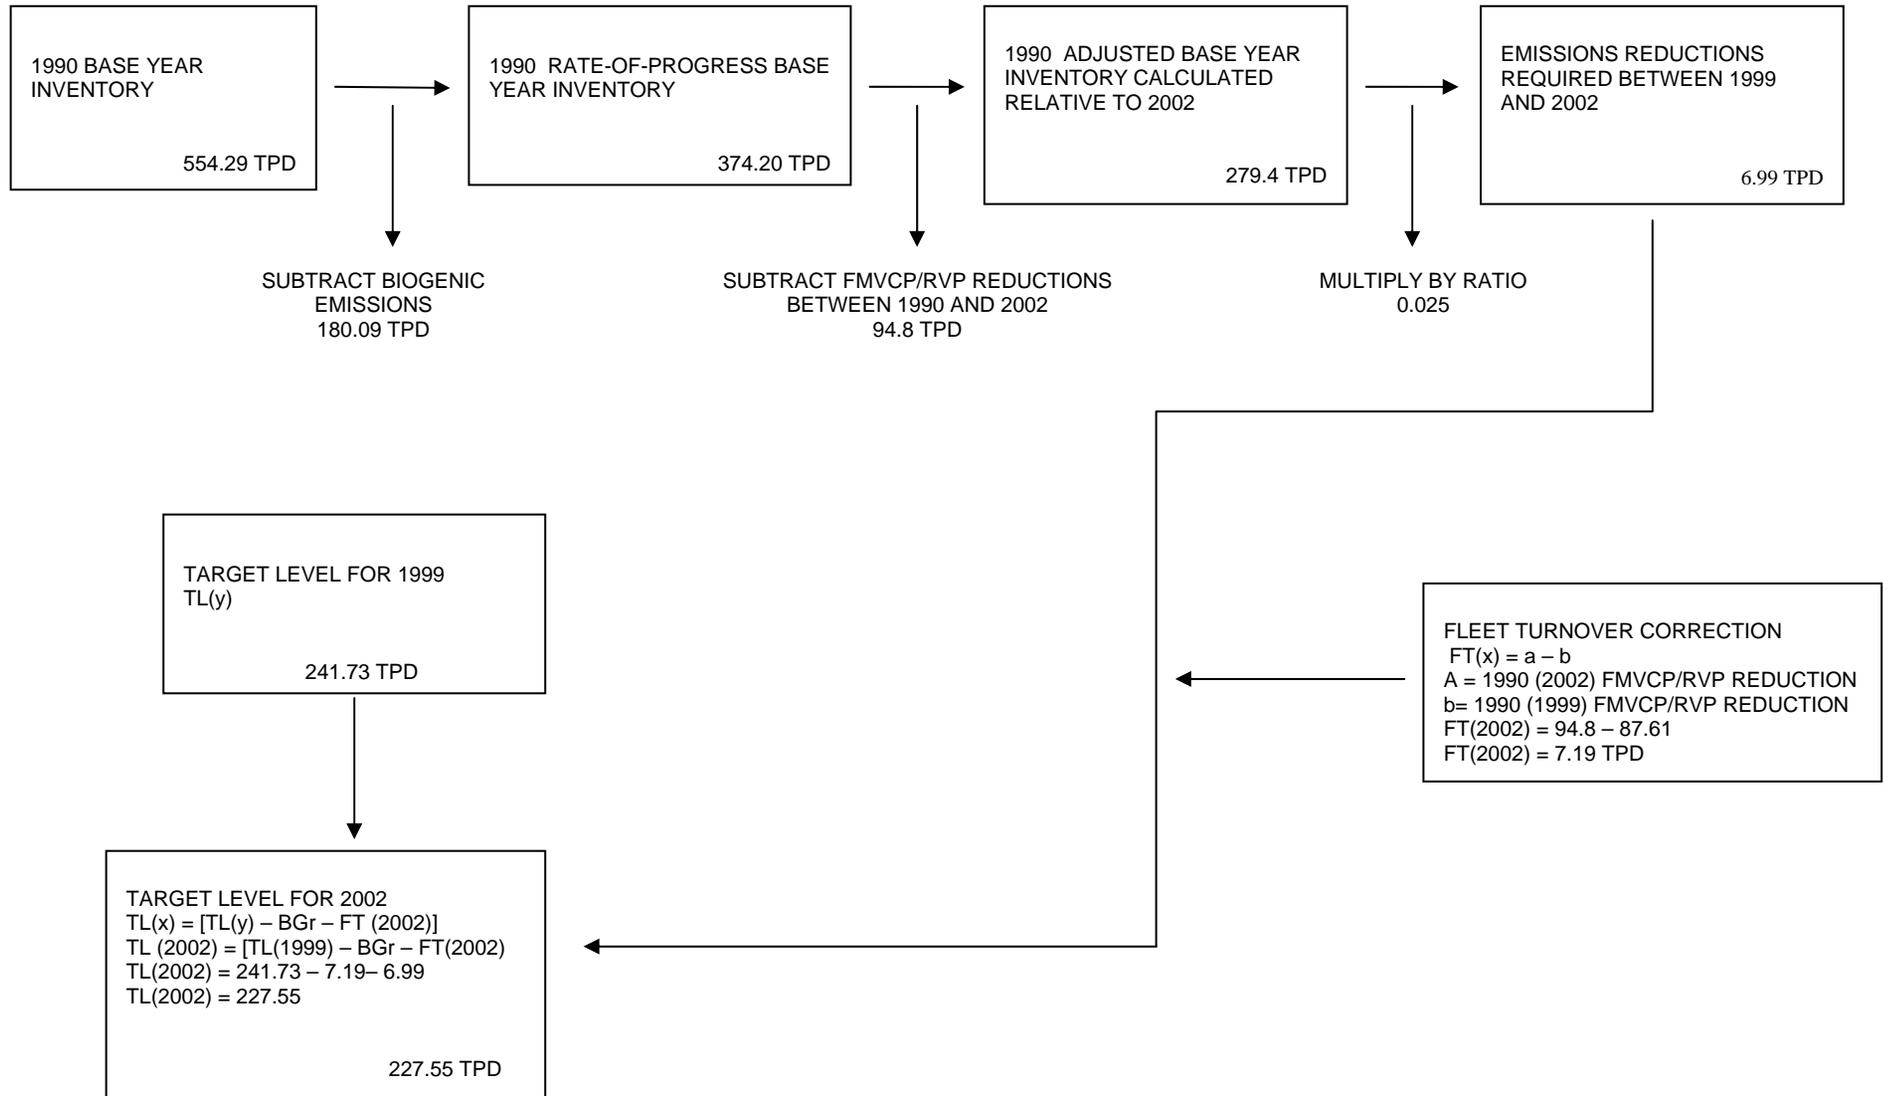


Flowchart for VOC Target Level for 2005 Milestone Baltimore Nonattainment Area

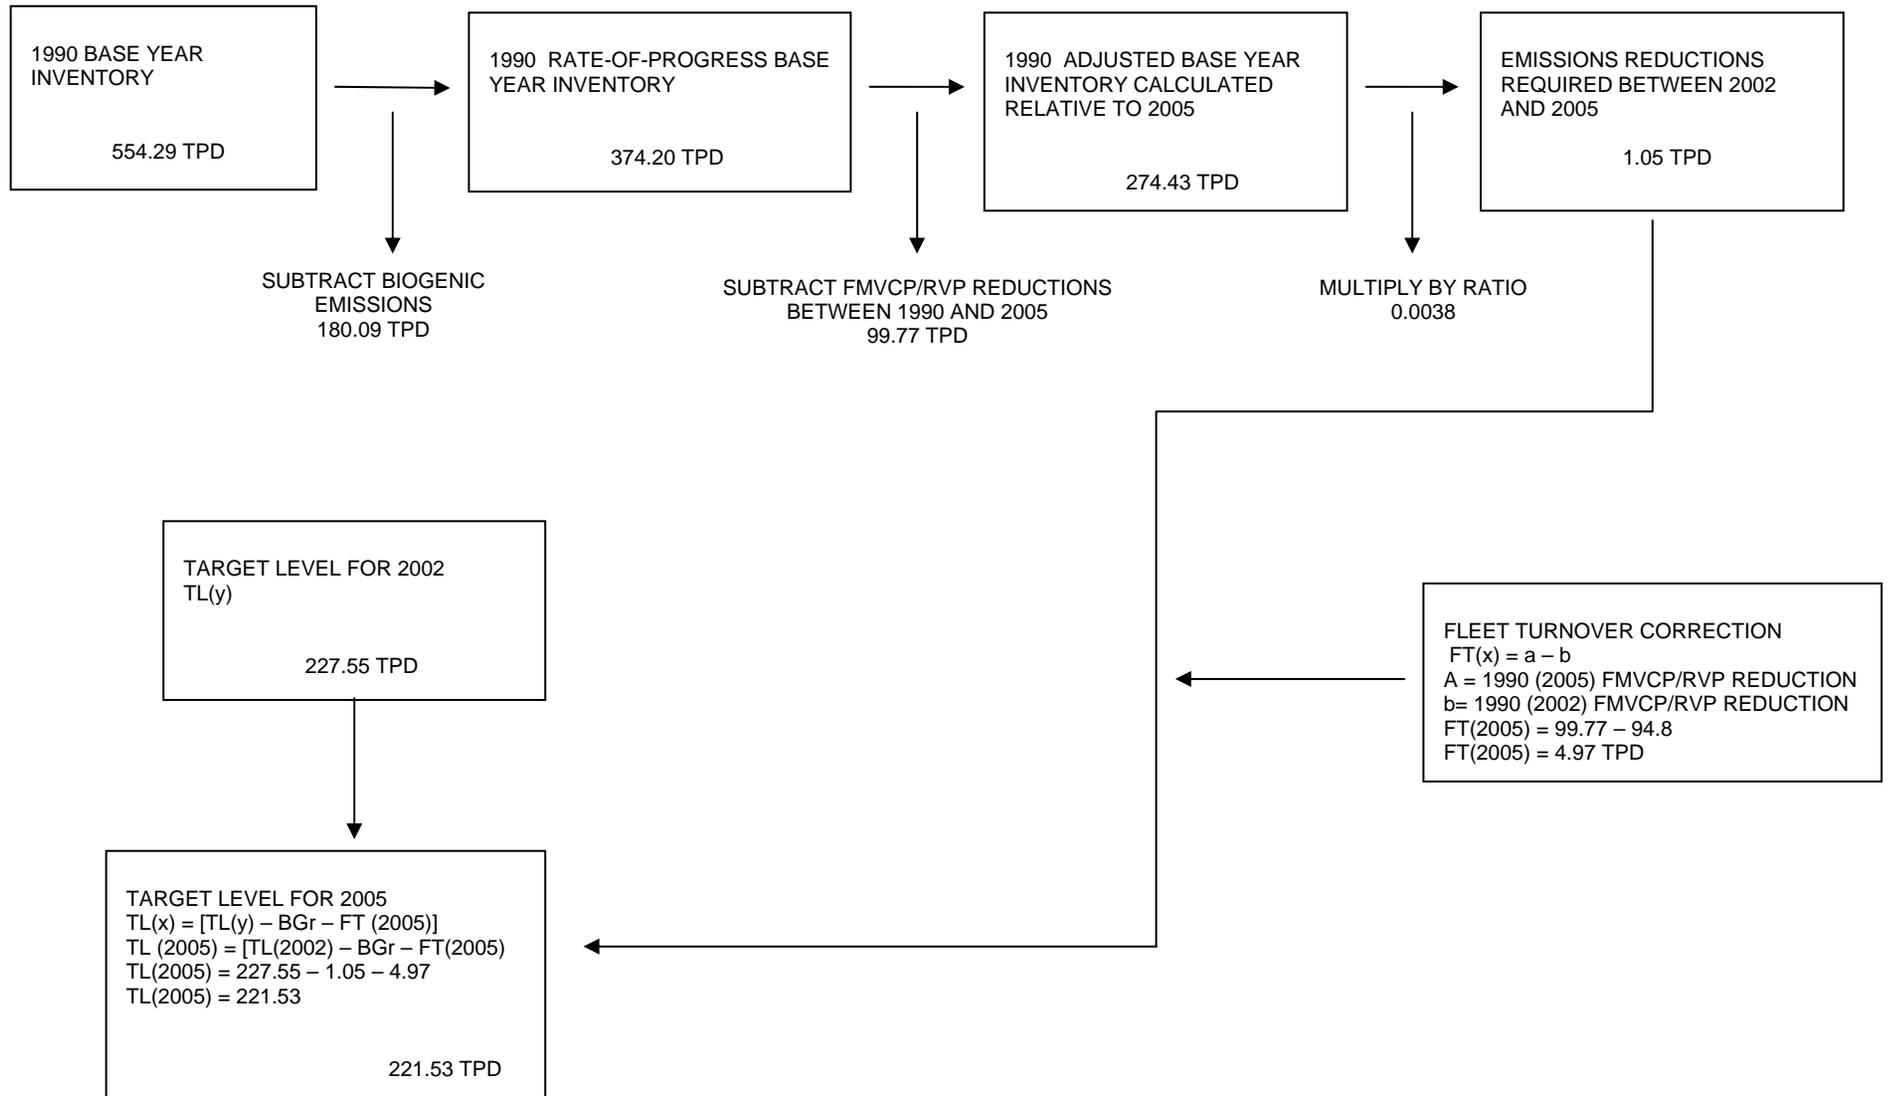


Flowchart for NO_x Target Level for 1999 Milestone Baltimore Nonattainment Area

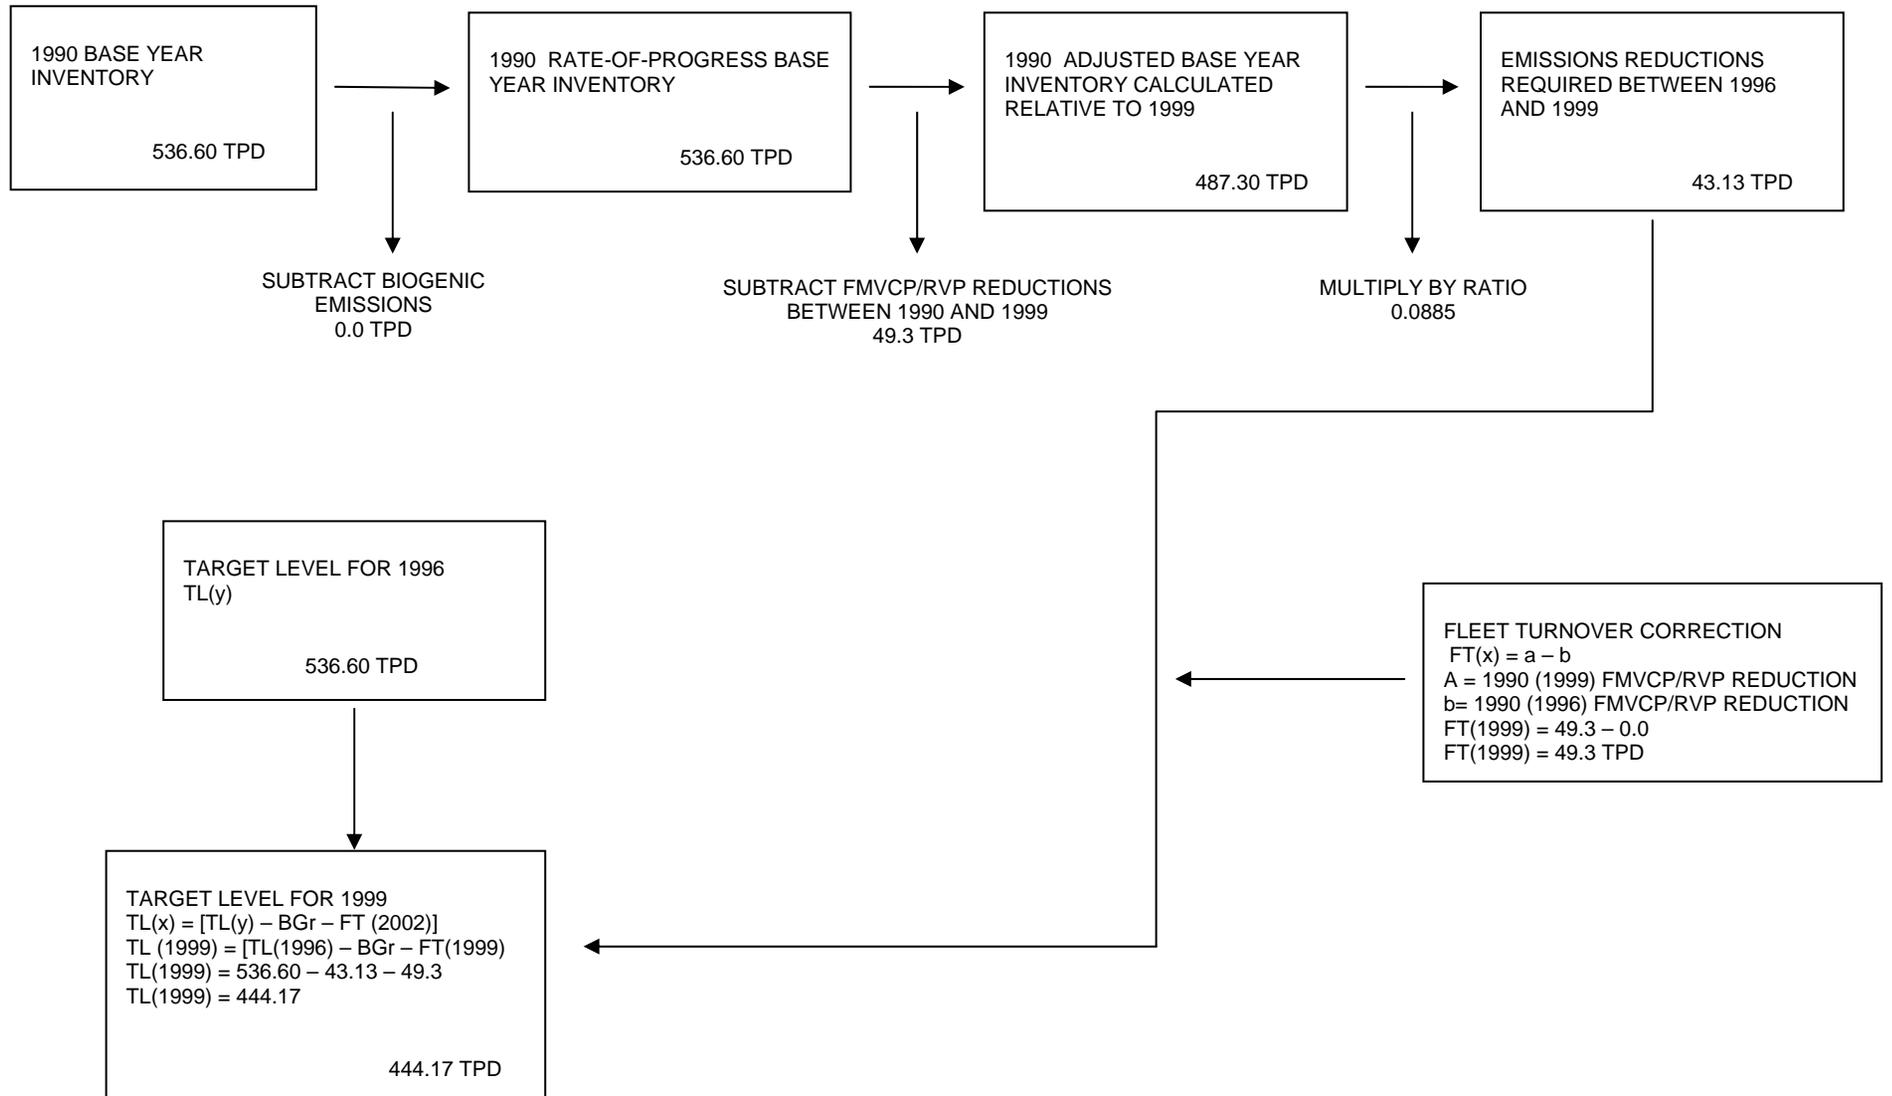

Flowchart for NO_x Target Level for 2002 Milestone Baltimore Nonattainment Area

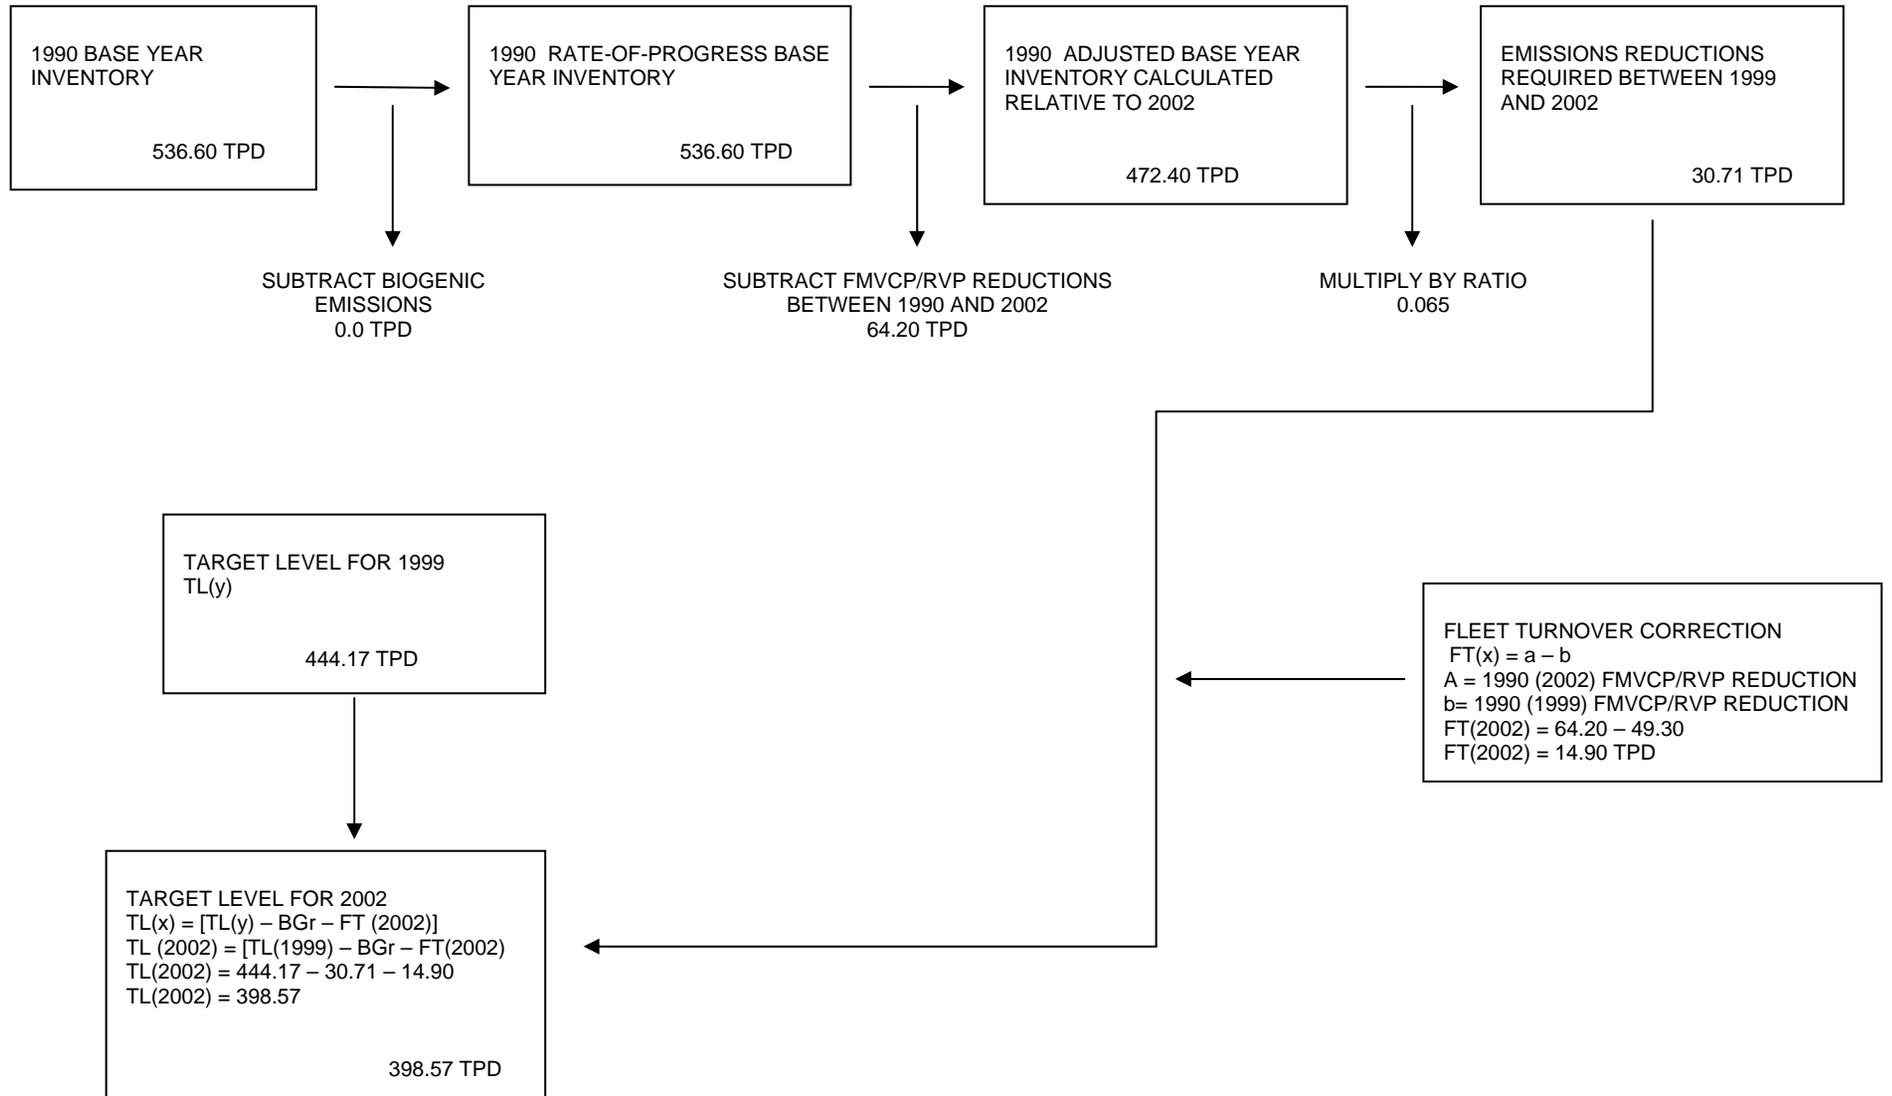

Flowchart for NO_x Target Level for 2005 Milestone Baltimore Nonattainment Area

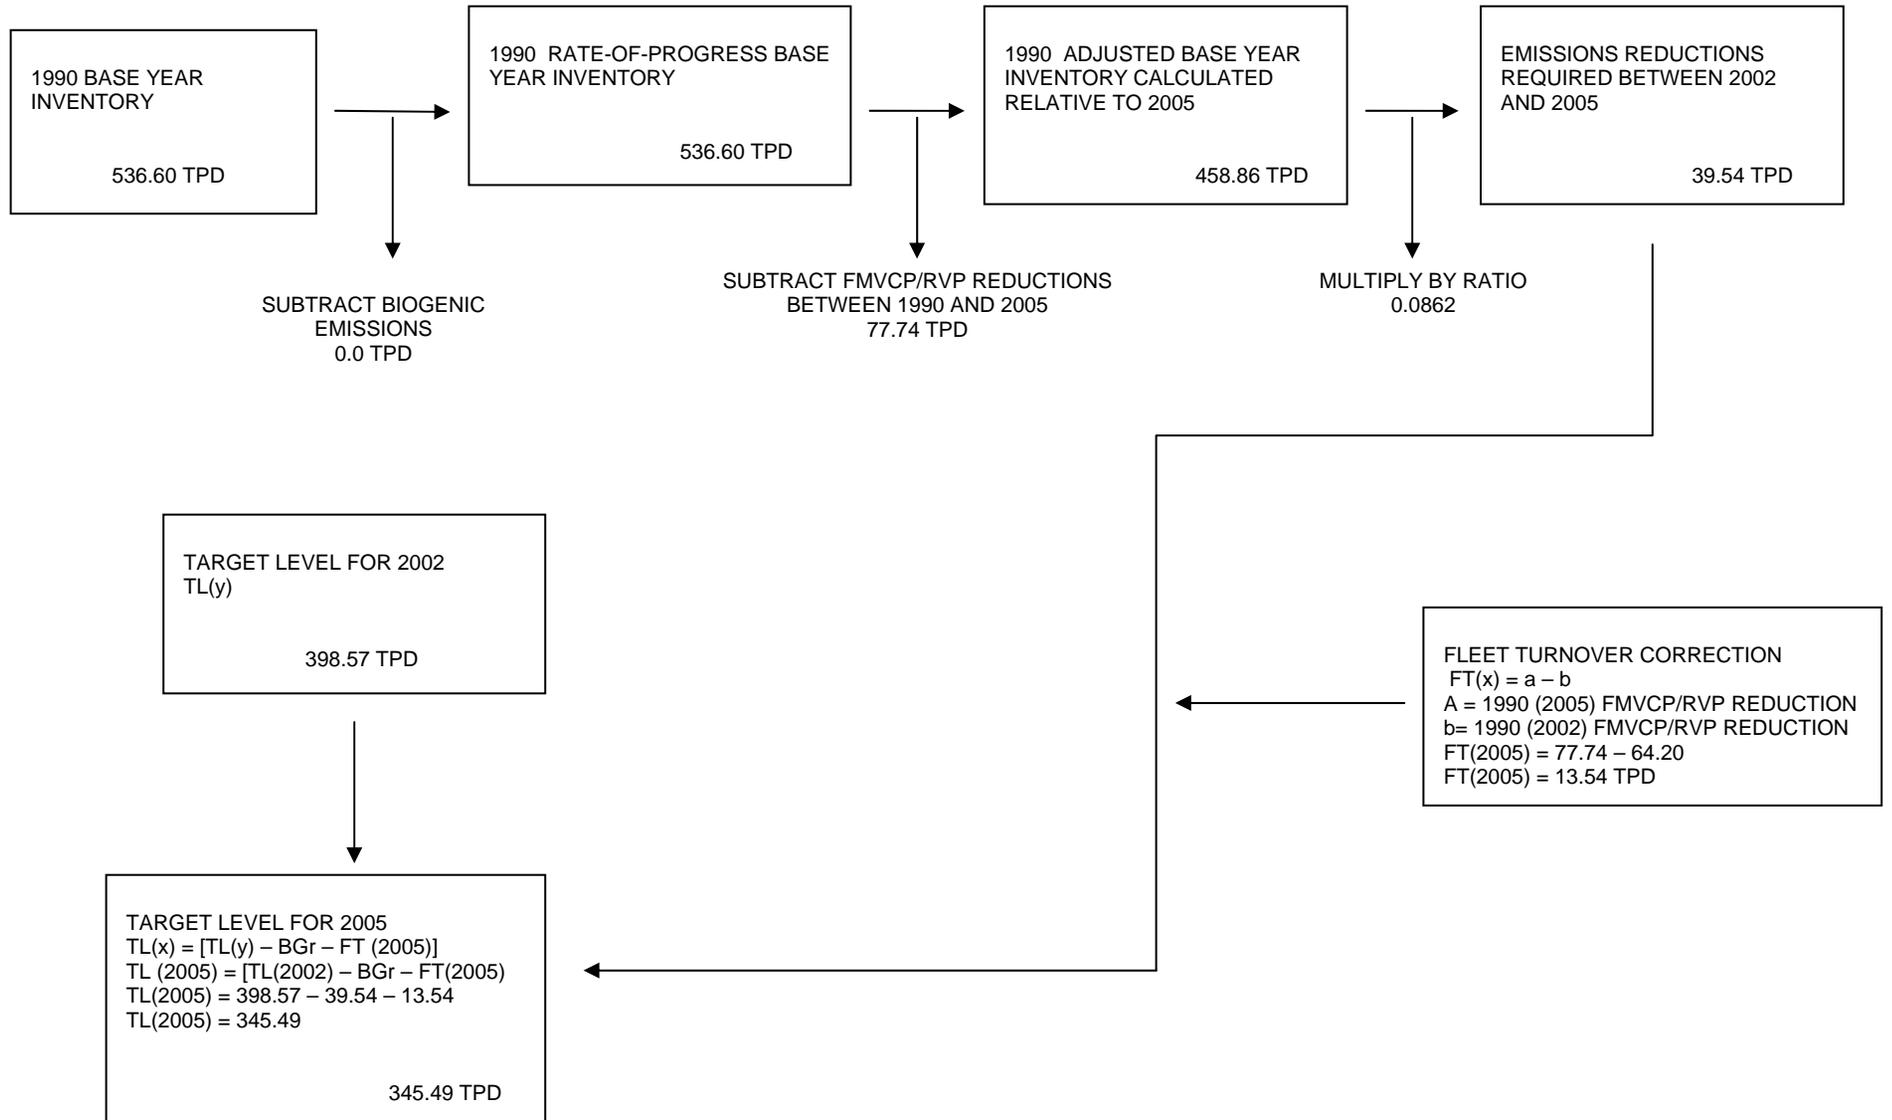

6.0 CONTROL MEASURES TO MEET THE RATE OF PROGRESS REQUIREMENTS

This section briefly summarizes the control measures that account for the emission reductions required to meet the Rate-of-Progress requirements for the 2005 milestone. Table 6.1 demonstrates the summary of emission reductions expected from considering the control measures used to meet the 2005 milestone.

Table 6.1: Summary of Emission Benefits For The Baltimore Area (Tons Per Day)

Control Measure	2005	
	VOC	NO _x
Enhanced I/M Tier I Reform Gas NLEV - TIER 2 - HDDE		
Total Mobile	36.75	55.30
Stage II/Refuel	12.65	0.00
Landfills	0.27	0.00
Open Burning	3.52	0.74
Surface Cleaning/ Degreasing	5.76	0.00
Architectural Coatings	5.55	0.00
Consumer Products	2.83	0.00
Auto Refinishing	8.07	0.00
Nonroad Small Gasoline Engines	17.51	-0.45
Nonroad Diesel Engines Tier I & II	0.00	21.62
Marine Engine Standards	1.79	-0.07
Railroads	0.00	4.20
Expandable Polystyrene	0.10	0.00
Yeast Production	0.87	0.00
Commercial Bakeries	0.72	0.00
Screen Printing	0.20	0.00
Federal Air Toxics	0.50	0.00
Graphic Arts-Lithography	2.66	0.00
Graphic Arts - Rotogravure & Flexographic	0.90	0.00
Enhanced Rule Compliance	5.10	0.00
State Air Toxics	0.96	0.00
NO _x RACT	0.00	5.01
NO _x Phase II / III	0.00	127.60
Nonroad RFG	1.39	0.00
OTC – Consumer Products	3.57	0.00
Large Spark Ignition Engines	0.75	0.54
Total	112.43	214.48
Projected Uncontrolled Emissions	333.96	558.94
Emission Level Obtained	221.53	344.47
Emission Level Required	221.53	345.49

Surplus

| 0.00 |

1.02 |

6.1 On-Road Mobile Measures

The EPA's mobile emissions model, MOBILE6, with locality-specific inputs and appropriate design parameters for Maryland was used to estimate the VOC and NOx emissions reductions obtained from the following mobile source control strategies. Time and resource constraints prohibited the calculation of individual benefits for each mobile source control strategy. A single table totaling the benefits from all the mobile strategies follows the descriptions of the control programs. The specific methodologies and assumptions associated with modeling these programs can be found in the input stream for the model runs used to prepare the 2005 mobile source emissions budget (see Appendix B.)

6.1.1 Enhanced Vehicle Inspection and Maintenance (Enhanced I/M)

This measure involves implementing a vehicle emission inspection and maintenance program with stricter requirements than the "basic" program.

Description of Source Category

This measure affects light duty gasoline vehicles, light duty gasoline trucks and heavy-duty gasoline vehicles up to 26,000 pounds.

Control Strategy

The Act requires enhanced motor vehicle inspection and maintenance (I/M) programs in serious, severe, and extreme ozone nonattainment areas with urbanized populations of 200,000 or more. In Maryland, this required enhanced I/M program impacts the 8 jurisdictions currently operating a basic I/M program as well as 6 new jurisdictions, for a total of 14 of the 23 jurisdictions in the state.

Maryland obtained VOC emissions reductions by adopting regulations for an enhanced vehicle emissions I/M program that contains test procedures that will detect more emissions-related faults, cover a larger geographic area in the state, and allow fewer waivers from emissions standards. Tailpipe emissions will be measured over a transient driving cycle conducted on a dynamometer, which provides a much better indication of actual on-road vehicle performance than the existing idle test. Evaporative emissions control equipment will be checked for function and integrity, resulting in large emissions reductions not achieved with the current program. The geographic expansion will bring approximately 500,000 additional cars into the program. In addition, the projected waiver rate will decrease from approximately 15% of failed vehicles to 3%.

Estimated Emissions Reductions and Methodology

The EPA's mobile emissions model, MOBILE6, with locality-specific inputs and appropriate design parameters for Maryland's enhanced I/M program, was used to estimate the VOC and NOx emissions reductions obtained from this control strategy. The specific methodologies and assumptions associated with modeling the enhanced I/M program can be found in the input stream for the model runs used to prepare the 2005 mobile source emissions budget (see Appendix B.)

Maryland Department of the Environment
Mobile Sources Control Program
Revised Balto Area MOBILE6 Modeling Emission Analysis
Rate of Progress Plan for 1996, 1999, 2002 & 2005

Year of Evaluation	Emission Inventory Type	VOC	NOx	VMT	Scenario	Remarks
	1990 Baseline Emissions	165.1	228.2	55.6	A	From MOBILE6 SIP Budget
1996	1996 Tier-Zero Emissions	99.5	228.0	62.3	B	1990 Controls, 96 VMT, NO 90 CAA, 96 RVP
	1996 Emission Estimates	95.2	222.0	62.3	C	1996+ Controls & 1996 VMT
	1990 Adjusted Baseline 1n 1996	87.2	186.3	55.6	D	1990 Controls & VMT, NO 90 CAA, 96 RVP
1999	1999 Tier-Zero Emissions	96.3	227.8	66.8	E	1990 Controls, 99 VMT, NO 90 CAA, 99 RVP
	1999 Emission Estimates	91.8	212.4	66.8	G	1999+ Controls & 1999 VMT
	1990 Adjusted Baseline 1n 1999	77.5	178.9	55.6	G	1990 Controls & VMT, NO 90 CAA, 99 RVP
2002	2002 Tier-Zero Emissions	86.4	214.3	68.1	H	1990 Controls, 02 VMT, NO 90 CAA, 99 RVP
	2002 Emission Estimates	72.6	186.9	68.1	I	2002+ Controls & 2002 VMT
	1990 Adjusted Baseline 1n 2002	70.3	164.0	55.6	J	1990 Controls & VMT, NO 90 CAA, 99 RVP
2005 Netwk w/New Truck Model	2005 Tier-Zero Emissions	91.80	199.80	72.7	K	1990 Controls, 05 VMT, NO 90 CAA, 99 RVP
	2005 Conformity Budget ³	55.05	144.50	72.7	L	2005+ Controls & 2005 VMT
	1990 Adjusted Baseline 1n 2005	65.33	150.46	55.6	M	1990 Controls & VMT, NO 90 CAA, 99 RVP
	2005 incl. Stage II Ref. Emissions	57.83	141.29	72.21	N	2005+ Controls & 2005 VMT+Refueling
	2005 Refueling. Emissions	2.86				Scenario N minus Scenario L

Note:

- 1) Emission units: tons per Summer WeekDay (SWD)
- 2) VMT units: million miles per SWD
- 4) NonCreditable Emission Benefits from Federal FVMCP & RVP Programs i.e, NCs = (Base 1990 Emissions - minus Adjusted Baseline Emissions)

Prepared by: MDE's Mobile Sources Control Program, Phone (410) 537-4183

Sept. 12, 2003

³ The 2005 Emission Estimates were replaced with mobile source emissions budgets that are more stringent to allow the Baltimore Region to meet 2005 ROP target levels.

6.1.2 Tier I Vehicle Emission Standards and New Federal Evaporative Test Procedures

The Act requires a new and cleaner set of federal motor vehicle emissions standards (Tier I standards) beginning with model year 1994. The Act also required a uniform level of evaporative emission controls, which are more stringent than most evaporative controls used in existing vehicles.

Description of Source Category

These federally implemented programs will affect light duty vehicles and trucks.

Control Strategy

The federal program requires more stringent exhaust emissions standards as well as a uniform level of evaporative emissions controls, demonstrated through new federal evaporative test procedures. The Tier I exhaust standards are to be phased in beginning with model year 1994.

Expected Emissions Reductions and Methodology

The MOBILE6 emissions factor model automatically applies these controls unless the input file has been modified to disable the Act's tailpipe standards and the evaporative test procedure.

6.1.3 Reformulated Gasoline in On-road Vehicles

This federally mandated measure requires the use of lower polluting "reformulated" gasoline in the Baltimore Nonattainment Area.

Description of Source Category

All gasoline-powered vehicles are affected by this control measure. Vehicle refueling emissions at service stations are also reduced. In addition, emissions from gasoline powered nonroad vehicles and equipment will be reduced by this control strategy.

Control Strategy

The Act requires significant changes to conventional fuels for areas that exceed the health-based ozone standard. They require the EPA to establish specifications for reformulated gasoline that would achieve the greatest reduction of VOCs and toxic air pollutants achievable considering costs and technological feasibility.

At a minimum, reformulated gasoline must not cause an increase in NO_x emissions, must have an oxygen content of at least 2.0% by weight, must have a benzene content no greater than 1.0% by volume and must not contain any heavy metals. Most importantly, the Act requires a reduction in VOC and toxic emissions of 15% over base year levels beginning in 1995 and 25% beginning in the year 2000.

Since January of 1995, only gasoline that the EPA has certified as reformulated may be sold to consumers in the nine worst ozone nonattainment areas with populations exceeding 250,000. Other ozone nonattainment areas are permitted to "opt-in" to the federal reformulated gasoline program.

Use of reformulated gasoline is required in the Baltimore nonattainment area.

Expected Emissions Reductions and Methodology

The emissions factor used in calculating the reduction from this measure was determined using MOBILE6. Activity levels were developed using both HPMS VMT data and locality specific transportation model data.

6.1.4 Tier 2 Program,

On December 21, 1999, the EPA announced new regulations effecting emissions standards for the production of new vehicles beginning in 2004 and known as Tier 2 standards. The emissions reduction benefits of this Tier 2 program for the Maryland region will be significant. The new tailpipe standard will take into account all classes of passenger vehicles (including SUV's and light trucks) beginning in 2004. In effect, the rule forces SUV's (Sport Utility Vehicles) and light trucks to meet the same tailpipe emission standards as cars. Simultaneously, the EPA announced lower sulfur in gasoline standards, as part of the new tailpipe standard, which is necessary to enable passenger vehicles to meet Tier 2 emission standards.

As part of the EPA's program for cleaner vehicles, cleaner gasoline, and more protective tailpipe emission standards, the EPA announced lower sulfur in gasoline standards. Lower sulfur content in gasoline is needed to enable passenger vehicles to meet the Tier 2 standards

The benefits of this Tier 2 program for the Maryland region will be significant. The new tailpipe standard will take into account all classes of passenger vehicles (including SUV's and light trucks) beginning in 2004. New sulfur in gasoline standards requires refiners to place caps on sulfur in fuel. These refiners have a great deal of flexibility under the new standard system that allows them to phase the standard in and even use credits from refiners who reduce emissions early.

Description of Source Category

These federally implemented programs will affect light duty vehicles and trucks.

Control Strategy

On December 21, 1999, federal regulations were announced tightening tailpipe emission standards for the third time. In the early 1980's, the Federal Motor Vehicle Control Program began with Tier 0 tailpipe standards. These standards reduced emissions by over 90% from pre-control levels. Implementation of Tier 1 tailpipe standards began with the model year 1994. This round of standards made substantial reductions in carbon monoxide and nitrogen oxides. The new tailpipe standard (Tier 2) will take into account all classes of passenger vehicles (including SUV's and light trucks) beginning in 2004.

6.1.5 National Low Emission Vehicle Program

The NLEV program is a vehicle technology program that will provide motor vehicles that are significantly cleaner than pre-1998 models. The National LEV program was developed through an unprecedented, cooperative effort by the northeastern states, auto manufacturers, environmentalists, fuel providers, U.S. EPA and other interested parties.

National LEV vehicles will be 70 percent cleaner than 1998 models. The National LEV program will result in substantial reductions in volatile organic compounds (VOCs) and oxides of nitrogen (NOx), which contribute to unhealthy levels of smog in many areas across the country.

Description of Source Category

These federally implemented programs will affect light duty vehicles and trucks.

Control Strategy

National LEV vehicles will be 70 percent cleaner than 1998 models. The National LEV program will result in substantial reductions in volatile organic compounds (VOCs) and oxides of nitrogen (NOx), which contribute to unhealthy levels of smog in many areas across the country.

6.1.6 Federal Heavy-Duty Diesel Engine Rule

In 1999, EPA proposed tighter tailpipe emissions standards for cars and light trucks weighing up to 8,500 pounds. Commonly referred to as Tier 2, these standards would take effect beginning in 2004 when manufacturers would start producing passenger cars that are 77 percent cleaner than those on the road today. Light-duty trucks, such as SUVs, which are subject to standards that are less protective than those for cars, would be as much as 95 percent cleaner under the new standards. EPA's heavy-duty engines rule will address all vehicles weighing more than 8,500 pounds, and ensure that the heaviest passenger vans and SUVs will also meet Tier 2 standards.

Description of Source Category

These federally implemented programs will affect all vehicles weighing more than 8,500 pounds.

Control Strategy

On December 21, 1999, federal regulations were announced tightening tailpipe emission standards for the third time. In the early 1980's, the Federal Motor Vehicle Control Program began with Tier 0 tailpipe standards. These standards reduced emissions by over 90% from pre-control levels. Implementation of Tier 1 tailpipe standards began with the model year 1994. This round of standards made substantial reductions in carbon monoxide and nitrogen oxides. The new tailpipe standard (Tier 2) will take into account all classes of passenger vehicles (including SUV's and light trucks) beginning in 2004. EPA's heavy-duty engines rule will address all vehicles weighing more than 8,500 pounds, and ensure that the heaviest passenger vans and SUVs will also meet Tier 2 standards.

Expected Emissions Reductions and Methodology

The MOBILE6 emissions factor model automatically applies these controls unless the input file has been modified to disable the Act's tailpipe standards and the evaporative test procedure.

Expected Total Mobile Emissions Reductions and Methodology

Using MOBILE6, the expected emissions reductions for all of the above Mobile measures (Sections 6.1.1 through 6.1.6) are listed below.

6.1.7 Conformity Regulation

Pursuant to 40 CFR 93.118-119 there is no federal requirement that mobile emission budgets be set at the controlled inventory level determined through modeling exercises. Flexibility in setting the mobile budget is allowed as long as the mobile budgets (mobile emissions) in combination with emissions from all other source sectors meet all applicable CAA requirements and are low enough that Rate of Progress targets can be met. In essence, a state has the authority to establish mobile budgets that are more stringent than the “controlled model results” in an effort to preserve clean air. However, the mobile budgets, in combination with other state and federal control programs, must meet reasonable further progress and rate of progress requirements set by the Clean Air Act.

In setting lower mobile budgets (lower than the controlled model run) the defined lower budgets becomes the federally enforceable budgets. Per the Transportation Conformity Regulations and the Metropolitan Planning Regulations, the lower of the Attainment Plan Mobile Budgets and the Rate of Progress Mobile Budgets are the budgets that all transportation plans be tested against. As this is a federal rule, the lowest budgets become the federally enforceable budget that is permanent and enforceable (in essence it is a state control program as transportation plans cannot proceed above the defined budgets).

40 CFR 93.118 establishes the following requirements of a mobile emissions budget:

#	Federal Requirement	MDE Response
1	The motor vehicle emissions budget(s) is clearly identified and precisely quantified	MDE is clearly defining and precisely identifying a mobile budget in this ROP document that is to be used for all conformity analysis efforts after this ROP modification is reviewed and approved
2	The motor vehicle emissions budget(s), when considered together with all other emissions sources, is consistent with applicable requirements for reasonable further progress, attainment, or maintenance (whichever is relevant to the given implementation plan submission)	MDE has clearly shown in this document that the defined mobile budget in combination with other emission control programs meets the Rate of Progress requirements set in the CAA
3	The motor vehicle emissions budget(s) is consistent with and clearly related to the emissions inventory and the control measures in the submitted control strategy implementation plan revision or maintenance plan	MDE has shown in this modification to the Rate of Progress Plan that all CAA requirements have been satisfied and there is a definitive link between these modifications and the existing approved attainment plan

Description of Source Category

These federally implemented programs will affect all vehicles.

Control Strategy

Per the Transportation Conformity Regulations and the Metropolitan Planning Regulations, the lower of the Attainment Plan Mobile Budgets and the Rate of Progress Mobile Budgets are the budgets that all transportation plans be tested against. As this is a federal rule, the lowest budgets becomes the federally enforceable budgets that are permanent and enforceable (in essence it is a state control program as transportation plans cannot proceed above the defined budget).

Expected Total Mobile Emissions Reductions and Methodology

Using MOBILE6, the expected emissions reductions for all of the above Mobile measures (Sections 6.1.1 through 6.1.6) are listed below.

	2005 VOC	2005 NOx
Baltimore	36.75	55.30

6.1.8 Stage II and New Vehicle On-Board Vapor Recovery Systems

These two separate measures require the installation of Stage II vapor recovery nozzles at gasoline pumps and the requirement of onboard refueling emissions controls for new passenger cars and light trucks beginning in the 1998 model year. Maryland adopted Stage II vapor recovery regulations for the Baltimore and Washington nonattainment areas and Cecil County in January of 1993.

Description of Source Category

When motor vehicle fuel tanks are refueled at a gasoline dispensing facility, gasoline vapors in the fuel tank are displaced by incoming gasoline. The vapors are discharged directly to the air.

Vehicle refueling emissions are the fuel vapors displaced from a vehicle tank when it is filled. These emissions account for a significant portion of the volatile organic compounds (VOCs) released into the air by motor vehicles and contribute to the formation of ozone and smog. In addition, gasoline vapors contain air toxics.

Control Strategy

The Stage II vapor recovery regulation requires that the dispensing system be equipped with nozzles that are designed to return the vapors through a vapor line into the gasoline storage tank. The vapors may be forced back to the storage tank by the pressure of the incoming liquid (vapor balance system) or by a vacuum pump or other mechanical device that creates a vacuum at the nozzle to more efficiently contain the vapors (vapor assist system). Maryland requires all systems used to be approved by the California Air Resources Board (CARB) which ensures a minimum control efficiency of 95 percent.

In addition, an EPA rule requires the use of onboard refueling vapor recovery (ORVR) systems for new passenger cars and light trucks beginning in model 1998. Light trucks include pickups, mini-vans, and most delivery and utility vehicles. Heavy-duty vehicles and trucks over 8,500 pounds gross vehicle weight rating (GVWR) are exempt from the ORVR requirement. Upon full implementation, the ORVR rule will cover over ninety percent of all new gasoline-powered vehicles sold in Maryland.

Essentially, the ORVR system operates by storing the vapors displaced from the fuel tank during a refueling event and subsequently routing these VOC vapors to the engine, where the vapors are burned during vehicle operation. The EPA has allowed manufacturers to retain some flexibility in meeting the requirements. Although the EPA has not prescribed any particular technology, most past ORVR designs have been canister-based. In such a system, the displaced VOC vapors are stored in a canister by being adsorbed onto a bed of activated carbon contained within the canister. During vehicle operation, a manifold vacuum is used to pull ambient air over the carbon bed, stripping the VOCs from the canister. This VOC-rich purge gas is then routed to the engine and burned.

Expected Emissions Reductions and Methodology

The 2005 emissions reductions were calculated as follows:

$$\begin{aligned} \text{Emission reductions for 2005} &= \left\{ \begin{array}{l} 1990 \\ \text{Emissions} \\ \text{(Tons per Day)} \end{array} \times \begin{array}{l} 2005 \text{ BEA} \\ \text{Growth} \\ \text{Factor} \end{array} \right\} - \begin{array}{l} 2005 \\ \text{Emission} \\ \text{Level from} \\ \text{MOBILE6} \end{array} \\ &= \left\{ 13.2 \times 1.175 \right\} - 2.86 \\ &= 12.65 \text{ tpd} \end{aligned}$$

Using MOBILE6, the expected emissions reductions for these measures are listed below.

	2005 VOC	2005 NO_x
Baltimore	12.65	0.0

6.2 Area Source Measures

6.2.1 Municipal Landfills

This measure requires municipal landfills to add new controls based on federal and/or state rules.

Description of Source Category

A municipal solid waste landfill is a disposal facility in a contiguous geographical space where household waste is placed and periodically covered with inert material. Landfill gases are produced from the aerobic and anaerobic decomposition and chemical reactions of the refuse in the landfill. Landfill gases consist primarily of methane and carbon dioxide, with volatile organic compounds making up less than one percent of the total emissions. Although the percentage for VOC emissions seems small, the total volume of gases is large.

Control Strategy for Source Category

The control strategy for this source category began based upon federal rules. On March 12, 1996, the U.S. EPA adopted final New Source Performance Standards for new or recently modified municipal solid waste (MSW) landfills (Subpart WWW) and Emission Guidelines for existing MSW landfills (Subpart CC). The Emission Guidelines (EG) affect the owner or operator of a MSW landfill that was constructed before May 30, 1991; received MSW on or after November 8, 1987; and did not receive a permit for reconstruction or modification between May 30, 1991, and March 12, 1996.

The Maryland Department of the Environment (MDE) adopted a State regulation (COMAR 26.11.19.29) to implement the EG. The State regulation, consistent with the EG, requires that any MSW landfill classified as an EG landfill report the MSW landfill design capacity by June 1, 1997. An affected MSW landfill with a design capacity above 2.75 million tons is also required to report annual non-methane organic compound (NMOC) emissions rates. An affected MSW landfill above 2.75 million tons in capacity and emitting at least 55 tons per year of NMOC is required to submit and implement a compliance plan for collecting and controlling the landfill gas. Three landfills (Millersville, Eastern and Alpha Ridge) meet these requirements are located within the Baltimore nonattainment area.

In addition, MDE has instituted permit conditions on several landfills. Permit number 02 – 9 – 0519 N specifies the permit to construct conditions for the Annapolis Sanitary Landfill and permit number 02 – 9 – 0461 N specifies the permit to construct conditions for the Millersville Landfill.

Each of these permits states the source is subject to all applicable State air pollution control requirements, including, but not limited to the following requirements:

(d) COMAR 26.11.06.06, which limits Volatile Organic Compounds (VOC) emissions to 20 pounds per day, unless the discharge is reduced by 85 percent or more overall.

Inspectors from the Department and the Anne Arundel County Health Department shall be afforded access to the Company's property at any reasonable time for the purpose of:

- (a) Inspecting construction authorized under this permit;
- (b) Sampling any materials stored or processed on site, or any waste or discharge into the environment;
- (c) Inspecting any monitoring equipment required by the permit and applicable regulations;
- (d) Having access to or copying any records relevant to the Department's determination of compliance with air pollution control requirement including all documents required to be kept by this permit and by applicable regulations;
- (e) Obtaining any photographic documentation and evidence; and
- (f) Determining compliance with this permit and applicable regulations.

Under the above stated permit conditions, MDE believes that the emission reductions calculated on the following pages are enforceable.

In general, the control strategy for reducing landfill gas emissions requires a gas collection system with a control device system capable of reducing VOCs in the collected gas by at least 98 weight-percent by weight. Control devices typically used are flares. Energy recovery systems have also been demonstrated to achieve 98 percent emission control at landfills where their use is feasible. Energy recovery systems used to combust landfill emissions include internal combustion engines, gas turbines, and steam generation boilers. Power produced by these systems may be used for heating or to generate electricity.

The Department has estimated that controls achieve 98 percent destruction efficiency with a 75 percent collection efficiency. The expected emissions reductions are found below.

Expected Emissions Reductions, Methodology and Sample Calculation

The Landfill Gas Emission Model, version 2.0, was used to calculate uncontrolled NMOC emissions from this source category.

The model requires the following information to estimate emissions from a landfill:

- The design capacity of the landfill,
- The amount of refuse in place in the landfill, or the annual refuse acceptance rate for the landfill,
- The methane generation rate (k),
- The potential methane generation capacity (L),
- The concentration of total nonmethane organic compounds (NMOC) and speciated NMOC found in the landfill gas,
- The years the landfill has been in operation, and
- Whether the landfill has been used for disposal of hazardous waste (codisposal).

AP-42 default values were chosen as inputs for each regulated landfill. These default values are:

Lo : 100.00 m ³ / Mg	Methane Generation Potential
k : 0.0400 1/yr	Decay Rate/Rate of Decomposition
NMOC : 595.00 ppmv	Non-methane Concentration
Methane : 50.00 % volume	Carbon Dioxide : 50.00 % volume

The estimation method used by the model is a simple first-order decay equation.

Rule Effectiveness

Emission reductions and controls have been added outside of the model. Controlled emission levels have been calculated using an equation documented in AP-42 Section 2.4 – Municipal Solid Waste Landfills, Paragraph 2.4.4.2, Equation (5).

MDE modified the AP-42 controlled emission equation to include rule effectiveness (EPA default value of 80%) to the portion of the equation that estimates emission from controls.

Emission Reduction Equation

E_{CON} = Emissions not collected by the control device + Emissions collected by the control device

$$E_{CON} = [E_{UNC} \times (1 - Eff_{COL} / 100)] + [E_{UNC} \times (Eff_{COL}) \times (1 - (CE \times RE))]$$

where:

- E_{CON} = Controlled Emissions
- E_{UNC} = Uncontrolled Emissions
- Eff_{COL} = Collection Efficiency of the landfill gas collection system, percent;
- CE = Control Efficiency of the landfill gas control or utilization device, percent;
- RE = Rule Effectiveness, default value, 80%.

Controls achieve a 98 percent destruction level and a 75 percent collection efficiency with an 80 percent rule effectiveness, the expected 2002 emissions reduction for Millersville landfill in Anne Arundel County are calculated as follows:

$$E_{CON - 2002} = [E_{UNC - 2002} \times (1 - Eff_{COL} / 100)] + [E_{UNC - 2002} \times (Eff_{COL}) \times (1 - (CE \times RE))]$$

$$E_{CON - 2002} = [65.2348 \times (1 - 0.75)] + [65.2348 \times 0.75 \times (1 - (0.98 \times 0.8))]$$

$$E_{CON - 2002} = 26.8767$$

$$\text{Expected Emission Reduction -2002 (tpd)} = (65.2348 - 26.8767) / 365 = 0.10509$$

Emission reductions from the remaining landfills were calculated in a similar fashion and then totaled for the year 2002.

The 2005 emission reductions were calculated in a similar fashion with their respective emission levels predicted by the landfill model.

Expected Emissions Reductions

The expected emission reductions in tons per day are:

	2005 VOC	2005 NOx
Baltimore	0.2730	0.0

VOC EMISSIONS REDUCTIONS FROM LANDFILLS

Landgem Model Parameters AP-42 Default Values

Lo : 100.00 m ³ / Mg	Methane Generation Potential
k : 0.0400 1/yr	Decay Rate/Rate of Decomposition
NMOC : 595.00 ppmv	Non-methane Concentration
Methane :	50.00 % volume
Carbon Dioxide :	50.00 % volume

1999 Reduction Credit Calculation

County	Landfill Name	NMOC Emissions (Mg/yr) 1999	Uncontrolled Emissions (tons/yr) 1999	Month & Year Controls Operational	Controlled Emissions (tons/yr) 1999	Reduction (tons/day) 1999
Anne Arundel	Millersville	48.69	53.6715	1997-1998	22.1127	0.08646
Anne Arundel	Annapolis	5.86	6.4617	1995-1996	2.6622	0.01041
BNAA Total						0.09687

2002 Reduction Credit Calculation

County	Landfill Name	Emissions (Mg/yr) 2002	Uncontrolled Emissions (tons/yr) 2002	Month & Year Controls Operational	Controlled Emissions (tons/yr) 2002	Reduction (tons/day) 2002
Anne Arundel	Millersville	59.18	65.2348	1997-1998	26.8767	0.10509
Anne Arundel	Annapolis	5.20	5.7309	1995-1996	2.3611	0.00923
Baltimore County	Eastern	34.13	37.6219	Nov-99	15.5002	0.06061
Howard	Alpha Ridge	37.91	41.7886	Nov-99	17.2169	0.06732
BNAA Total						0.24225

2005 Reduction Credit Calculation

County	Landfill Name	Emissions (Mg/yr) 2005	Uncontrolled Emissions (tons/yr) 2005	Month & Year Controls Operational	Controlled Emissions (tons/yr) 2005	Reduction (tons/day) 2005
Anne Arundel	Millersville	68.48	75.4863	1997-1998	31.1003	0.12161
Anne Arundel	Annapolis	4.61	5.0828	1995-1996	2.0941	0.00819
Baltimore County	Eastern	41.43	45.6688	Nov-99	18.8155	0.07357
Howard	Alpha Ridge	39.20	43.2106	Nov-99	17.8028	0.06961
BNAA Total						0.27298

Assumptions:

Above reductions are calculated assuming:

Capture Efficiency =	75%
Destruction Efficiency =	98%
Rule Effectiveness =	80%

AP-42 5th Edition Paragraph 2.4.4.2 most common CE

6.2.2 Burning Ban

This control measure bans open burning during the peak ozone season.

Description of Source Category

Open burning refers to the method of burning that releases uncontrolled emissions. Open burning is primarily used for the disposal of brush, trees, and yard waste and as a method of land clearing by both developers and individual citizens alike. Emissions from open burning include oxides of nitrogen, hydrocarbons, carbon dioxide, carbon monoxide and other toxic compounds. Emissions levels from open burning are high due to the inefficient and uncontrolled manner in which the material is burned.

Control Strategy

The Department adopted a regulation that prohibits open burning during the peak ozone period (June to August). The seasonal prohibition affects only those counties that lie within the serious and severe nonattainment areas. Certain exemptions however must be in place so as not to adversely affect the agriculture industry or restrict fire training and recreational activities.

Estimated Emissions Reductions and Methodology

The 1990 base year emissions estimate for the Baltimore area using EPA approved emission factors for this category was 3.64 tons per day of VOC and 0.76 tons per day of NOx. No growth is assumed for the projected emissions.

The control measure for this category consists of an open burning ban (control efficiency = 100%). A rule effectiveness factor of 96.8% is used. This factor was obtained from a study prepared by E.H. Pechan for the Mid-Atlantic Regional Air Management Association/Mid-Atlantic Northeast Visibility Union (MARAMA/MANE-VU) regarding emission factors and rule effectiveness for open burning.⁴

Since no growth is assumed, the expected emission reductions for 2005 are calculated in a similar manner. The emission reductions were calculated as follows:

$$\begin{aligned} \text{Expected VOC} &= \text{1990 Emissions} & * & \text{Rule Effectiveness} \\ \text{Emission Reductions} &= \text{(Tons per Day)} & & \text{(Percent)} \\ \text{Expected VOC} &= 3.64 & * & 0.968 \\ \text{Emission Reductions} &= & & \\ \text{Expected VOC} &= 3.52 \text{ Tons per Day} & & \\ \text{Emission Reductions} &= & & \end{aligned}$$

⁴ "Open Burning in Residential Areas, Emissions Inventory Development Report," E.H. Pechan & Associates, Inc., January 31, 2003. Prepared for the Mid-Atlantic/Northeast Visibility Union

The expected emission reductions by in tons per day are:

	2005 VOC	2005 NO_x
Baltimore	3.524	0.74

6.2.3 Surface Cleaning/Degreasing

This control measure requires small degreasing operations like gasoline stations, autobody paint shops and machine shops to use less polluting degreasing solvents.

Description of Source Category

Cold degreasing is an operation that uses solvents and other materials to remove oils and grease from metal parts including automotive parts, machined products and fabricated metal components.

Control Strategies for Source Categories

The regulation, COMAR 26.11.19.09, requires the reformulation of cold degreasers to either aqueous solutions or low VOC formulations.

The control requirement involves the use of a reformulation and the emissions are calculated by means of direct determination. EPA guidance on rule effectiveness (RE) states that RE is not required for sources for which emissions are calculated by means of a direct determination (Guidelines for Estimating and Applying Rule Effectiveness for Ozone/CO SIP Base Year Inventories, EPA-454/R-92-010). However, EPA Region 3 has recommended the application of rule effectiveness to this source category.

After a detailed review of all cost-effective approaches to reduce emissions from this source category, the Department adopted a final rule that will achieve greater reductions than originally projected. Maryland's regulation required that the vapor pressure of the degreasing solvent not exceed 1 mm Hg, which will produce a greater than 67 percent reduction in the vapor pressure of degreasing materials. As a result of this part of the regulation, the final rule will achieve emission reductions of 5.76 tons per day. This regulation became effective on June 5, 1995 and was submitted to the EPA on July 12, 1995.

Expected Emissions Reductions, Methodology and Sample Calculation

The regulation should result in a 70 percent reduction in VOC emissions.

The 2002 emission reductions for the Baltimore nonattainment area were calculated as follows:

1990 Emissions (Tons per day) * BEA Growth Factor * Expected Emissions Reductions (Percentage) * Rule Effectiveness = Expected Emissions Reduction in 2002 (Tons per day)

10.42 Tons per day * 0.99 * 0.70 * 0.80 = 5.78 Tons per day

The expected emission reductions in tons per day are the following:

	2005 VOC	2005 NO _x
Baltimore	5.76	0.00

6.2.4 Architectural and Industrial Maintenance Coatings

This federal measure requires reformulation of architectural and industrial maintenance coatings.

Description of Source Category

Architectural and industrial maintenance coatings are field-applied coatings used by industry, contractors, and homeowners to coat houses, buildings, highway surfaces, and industrial equipment for decorative or protective purposes. The different types of coatings include flat, non-flat coatings, and numerous specialty coatings. VOC emissions result from the evaporation of solvents from the coatings during application and drying.

Control Strategy for Source Category

The users of these coatings are small and widespread, making the use of add-on control devices is technically and economically infeasible. Reductions in VOC emissions must therefore be obtained through product reformulation.

Product reformulation is the process of modifying the current formulation of the coating, in this case to obtain a lower VOC content. Product reformulation can involve one or several of the following approaches:

- ❖ Replacing VOC solvents with non-VOC solvents;
- ❖ Increasing the solids content of the coating;
- ❖ Altering the chemistry of the resin so that less solvent is needed for the required viscosity;
- ❖ Switching to a waterborne latex or water-soluble resin system.

The reductions do not include rule effectiveness in the calculation because the control requirement involved the use of reformulation. Therefore, the emissions are calculated by means of a direct determination. EPA guidance on rule effectiveness states that it is not required for sources for which emissions are calculated by means of a direct determination (Guidelines for Estimating and Applying Rule Effectiveness for Ozone/CO SIP Base Year Inventories, EPA-454/R-92-010).

Estimated Emissions Reductions, Methodology and Sample Calculation

On March 22, 1995, the EPA issued a guidance memorandum on credit for reductions from the Architectural and Industrial Maintenance (AIM) Coating Rule. The memorandum stated that the federal AIM coating rule resulted in an overall reduction estimate of 20 percent.

The AIM rule is applicable to the following source categories: Architectural Surface Coating, Traffic Marking, Industrial Maintenance Coatings, and Other Coatings. The 2002 emission reductions for the Baltimore nonattainment area were calculated as follows:

{[1990 Emissions from the Architectural Surface Coating * Respective BEA Growth Factor] + [1990 Emissions from the Traffic Paint Categories * Respective BEA Growth Factor] + [1990 Emissions from the Industrial Maintenance Coatings * Respective BEA Growth Factor] + [1990 Emissions from the Other Coatings Categories * Respective BEA Growth Factor]} * Expected Emissions Reductions (Percentage) = Expected Emissions Reduction in 2002 (Tons per day)

$$\{(19.23 * 1.106) + (0.610 * 1.106) + (3.617 * 0.783) + (3.617 * 0.783)\} * 0.20 = 5.52 \text{ Tons per day}$$

The 1999 and 2005 emission reductions were calculated in a similar fashion with their respective growth factors.

	2005 VOC	2005 NO_x
Baltimore	5.55	0.0

6.2.5 Commercial and Consumer Products

This measure requires the reformulation of certain consumer products to reduce their VOC content.

Description of Source Category

Consumer and commercial products are items sold to retail customers for household, personal or automotive use, along with the products marketed by wholesale distributors for use in institutional or commercial settings such as beauty shops, schools, and hospitals. VOC emissions result from the evaporation of solvent contents in the products or solvents used as propellants.

Control Strategy for Source Category

Control strategies to reduce emissions from consumer products include reformulation of the product, modified and alternative dispensing or delivery systems, and product substitution or elimination.

Product reformulation can be accomplished by substituting water, other non-VOC ingredients, or low-VOC solvents for VOCs in the product.

Alternative application techniques modify the product delivery system and include traditional as well as innovative ways to reduce VOC emissions. This option applies primarily to aerosol products, which produce the majority of the VOC emissions from this category. Methods include the substitution of a hand pump in replacement of the traditional propellants to deliver the product or changing the delivery system from an aerosol to a liquid, solid or powder form.

Product substitution or elimination involves replacing high-VOC products with low or non-VOC emitting products.

The Department used VOC emissions reductions required through the implementation of federal regulations that would establish VOC content standards for various consumer product categories.

The reductions do not include rule effectiveness in the calculation because the control requirement involved the use of reformulation. Therefore, the emissions are calculated by means of a direct determination. EPA guidance on rule effectiveness states that it is not required for sources for which emissions are calculated by means of a direct determination (Guidelines for Estimating and Applying Rule Effectiveness for Ozone/CO SIP Base Year Inventories, EPA-454/R-92-010).

Expected Emissions Reductions, Methodology and Sample Calculation

The EPA issued a memorandum on June 22, 1995, which provided the regulatory schedule and guidance on the expected emission reduction for the federal consumer products rule.

According to the memorandum, the baseline emission factor from the regulated subset resulting from the federal rule is 3.9 pounds per person annually. The emissions reductions are 20% of this subset. The calculation is as follows:

$$\begin{aligned}
 \text{1990 Emissions from regulated subset} &= \frac{(2,348,219 \text{ people affected by rule}) \times (3.9 \text{ lbs/yr/ person})}{(365 \text{ days/year}) \times (2000 \text{ lbs/ton})} \\
 &= 12.545 \text{ tons/day}
 \end{aligned}$$

$$\begin{aligned}
 \text{2002 Emissions from regulated subset} &= \text{1990 Emissions from regulated subset} \times \text{Growth factor} \\
 &= 12.545 \times 1.106 \text{ (1.083 in 1999 and 1.128 in 2005)} \\
 &= 13.875 \text{ tons/day}
 \end{aligned}$$

$$\begin{aligned}
 \text{2002 Emission Reduction} &= \text{2002 Emissions from the regulated subset} \times 20\% \\
 &= 13.875 \times 20\% \\
 &= 2.775 \text{ tons/day}
 \end{aligned}$$

The expected emission reductions in tons per day are:

	2005 VOC	2005 NO_x
Baltimore	2.830	0.0

6.2.6 Automobile Refinishing

This measure based on state regulation requires large and small autobody refinishing operations to use low VOC content materials in the refinishing process and cleanup and to use spray guns to control application.

Description of Source Type

Automobile refinishing is the repainting of worn or damaged automobiles, light trucks and other vehicles. The different types of coatings include primers, surfacers, sealers, topcoats and some specialty coatings. Volatile organic compound emissions result from the evaporation of solvents from the coatings during application, drying and clean up techniques.

Control Strategy for Source Type

The Department adopted regulations requiring the use of reformulated coatings that would reflect standards similar to those in EPA's CTGs for Automobile Refinishing (1991c,e). In addition, the regulation requires the use of equipment with greater transfer efficiency in the application of the coatings, and regulates the use of solvents to clean application equipment.

The reductions do not include rule effectiveness in the calculation because the control requirement involved the use of reformulation. Therefore, the emissions are calculated by means of a direct determination. EPA guidance on rule effectiveness states that it is not required for sources for which emissions are calculated by means of a direct determination (Guidelines for Estimating and Applying Rule Effectiveness for Ozone/CO SIP Base Year Inventories, EPA-454/R-92-010).

Expected Emissions Reductions, Methodology and Sample Calculation

The regulation results in a 60 percent reduction in VOC emissions.

The 2002 emissions reductions for the Baltimore nonattainment area were calculated as follows:

1990 Emissions (Tons per day) * BEA Growth Factor * Expected Emissions Reductions (Percentage) = Expected Emissions Reduction in 2002 (Tons per day)

10.39 Tons per day * 1.249 (1.294 in 2005)* 0.60 = 5.84 Tons per day

The 1999 and 2005 emissions reductions were calculated in a similar fashion with their respective growth factors.

The expected emission reductions in tons per day are:

	2005 VOC	2005 NO _x
Baltimore	8.068	0.0

6.2.7 Screen Printing

This measure requires smaller printers to use control devices and/or low VOC materials to reduce VOC emissions.

Description of Source Category

A screen-printing process is used to apply printing or an image to virtually any substrate. In the screen-printing operation, ink is distributed through a porous screen mesh to which a stencil may have been applied to define an image to be printed on a substrate. The printed substrate is then placed on a drying rack or in a drying unit. After the screen is used, it is transferred to a screen reclamation process to be cleaned for reuse. During this process the ink residue is removed with solvents. Sometimes stencil material and hardened ink appears as a "ghost image" from previous stencil applications. Separate solvent material is used to remove this image.

VOC emissions result from the evaporation of ink solvents and from the use of solvents for cleaning. The major source of VOC emissions is the printing process.

Control Strategy for Source Category

Because the users of these coatings are relatively small, requiring the use of add-on control devices is technically and economically infeasible. Reductions in VOC emissions will be obtained through the use of ink reformulation, process printing modification, and material substitution for cleaning operations.

Ink reformulation is the process of modifying the current formulation of the ink to a lower VOC content. Ink reformulation can involve one or several of the following approaches:

Replacing the VOC solvents with non-VOC solvents;

Increasing the solids content of the coating;

Altering the chemistry of the resin;

In a printing process modification, a typical VOC solvent based printing operation may be replaced with an ultraviolet (UV) ink operation. The UV inks are cured by exposing the printed substrate to an ultraviolet light source. Ultraviolet inks do not contain VOC nor is VOC added to the inks during the operation. For a high production facility, a cost saving can be attributed to using an ultraviolet system over a conventional ink system. For the screen cleaning process there are a number of cleaning systems that contain lower amounts of VOC.

The Department promulgated a regulation with ink standards that would be dependent upon the printed substrate. The cleaning solvents were required to have a lower VOC content. The regulation reflects standards similar to the South Coast Air Quality Management District's (SCAQMD) regulation for screen-printing.

This regulation became effective on June 5, 1995 and submitted to the EPA on July 12, 1995.

Rule Effectiveness

The control requirement involves the use of a reformulation and the emissions are calculated by means of direct determination. EPA guidance on rule effectiveness (RE) states that RE is not required for sources for which emissions are calculated by means of a direct determination (Guidelines for Estimating and Applying Rule Effectiveness for Ozone/CO SIP Base Year Inventories, EPA-454/R-92-010). However, EPA Region 3 has recommended the application of rule effectiveness to this source category.

Expected Emissions Reductions, Methodology and Sample Calculation

The Department expects four sources in the Baltimore area's point source inventory with expected total emissions of 0.44 tons per day to be subject to this measure. In addition, approximately 3 to 5 percent (or 0.135 tons per day) of the graphic arts area source inventory can be attributed to screen-printing sources. Therefore, the total expected emissions for this category is 0.575 tons per day.

Based upon the SCAQMD rule reductions, the Department expects to obtain a 35% emission reduction from the implementation of this rule (SCAQMD, 1991b).

The 2002 emissions reductions were calculated as follows:

$$\begin{aligned}
 \text{Expected total emission reductions for 2002} &= \text{1990 Emissions (Tons per Day)} \times \text{BEA Growth Factor} \times \text{Expected Emissions Reduction (Percent)} \times \text{Rule Effectiveness (Percent)} \\
 &= 0.575 \times 1.19 \times 0.35 \times 80\% \\
 &= 0.1916 \text{ Tons per Day}
 \end{aligned}$$

The expected emission reductions for 1999 and 2005 are calculated similarly except for the change in BEA growth factor to 1.133 and 1.24, respectively.

The expected emission reductions by 1999, 2002 and 2005 in tons per day are as follows:

	2005 VOC	2005 NOx
Baltimore	0.1996	0.0

6.2.8 Graphic Arts – Lithographic Printing

This measure requires smaller printers to use control devices and/or low VOC materials to reduce VOC emissions.

Description of Source Type

This source category consists of numerous small sheet-fed printers that perform non-continuous printing and web printers that print on a continuous web or roll. Heat-set web printers use drying ovens to force dry the printed matter. Web printing sources perform high volume printing on paper or paperboard.

VOC emissions to the air are caused by evaporation of the ink solvents, alcohol in the fountain or dampening solution, and equipment wash solvents. Emissions from sheet fed presses are minimal because most of the VOC from the inks are absorbed in the printed matter. About one third of the VOC from web printing ink is absorbed in the printed matter. Higher VOC emissions are caused by heat-set inks because of the elevated temperatures. These VOC discharges may also cause visible emissions and nuisance odors.

Historically, lithographic web printers have used up to 35 percent isopropyl alcohol (IPA) in the fountain solutions. The volatile alcohol evaporated relatively quickly causing significant VOC emissions. The industry eventually found non-volatile substitutes for the isopropyl alcohol. Web printers are able to utilize 100 percent substitution, however, sheet fed printers with older design printing presses may require a limited amount of alcohol to achieve the required dampening.

Control Strategy for Source Type

Although several control devices were evaluated over the years for web printers, a catalytic oxidizer has proven to be most successful. For heat-set web printers, the dryer emissions are ducted directly into the oxidizer yielding a 100 percent capture of emissions. A typical oxidizer yields 96-98 percent destruction of VOC.

The measure requires that:

- ❖ Web printers use no alcohol in the fountain solutions;
- ❖ Heat-set web printers install an afterburner on the oven exhaust if plant wide emissions exceed 20 pounds per day; and
- ❖ Sheet fed printers use no more than 8.5 percent isopropyl alcohol in the fountain solution and the solution must be refrigerated to 55°F or less.

The EPA Control Techniques Guideline (CTG) included the following controls:

<u>Emission Source</u>	<u>CTG Recommended Control</u>
Inks	90% control (condenser filters) for heatset plants
Fountain Solution	1.6% isopropyl alcohol (IPA) for heatset plants (90% reduction) alcohol substitution for non-heatset (99% reduction) 5% IPA for sheet-fed (50% reduction)
Cleaning Solutions	30% VOC content limit (70% reduction)

The emission reductions described in the 15% RPP for this control measure takes into consideration only one type of printer, lithographic printing. The Department adopted a regulation (COMAR 26.11.19.11 C & D) that limits the amount of isopropyl alcohol in the fountain solutions. Web printers are prohibited from using IPA (100 percent control) while sheet-fed printers are limited to no more than 8.5 percent IPA in the fountain solution. Previously, fountain solutions typically contained 16 percent IPA in the fountain solution (46.88 percent reduction). The IPA requirements in these regulations became effective on January 1, 1992.

The 15% RPP did not include rule effectiveness in the calculation for point sources because this measure constitutes an irreversible process change for the web printers. EPA guidance on rule effectiveness states that it is not required for sources for which an irreversible process change has been applied (Guidelines for Estimating and Applying Rule Effectiveness for Ozone/CO SIP Base Year Inventories, EPA-454/R-92-010). However, the EPA Region 3 has recommended the application of rule effectiveness to this source category.

Expected Emissions Reductions, Methodology, and Sample Calculations

Based on the CTG (based on employment), it was assumed that offset lithographic printing accounts for 64% of total graphic arts emissions. This percentage contribution was applied to total graphic arts area source emissions to estimate total emissions from offset lithography.

The CTG estimated overall reduction for four model plants: heatset web, non-heatset web, non-heatset sheet-fed, and newspaper non-heated web. Since the CTG did not classify the population of sources into these model plants, the numerical average of the overall sources was used for the nonattainment area reductions.

The average control efficiency of 75% (from the CTG), the 64 % penetration and 80 % rule effectiveness were applied to area source graphic art emissions to determine total reductions.

Area Source Emission Reductions

The expected area source emission reductions for 2002 are calculated as follows:

1990 Emissions (Tons per day) * BEA Growth Factor * Expected Emissions Reduction (Percentage)
* Rule Effectiveness (Percentage) * Penetration (Percentage) = Expected Emissions Reduction
(Tons per day)

4.496 Tons per day * 1.166 (1.194 in 2005) * 0.75 * 0.8 * 0.64 = 2.012 Tons per day

Point Source Emission Reductions

The expected point source emission reduction from this control measure is estimated to be 0.5 tons per day (0.6 tons per day in 2002 and 2005). This estimate is based upon a survey of all web set point sources subject to the measure conducted by the Department. The total annual usage of IPA was proportioned to estimate 0.5 tons per day emissions. Since the regulation prohibits the use of IPA in web set printing operations, it was assumed that these emissions (0.5 tons per day) would be eliminated totally.

For sheet-fed lithographic presses, VOC emissions from the fountain solution are estimated by dividing the total annual alcohol use by the operating days. VOC emissions are directly proportional to the amount of wash solvent used or annual consumption divided by operating days. It is assumed that all VOC in the ink is absorbed in the printed matter.

For non-heat-set web systems, calculations are performed the same as for sheet fed but it is assumed 30 percent of the ink solvent is absorbed in the printed matter and the remainder emitted to the atmosphere. Therefore, no VOC reductions are associated with non-heat-set web systems.

For heat-set web systems, a stack test must be performed to determine destruction efficiency (100 percent capture). It is assumed 30 percent of the ink solvent is absorbed in the printed matter and the remainder ducted to the control device.

The total expected emission reductions for the Graphic Arts – Lithographic category in tons per day are the following:

	2005 VOC	2005 NO_x
Baltimore	2.6609	0.0

6.2.9 Graphic Arts – Flexographic and Rotogravure Printing

This measure requires smaller printers to use control devices and/or low VOC materials to reduce VOC emissions.

Description of Source Type

This source category consists of numerous small flexographic or rotogravure printers that perform non-continuous sheet fed printing and continuous web or roll printing.

Flexographic printing employs plates with raised images and only the raised image comes in contact with the substrate during printing. Typically, flexographic plates are made of plastic, rubber, or some other flexible material, which is attached to a roller or cylinder for ink application. Modern presses are now equipped with enclosed doctor blade systems which eliminate the fountain roller and fountain, thereby reducing evaporation loss. In a typical flexographic printing operation, the cylinder plate is removed from the press and is cleaned in a separate area.

Gravure printing uses almost exclusively electro-mechanically engraved copper image carriers to separate the image area from the non-image area. Typically, the gravure image carrier is a cylinder.

In gravure printing, ink is applied to the engraved cylinder, then wiped from the surface by the doctor blade, leaving ink only on the engraved image area. The printing substrate is brought into contact with the cylinder with sufficient pressure so that it picks up the ink left in the depressions on the cylinder. In a typical gravure printing operation, the cylinder is removed from the press and is re-plated for the new process.

VOC emissions to the air are caused almost entirely by evaporation of the ink solvents.

Control Strategy for Source Type

Although several control devices were evaluated over the years for rotogravure and flexographic web printers, a catalytic oxidizer has proven to be most successful. For heat set web printers, the dryer emissions are ducted directly into the oxidizer yielding nearly a 100 percent capture of emissions. A typical oxidizer yields 96-98 percent destruction of VOC.

The measure requires that:

- ❖ Printers reduce emissions by using water-based inks that contain less than 25 percent VOC by volume of the volatile portion of the ink, or high solids inks that contain not less than 60 percent nonvolatiles; or
- ❖ If compliance with these requirements cannot be achieved, reduce the VOC content of each ink, or reduce the average VOC content of inks used at each press as follows:
 - ❖ 60 percent reduction for flexographic presses,
 - ❖ 65 percent reduction for packaging rotogravure presses, and
 - ❖ 75 percent reduction for publication rotogravure presses.

Maryland adopted a printing regulation in 1987 that required any person who causes or permits the discharge of any emissions of VOC from any roll-printing utilizing flexography, packaging rotogravure, or publication rotogravure in excess of 550 pounds per day to reduce the discharge by the following percentage indicated:

<u>Roll Printing Method</u>	<u>Reduction</u>
Flexography	60%
Packaging Rotogravure	65%
Publication Rotogravure	75%

This regulation is applicable only to sources emitting over 550 pounds per day and thus only addresses certain point sources. Some web printers were in compliance with this requirement in 1990. Also many printers installed stack afterburners or oxidizers because they were cited for visible emission or nuisance odor violations. Most sources were in compliance with all requirements by early 1992.

The Maryland regulation was amended at the end of 1993 to change the trigger level for installing a control device to 100 pounds per day. In addition, the regulation now addresses all flexographic, packaging rotogravure and publication rotogravure printers who apply a clear protective coating over the printed matter. The provisions of the regulation do not apply to printing on fabric, metal or plastic.

Therefore, the expected point source emission reduction from this control measure are included in the base year uncontrolled emission inventory. However, area source controls have not been reflected in the base year emission inventory.

The 15% RPP did not include rule effectiveness in the calculation for point sources because this measure constitutes an irreversible process change for the web printers. EPA guidance on rule effectiveness states that it is not required for sources for which an irreversible process change has been applied to (Guidelines for Estimating and Applying Rule Effectiveness for Ozone/CO SIP Base Year Inventories, EPA-454/R-92-010). However, the EPA Region 3 has recommended the application of rule effectiveness to this source category.

Expected Emissions Reductions, Methodology, and Sample Calculations

Based on a November 1996 EIIP document entitled Graphic Arts, the estimated percentage of product market share for rotogravure printing is 18 percent and the estimated percentage of market share for flexographic printing is 18 percent. This percentage contribution was applied to total graphic arts area source emissions, to estimate total emissions from either flexographic or rotogravure printing.

The average control efficiency for flexographic printers is assumed to be 60% (from COMAR 26.11.19.10) * 90% (estimated percent of emissions attributable to evaporation of ink solvent).

The average control efficiency for rotogravure printers is assumed to be 70% (from COMAR 26.11.19.10) * 90% (estimated percent of emissions attributable to evaporation of ink solvent).

The average control efficiency for each type of printing operation and the 18 % penetration were applied to area source graphic art emissions to determine total reductions.

The expected area source emission reductions for 2002 are calculated as follows:

1990 Emissions (Tons per day) * BEA Growth Factor * Expected Emissions Reduction (Percentage) * Rule Effectiveness (Percentage) * Penetration (Percentage) = Expected Emissions Reduction (Tons per day)

Flexographic Printing

4.496 Tons per day * 1.166 (1.194 in 2005) * (0.6 * 0.9) * 0.8 * 0.18 = 0.408 Tons per day

Rotogravure Printing

4.496 Tons per day * 1.166 (1.194 in 2005) * (0.70 * 0.9) * 0.8 * 0.18 = 0.476 Tons per day

The total expected emission reductions in tons per day are the following:

	2005 VOC	2005 NOx
Baltimore	0.9044	0.0

6.2.10 OTC – Consumer Products

This measure requires reformulation of approximately 80 types of consumer products to reduce their VOC content. It uses more stringent VOC content limits than the existing Federal consumer products rule. The rule also contains requirements for labeling and reporting.

Description of Source Type

Manufacturers of various specialty chemicals named in the rule, such as aerosol adhesives, floor wax strippers, dry cleaning fluids and general purpose cleaners.

Control Strategy for Source Type

Manufacturers are expected to demonstrate compliance with the rule primarily through a California Air Resources Board (CARB) test method. If complying with the VOC contents becomes difficult, flexibility options are provided.

Expected Emissions Reductions, Methodology, and Sample Calculations

E.H. Pechan calculated state-by-state emission benefits from the consumer products rule for the OTC region. Further details are available from Reference 1 and on the following page.

	2005 VOC	2005 NO_x
Baltimore	3.57	0.0

References

E.H. Pechan, “Control Measure Development Support Analysis for the Ozone Transport Commission Model Rules”, March 31, 2001.

6.3 Non-Road Measures

6.3.1 Nonroad Small Gasoline Engines

This measure requires small gasoline-powered engine equipment, such as lawn and garden equipment, manufactured after August 1, 1996 to meet federal emissions standards.

Description of Source Category

Small gasoline-powered engine equipment includes lawn mowers, trimmers, generators, compressors, etc. These measures apply to equipment with engines of less than 25 horsepower. VOC emissions result from combustion and evaporation of gasoline used to power this equipment.

Control Strategy

EPA promulgated regulations for this type of equipment in two phases. In the first phase, EPA developed regulations similar to California's regulation for 1995 and later utility and lawn and garden equipment engines through the normal regulatory process. The second phase of regulation used a consultative approach of negotiated rulemaking to develop consensus on important issues, such as useful life, in-use emissions, evaporative emissions, test procedures, and market based incentive programs.

Expected Emissions Reductions, Methodology and Sample Calculation

The regulation results in a 32 percent reduction in VOC emissions for Phase I. Phase II will produce an additional 4.38% for handheld spark ignition engines and 8.67% reduction for non-handheld spark ignition engines by 2002. Phase II will produce an additional 43.18% for handheld spark ignition engines and 23.88% reduction for non-handheld spark ignition engines by 2005.

The following is a sample calculation of 2005 emissions reductions for the Baltimore nonattainment for trimmers/edgers/brush cutters:

Phase I Emission Reductions:

1990 Emissions (Tons per day) * BEA Growth Factor * Expected Phase I Emissions Reduction (Percentage) = Expected Phase I Emissions Reduction in 2002 (Tons per day)

$$(2.143 \text{ Tons per day} * 1.2117 * 0.32) = 0.8311 \text{ Tons per day}$$

Phase II Emission Reductions:

{[1990 Emissions (Tons per day) * BEA Growth Factor] – Phase I Emission Reductions} * Expected Additional Phase II Emissions Reductions (Percentage) = Expected Phase II Emissions Reduction in 2002 (Tons per day)

$$[(2.143 \text{ Tons per day} * 1.2117) - 0.8311] * 0.4318 = 0.7626 \text{ Tons per day}$$

Total Phase I and Phase II Emission Reductions:

Phase I Emission Reductions + Phase II Emission Reductions = Total Emission Reductions

$$0.8311 + 0.7626 = 1.5936 \text{ Tons per day}$$

The emissions reductions for all involved categories were calculated in a similar fashion with their respective growth factors. A spreadsheet with calculations for this category follow this description.

The expected emission reductions by 2005 in tons per day are:

	2005 VOC	2005 NO_x
Baltimore	17.51	-0.45

Equipment Type	Equip Cat	Cat Type	2002 VOC Emission Credits			Small Gas Engine		Small Gas Engine		Small Gas Engine Emission Total PH 1 & PH 2 Reduction
			Diesel VOC tpsd	4-Stroke VOC tpsd	2-Stroke VOC tpsd	Emission PH 1 Reduction	Emission After Ph 1	Emission PH 2 Reduction		
Trimmers/Edgers/Brush Cutters	1	1	0.0000	0.0000	2.5162	0.8052	1.7110	0.0749	0.8801	
Lawn Mowers	1	2	0.0000	5.3376	3.5992	2.8598	6.0770	0.2662	3.1259	
Leaf Blowers/Vacuums	1	3	0.0000	0.0000	0.8761	0.2804	0.5958	0.0261	0.3065	
Rear Engine Riding Mowers	1	4	0.0000	0.1788	0.0000	0.0572	0.1216	0.0053	0.0626	
Front Mowers	1	5	0.0000	0.0655	0.0000	0.0209	0.0445	0.0019	0.0229	
Chainsaws <4HP	1	6	0.0000	0.0000	3.5453	1.1345	2.4108	0.1056	1.2401	
Shredders <5HP	1	7	0.0000	0.0144	0.0036	0.0058	0.0122	0.0005	0.0063	
Tillers <5HP	1	8	0.0000	0.4642	0.0108	0.1520	0.3230	0.0141	0.1662	
Lawn & Garden Tractors	1	9	0.0108	1.6375	0.0000	0.5240	1.1135	0.0488	0.5728	
Wood Splitters	1	10	0.0000	0.0909	0.0000	0.0291	0.0618	0.0027	0.0318	
Snowblowers	1	11	0.0000	0.0455	0.0160	0.0197	0.0418	0.0018	0.0215	
Chippers/Stump Grinders	1	12	0.0108	0.4565	0.0000	0.0000	0.4565	0.0000	0.0000	
Commercial Turf Equip.	1	13	0.0000	1.8020	0.0000	0.5767	1.2254	0.0537	0.6303	
Other Lawn & Garden Equip.	1	14	0.0000	0.0234	0.0360	0.0190	0.0404	0.0018	0.0208	
Aircraft Support Equip.	2	1	0.0623	0.0514	0.0000	0.0000	0.0514	0.0000	0.0000	
Terminal Tractors	2	2	0.7945	0.3327	0.0039	0.0000	0.3366	0.0000	0.0000	
All Terrain Vehicles	3	1	0.0000	0.1863	0.1033	0.0000	0.2895	0.0000	0.0000	
Minibikes	3	2	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	
Off-Road Motorcycles	3	3	0.0000	0.0053	0.1098	0.0000	0.1151	0.0000	0.0000	
Golf Carts	3	4	0.0000	0.1773	0.2755	0.1449	0.3079	0.0267	0.1716	
Snowmobiles	3	5	0.0000	0.0000	0.0307	0.0000	0.0307	0.0000	0.0000	
Specialty Vehicle Carts	3	6	0.0000	0.0144	0.1151	0.0414	0.0881	0.0076	0.0491	
Vessels w/Inboard Engines	4	1	0.0411	1.0470	0.0000	0.0000	1.0470	0.0000	0.0000	
Vessels w/Outboard Engines	4	2	0.0000	0.0041	6.6542	0.8523	5.8060	0.0000	0.8523	
Vessels w/Sternboard Engines	4	3	0.0000	1.2488	0.0000	0.0000	1.2488	0.0000	0.0000	
Sailboat Auxiliary Inboard Engines	4	4	0.0123	0.0021	0.0000	0.0000	0.0021	0.0000	0.0000	
Sailboat Auxiliary Outboard Engines	4	5	0.0000	0.0000	0.0246	0.0032	0.0215	0.0000	0.0032	
Generator Sets <50 HP	5	1	0.0398	1.9872	1.7000	1.1799	2.5073	0.1098	1.2897	
Pumps <50 HP	5	2	0.0108	0.4186	0.0361	0.1455	0.3092	0.0135	0.1591	
Air Compressors <50 HP	5	3	0.0072	0.2564	0.0000	0.0820	0.1743	0.0076	0.0897	
Gas Compressors <50 HP	5	4	0.0000	0.0000	0.0145	0.0000	0.0145	0.0000	0.0000	
Welders <50 HP	5	5	0.0253	0.3802	0.0000	0.1217	0.2586	0.0113	0.1330	
Pressure Washers <50 HP	5	6	0.0000	0.1380	0.0000	0.0441	0.0938	0.0041	0.0483	
Aerial Lifts	6	1	0.0105	0.1500	0.0105	0.0000	0.1605	0.0000	0.0000	
Forklifts	6	2	0.1434	0.9260	0.6190	0.0000	1.5451	0.0000	0.0000	
Sweepers/Scrubbers	6	3	0.1119	0.0732	0.0216	0.0000	0.0949	0.0000	0.0000	
Other Industrial Equip.	6	4	0.0280	0.0452	0.0945	0.0447	0.0950	0.0042	0.0489	
Other Material Handling Equip.	6	5	0.0035	0.0035	0.0000	0.0000	0.0035	0.0000	0.0000	
Asphalt Pavers	7	1	0.0107	0.0054	0.0000	0.0000	0.0054	0.0000	0.0000	
Tampers/Rammers	7	2	0.0000	0.0000	0.1610	0.0515	0.1095	0.0048	0.0563	
Plate Compactors	7	3	0.0000	0.0498	0.2616	0.0996	0.2117	0.0093	0.1089	
Concrete Pavers	7	4	0.0107	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	
Rollers	7	5	0.0376	0.0791	0.0000	0.0253	0.0538	0.0047	0.0300	
Scrapers	7	6	0.1664	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	
Paving Equipment	7	7	0.0644	0.1356	0.1610	0.0949	0.2017	0.0175	0.1124	
Surfacing Equipment	7	8	0.0000	0.0456	0.0000	0.0146	0.0310	0.0027	0.0173	
Signal Boards	7	9	0.0054	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	
Trenchers	7	10	0.0590	0.0577	0.0000	0.0000	0.0577	0.0000	0.0000	
Bore/Drill Rigs	7	11	0.0376	0.0299	0.0107	0.0000	0.0406	0.0000	0.0000	
Excavators	7	12	0.2200	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	
Concrete/Industrial Saws	7	13	0.0000	0.1810	0.0000	0.0579	0.1231	0.0054	0.0633	
Cement and Mortar Mixers	7	14	0.0000	0.0741	0.0000	0.0237	0.0504	0.0044	0.0281	
Cranes	7	15	0.3918	0.0161	0.0000	0.0000	0.0161	0.0000	0.0000	
Graders	7	16	0.2576	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	
Off-Highway Trucks	7	17	0.4562	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	
Crushing/Proc. Equip.	7	18	0.0429	0.0054	0.0000	0.0000	0.0054	0.0000	0.0000	
Rough Terrain Forklifts	7	19	0.1395	0.0149	0.0000	0.0000	0.0149	0.0000	0.0000	
Rubber Tired Loaders	7	20	0.6601	0.0161	0.0000	0.0000	0.0161	0.0000	0.0000	
Rubber Tired Dozers	7	21	0.0590	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	
Tractors/Loaders/Backhoes	7	22	0.6601	0.0054	0.0000	0.0000	0.0054	0.0000	0.0000	
Crawler Tractors	7	23	1.4744	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	
Skid Steer Loaders	7	24	0.2683	0.0418	0.0000	0.0000	0.0418	0.0000	0.0000	
Off-Highway Tractors	7	25	0.6172	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	
Dumpers/Tenders	7	26	0.0000	0.0054	0.0000	0.0017	0.0036	0.0003	0.0020	
Other Construction Equip.	7	27	0.0429	0.0203	0.0000	0.0000	0.0203	0.0000	0.0000	
2-Wheel Tractors	8	1	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	
Agricultural Tractors	8	2	1.4904	0.0175	0.0000	0.0000	0.0175	0.0000	0.0000	
Agricultural Mowers	8	3	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	
Combines	8	4	0.0438	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	
Sprayers	8	5	0.0000	0.0088	0.0000	0.0028	0.0060	0.0005	0.0033	
Balers	8	6	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	
Tillers >5HP	8	7	0.0000	0.1161	0.0000	0.0372	0.0790	0.0068	0.0440	
Swathers	8	8	0.0044	0.0283	0.0000	0.0000	0.0283	0.0000	0.0000	
Hydro Power Units	8	9	0.0000	0.0044	0.0000	0.0014	0.0030	0.0003	0.0017	
Other Agricultural Equip.	8	10	0.0044	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	
Chainsaws >4HP	9	1	0.0000	0.0000	0.4039	0.1292	0.2746	0.0120	0.1413	
Shredders >5HP	9	2	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	
Skidders	9	3	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	
Fellers/Bunchers	9	4	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	
Total						9.68		0.8571	10.5409	
Marine Vessels Reduction Total						0.8554			0.8554	
Total SI Engines minus Marine Vessels						8.828			9.686	

Equipment Type	2005 VOC Emission Credits						Small Gas Engine		Small Gas Engine	
	Equip	Cat	Diesel	4-Stroke	2-Stroke	Small Gas Engine	Emission	Small Gas Engine	Emission	
	Cat	Type	VOC	VOC	VOC	Emission	After PH 1	Emission	Total PH 1 & PH 2	
			tpsd	tpsd	tpsd	PH 1 Reduction		PH 2 Reduction	Reduction	
Trimmers/Edgers/Brush Cutters	1	1	0.0000	0.0000	2.5971	0.8311	1.7660	0.7626	1.5936	
Lawn Mowers	1	2	0.0000	5.5091	3.7148	2.9517	6.2723	2.7084	5.6600	
Leaf Blowers/Vacuums	1	3	0.0000	0.0000	0.9043	0.2894	0.6149	0.2655	0.5549	
Rear Engine Riding Mowers	1	4	0.0000	0.1846	0.0000	0.0591	0.1255	0.0542	0.1133	
Front Mowers	1	5	0.0000	0.0676	0.0000	0.0216	0.0459	0.0198	0.0415	
Chainsaws <4HP	1	6	0.0000	0.0000	3.6593	1.1710	2.4883	1.0745	2.2454	
Shredders <5HP	1	7	0.0000	0.0149	0.0037	0.0059	0.0126	0.0055	0.0114	
Tillers <5HP	1	8	0.0000	0.4791	0.0112	0.1569	0.3334	0.1440	0.3009	
Lawn & Garden Tractors	1	9	0.0112	1.6902	0.0000	0.5408	1.1493	0.4963	1.0371	
Wood Splitters	1	10	0.0000	0.0938	0.0000	0.0300	0.0638	0.0275	0.0576	
Snowblowers	1	11	0.0000	0.0469	0.0166	0.0203	0.0432	0.0186	0.0390	
Chippers/Stump Grinders	1	12	0.0112	0.4711	0.0000	0.0000	0.4711	0.0000	0.0000	
Commercial Turf Equip.	1	13	0.0000	1.8599	0.0000	0.5952	1.2648	0.5461	1.1413	
Other Lawn & Garden Equip.	1	14	0.0000	0.0241	0.0372	0.0196	0.0417	0.0180	0.0376	
Aircraft Support Equip.	2	1	0.0701	0.0578	0.0000	0.0000	0.0578	0.0000	0.0000	
Terminal Tractors	2	2	0.8942	0.3745	0.0044	0.0000	0.3789	0.0000	0.0000	
All Terrain Vehicles	3	1	0.0000	0.1914	0.1061	0.0000	0.2975	0.0000	0.0000	
Minibikes	3	2	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	
Off-Road Motorcycles	3	3	0.0000	0.0054	0.1128	0.0000	0.1183	0.0000	0.0000	
Golf Carts	3	4	0.0000	0.1822	0.2831	0.1489	0.3164	0.0756	0.2245	
Snowmobiles	3	5	0.0000	0.0000	0.0315	0.0000	0.0315	0.0000	0.0000	
Specialty Vehicle Carts	3	6	0.0000	0.0148	0.1183	0.0426	0.0905	0.0216	0.0642	
Vessels w/Inboard Engines	4	1	0.0424	1.0810	0.0000	0.0000	1.0810	0.0000	0.0000	
Vessels w/Outboard Engines	4	2	0.0000	0.0042	6.8704	1.7874	5.0872	0.0000	1.7874	
Vessels w/Sternboard Engines	4	3	0.0000	1.2893	0.0000	0.0000	1.2893	0.0000	0.0000	
Sailboat Auxiliary Inboard Engines	4	4	0.0127	0.0022	0.0000	0.0000	0.0022	0.0000	0.0000	
Sailboat Auxiliary Outboard Engines	4	5	0.0000	0.0000	0.0254	0.0066	0.0188	0.0000	0.0066	
Generator Sets <50 HP	5	1	0.0432	2.1592	1.8471	1.2820	2.7243	1.1764	2.4584	
Pumps <50 HP	5	2	0.0118	0.4548	0.0392	0.1581	0.3360	0.1451	0.3032	
Air Compressors <50 HP	5	3	0.0079	0.2786	0.0000	0.0891	0.1894	0.0818	0.1709	
Gas Compressors <50 HP	5	4	0.0000	0.0000	0.0157	0.0000	0.0157	0.0000	0.0000	
Welders <50 HP	5	5	0.0275	0.4131	0.0000	0.1322	0.2809	0.1213	0.2535	
Pressure Washers <50 HP	5	6	0.0000	0.1499	0.0000	0.0480	0.1019	0.0440	0.0920	
Aerial Lifts	6	1	0.0113	0.1610	0.0113	0.0000	0.1722	0.0000	0.0000	
Forklifts	6	2	0.1540	0.9940	0.6645	0.0000	1.6585	0.0000	0.0000	
Sweepers/Scrubbers	6	3	0.1202	0.0786	0.0232	0.0000	0.1018	0.0000	0.0000	
Other Industrial Equip.	6	4	0.0300	0.0486	0.1014	0.0480	0.1020	0.0440	0.0920	
Other Material Handling Equip.	6	5	0.0038	0.0038	0.0000	0.0000	0.0038	0.0000	0.0000	
Asphalt Pavers	7	1	0.0115	0.0057	0.0000	0.0000	0.0057	0.0000	0.0000	
Tampers/Rammers	7	2	0.0000	0.0000	0.1724	0.0552	0.1172	0.0506	0.1058	
Plate Compactors	7	3	0.0000	0.0533	0.2801	0.1067	0.2267	0.0979	0.2046	
Concrete Pavers	7	4	0.0115	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	
Rollers	7	5	0.0402	0.0847	0.0000	0.0271	0.0576	0.0138	0.0409	
Scrapers	7	6	0.1781	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	
Paving Equipment	7	7	0.0689	0.1451	0.1724	0.1016	0.2159	0.0516	0.1532	
Surfacing Equipment	7	8	0.0000	0.0488	0.0000	0.0156	0.0332	0.0079	0.0235	
Signal Boards	7	9	0.0057	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	
Trenchers	7	10	0.0632	0.0617	0.0000	0.0000	0.0617	0.0000	0.0000	
Bore/Drill Rigs	7	11	0.0402	0.0320	0.0115	0.0000	0.0435	0.0000	0.0000	
Excavators	7	12	0.2356	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	
Concrete/Industrial Saws	7	13	0.0000	0.1938	0.0000	0.0620	0.1318	0.0569	0.1189	
Cement and Mortar Mixers	7	14	0.0000	0.0793	0.0000	0.0254	0.0539	0.0129	0.0383	
Cranes	7	15	0.4194	0.0172	0.0000	0.0000	0.0172	0.0000	0.0000	
Graders	7	16	0.2758	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	
Off-Highway Trucks	7	17	0.4884	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	
Crushing/Proc. Equip.	7	18	0.0460	0.0057	0.0000	0.0000	0.0057	0.0000	0.0000	
Rough Terrain Forklifts	7	19	0.1494	0.0160	0.0000	0.0000	0.0160	0.0000	0.0000	
Rubber Tired Loaders	7	20	0.7067	0.0172	0.0000	0.0000	0.0172	0.0000	0.0000	
Rubber Tired Dozers	7	21	0.0632	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	
Tractors/Loaders/Backhoes	7	22	0.7067	0.0057	0.0000	0.0000	0.0057	0.0000	0.0000	
Crawler Tractors	7	23	1.5786	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	
Skid Steer Loaders	7	24	0.2873	0.0447	0.0000	0.0000	0.0447	0.0000	0.0000	
Off-Highway Tractors	7	25	0.6608	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	
Dumpers/Tenders	7	26	0.0000	0.0057	0.0000	0.0018	0.0039	0.0009	0.0028	
Other Construction Equip.	7	27	0.0460	0.0217	0.0000	0.0000	0.0217	0.0000	0.0000	
2-Wheel Tractors	8	1	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	
Agricultural Tractors	8	2	1.4904	0.0175	0.0000	0.0000	0.0175	0.0000	0.0000	
Agricultural Mowers	8	3	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	
Combines	8	4	0.0438	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	
Sprayers	8	5	0.0000	0.0088	0.0000	0.0028	0.0060	0.0014	0.0042	
Balers	8	6	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	
Tillers >5HP	8	7	0.0000	0.1161	0.0000	0.0372	0.0790	0.0189	0.0560	
Swathers	8	8	0.0044	0.0283	0.0000	0.0000	0.0283	0.0000	0.0000	
Hydro Power Units	8	9	0.0000	0.0044	0.0000	0.0014	0.0030	0.0007	0.0021	
Other Agricultural Equip.	8	10	0.0044	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	
Chainsaws >4HP	9	1	0.0000	0.0000	0.4394	0.1406	0.2988	0.1290	0.2696	
Shredders >5HP	9	2	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	
Skidders	9	3	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	
Fellers/Bunchers	9	4	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	
					Total	11.013		8.293	19.306	
					Marine Vessels Reduction Total	1.794			1.794	
					Total SI Engines minus Marine Vessels	9.219			17.512	

Projected Phase 2 Annual Nationwide Exhaust HC and NOx Emissions in Tons/Yr
for Nonroad SI Handheld Engines

Year	HC + NOx	HC	NOx
2000	421,420	418,362	3,058
2001	430,254	427,124	3,130
2002	420,785	417,470	3,315
2003	397,428	393,849	3,579
2004	339,542	335,935	3,607
2005	269,251	265,647	3,604

Projected Phase 1 Annual Nationwide Exhaust HC and NOx Emissions in Tons/Yr
for Nonroad SI Handheld Engines

Year	HC + NOx	HC	NOx
2000	421,420	418,362	3,058
2001	430,254	427,124	3,130
2002	439,799	436,587	3,212
2003	449,879	446,584	3,295
2004	460,340	456,961	3,379
2005	470,970	467,505	3,465

Projected Phase 2 Annual Nationwide Exhaust HC and NOx Emissions in Tons/Yr
for Nonroad SI Non-Handheld Engines

Year	HC + NOx	HC	NOx
2000	427,063	356,085	70,978
2001	410,793	339,093	71,700
2002	394,179	322,915	71,264
2003	377,267	307,224	70,043
2004	362,159	293,424	68,735
2005	347,065	279,888	67,177

Projected Phase 1 Annual Nationwide Exhaust HC and NOx Emissions in Tons/Yr
for Nonroad SI Non-Handheld Engines

Year	HC + NOx	HC	NOx
2000	427,063	356,085	70,978
2001	428,442	353,121	75,321
2002	432,010	353,582	78,428
2003	437,973	357,032	80,941
2004	445,141	361,881	83,260
2005	453,129	367,710	85,419

6.3.2 Non-Road Diesel Engines Tier I and Tier II

This measure takes credit for NO_x emissions reductions attributable to emissions standards promulgated by the EPA for non-road, compression-ignition (i.e., diesel-powered) utility engines, as authorized under 42 U.S.C. § 7547. The measure affects diesel-powered (or other compression-ignition) heavy-duty farm, construction equipment, industrial equipment, etc., rated at or above 37 kilowatts (37 kilowatts is approximately equal to 50 horsepower).

Description of Source Category

Heavy-duty farm and construction equipment includes asphalt pavers, rollers, scrapers, rubber-tired dozers, agricultural tractors, combines, balers, and harvesters. This measure applies to all compression-ignition engines at or above 37 kW (50 horsepower) except engines used in aircraft, marine vessels, locomotives and underground mining activity. NO_x emissions result from combustion of diesel fuel used to power this equipment.

Control Strategy

Federal emissions standards applicable to compression-ignition non-road utility engines were promulgated under §7547 (a). The Federal emissions standard are part of a 3-tiered progression to low emission standards. Each tier involves a phase in (by horsepower rating) over several years. EPA has the authority to require emission standards for nonroad mobile sources under section 213(a)(3) of the Act.

The EPA's initial final rule on the Tier 1 emissions standards was published in 59 *Federal Register* 31306 (June 17, 1994), and was effective on July 18, 1994. These Tier 1 standards were adopted in 1994 for engines over 50 hp (such as bulldozers) and were phased in from 1996 to 2000. EPA has promulgated regulations for NO_x emissions and smoke standards for new heavy-duty farm and construction equipment with gross maximum power output measured at or above 37 kW (50 horsepower). The NO_x emissions standard is 9.2 grams per kilowatt-hour (6.9 grams per brake horsepower hour). NO_x standards will be phased in depending upon the horsepower of the engine, beginning with the 1996 model year. The first standards to take effect will be for engines at or above 175 hp and at or below 750 hp.

The EPA's second rule which promulgated the second and third tier of standards was published in 64 *Federal Register* 56968 (October 23, 1998), and was effective on December 22, 1998. This final rule set Tier 1 standards for engines under 50 hp (such as lawn tractors), phasing in from 1999 to 2000. It also phases in more stringent Tier 2 standards for *all* engine sizes from 2001 to 2006, and yet more stringent Tier 3 standards for engines rated over 50 hp from 2006 to 2008.

Projected reductions are technically achievable within a short time period because the emissions control technologies necessary to meet the proposed standards are known to be effective on similar on-highway engines.

Expected Emissions Reductions, Methodology and Sample Calculation

The Tier I regulation results in NO_x emissions reductions of 16.2% by 2002 and 23.5% by 2005. Tier II regulations apply an additional 9.2% reduction to specific equipment types.

The following is a sample calculation of 2005 emissions reductions for the Baltimore nonattainment for agricultural tractors:

Tier 1 Benefits

$$1990 \text{ Emissions (Tons per day)} * \text{BEA Growth Factor} * \text{Expected Emissions Reduction (Percentage)} = \text{Expected Emissions Reduction in 2005 (Tons per day)}$$

$$7.364 \text{ Tons per day} * 1.0 * 0.235 = 1.73 \text{ Tons per day}$$

Tier 2 Benefits

$$\{ [1990 \text{ Emission (Tons per day)} * \text{BEA Growth Factor}] - [1990 \text{ Emissions (Tons per day)} * \text{BEA Growth Factor} * \text{Expected Emissions Reduction (Percentage)}] \} * 0.097 = \text{Expected Emissions Reduction in 2005 (Tons per day)}$$

$$\{ [7.364 \text{ Tons per day} * 1.0] - [7.364 \text{ Tons per day} * 1.0 * 0.235] \} * 0.097 = .5465 \text{ Tons per day}$$

Total Benefits = Tier 1 Benefits + Tier 2 Benefits

$$\text{Total Benefits} = 7.364 + 0.5464$$

$$\text{Total Benefits} = 2.2771$$

All of the 2005 emissions reductions were calculated in a similar fashion with their respective growth factors and control efficiencies. A spreadsheet with calculations for this category follows this description.

The expected emission reductions for all equipment types for 2005 in tons per day are:

	2005 VOC	2005 NO_x
Baltimore	0.0	21.62

2005 NOx Emission HD Diesel Reductions										
Equipment Type	Equip Cat	Cat Type	Diesel NOx tpsd	4-Stroke NOx tpsd	2-Stroke NOx tpsd	Tier 1 HD Diesel NOx Reductions	Small Engine Emission Increases	Tier 2 HD Diesel NOx Reductions	Tier 1+2 HD Diesel NOx Reductions	
Trimmers/Edgers/Brush Cutters	1	1	0.0000	0.0000	0.0037	0.0000	-0.0036		0	0.0000
Lawn Mowers	1	2	0.0000	0.0479	0.0037	0.0000	-0.0505		0	0.0000
Leaf Blowers/Vacuums	1	3	0.0000	0.0000	0.0037	0.0000	-0.0036		0	0.0000
Rear Engine Riding Mowers	1	4	0.0000	0.0037	0.0000	0.0000	-0.0036		0	0.0000
Front Mowers	1	5	0.0000	0.0000	0.0000	0.0000	0.0000		0	0.0000
Chainsaws <4HP	1	6	0.0000	0.0000	0.0046	0.0000	-0.0045		0	0.0000
Shredders <5HP	1	7	0.0000	0.0000	0.0000	0.0000	0.0000		0	0.0000
Tillers <5HP	1	8	0.0000	0.0037	0.0000	0.0000	-0.0036		0	0.0000
Lawn & Garden Tractors	1	9	0.0700	0.0516	0.0000	0.0000	-0.0505	0.0142512		0.0143
Wood Splitters	1	10	0.0000	0.0000	0.0000	0.0000	0.0000		0	0.0000
Snowblowers	1	11	0.0000	0.0000	0.0000	0.0000	0.0000		0	0.0000
Chippers/Stump Grinders	1	12	0.0773	0.0147	0.0000	0.0182	0.0000	0.005738		0.0239
Commercial Turf Equip.	1	13	0.0000	0.0700	0.0000	0.0000	-0.0685		0	0.0000
Other Lawn & Garden Equip.	1	14	0.0000	0.0000	0.0000	0.0000	0.0000		0	0.0000
Aircraft Support Equip.	2	1	0.6200	0.0218	0.0000	0.1457	0.0000	0.0460076		0.1917
Terminal Tractors	2	2	7.7719	0.1528	0.0087	1.8264	0.0000	0.5767153		2.4031
All Terrain Vehicles	3	1	0.0000	0.0000	0.0000	0.0000	0.0000		0	0.0000
Minibikes	3	2	0.0000	0.0000	0.0000	0.0000	0.0000		0	0.0000
Off-Road Motorcycles	3	3	0.0000	0.0000	0.0000	0.0000	0.0000		0	0.0000
Golf Carts	3	4	0.0000	0.0000	0.0000	0.0000	0.0000		0	0.0000
Snowmobiles	3	5	0.0000	0.0000	0.0000	0.0000	0.0000		0	0.0000
Specialty Vehicle Carts	3	6	0.0000	0.0000	0.0000	0.0000	0.0000		0	0.0000
Vessels w/Inboard Engines	4	1	0.2981	0.2768	0.0000	0.0000	0.0000	n/a		0.0000
Vessels w/Outboard Engines	4	2	0.0000	0.0043	0.0681	0.0000	-0.0709	n/a		0.0000
Vessels w/Sternboard Engines	4	3	0.0000	0.4514	0.0000	0.0000	0.0000	n/a		0.0000
Sailboat Auxiliary Inboard Engines	4	4	0.0170	0.0000	0.0000	0.0000	0.0000	n/a		0.0000
Sailboat Auxiliary Outboard Engines	4	5	0.0000	0.0000	0.0000	0.0000	0.0000	n/a		0.0000
Generator Sets <50 HP	5	1	0.2945	0.0668	0.0000	0.0000	-0.0654	0.0599938		0.0600
Pumps <50 HP	5	2	0.0903	0.0118	0.0079	0.0000	-0.0192	0.0183981		0.0184
Air Compressors <50 HP	5	3	0.0432	0.0079	0.0000	0.0000	-0.0077	0.0087991		0.0088
Gas Compressors <50 HP	5	4	0.0000	0.0000	0.0118	0.0000	0.0000		0	0.0000
Welders <50 HP	5	5	0.1846	0.0118	0.0000	0.0000	-0.0115	0.0375961		0.0376
Pressure Washers <50 HP	5	6	0.0000	0.0039	0.0000	0.0000	-0.0038		0	0.0000
Aerial Lifts	6	1	0.0977	0.0639	0.0300	0.0000	0.0000	0.0198923		0.0199
Forklifts	6	2	1.3446	0.3869	1.6714	0.3160	0.0000	0.0997784		0.4158
Sweepers/Scrubbers	6	3	1.0254	0.0300	0.0563	0.2410	0.0000	0.076088		0.3171
Other Industrial Equip.	6	4	0.2704	0.0188	0.0000	0.0636	-0.0184	0.0200672		0.0836
Other Material Handling Equip.	6	5	0.0488	0.0038	0.0000	0.0115	0.0000	0.0036232		0.0151
Asphalt Pavers	7	1	0.1954	0.0000	0.0000	0.0459	0.0000	0.0144991		0.0604
Tampers/Rammers	7	2	0.0000	0.0000	0.0000	0.0000	0.0000		0	0.0000
Plate Compactors	7	3	0.0000	0.0057	0.0000	0.0000	-0.0056		0	0.0000
Concrete Pavers	7	4	0.1092	0.0000	0.0000	0.0257	0.0000	0.0081024		0.0338
Rollers	7	5	0.4770	0.0057	0.0000	0.1121	-0.0056	0.0353948		0.1475
Scrapers	7	6	2.1148	0.0000	0.0000	0.4970	0.0000	0.1569311		0.6539
Paving Equipment	7	7	0.7241	0.0115	0.0000	0.1702	-0.0113	0.0537319		0.2239
Surfacing Equipment	7	8	0.0000	0.0057	0.0000	0.0000	-0.0056		0	0.0000
Signal Boards	7	9	0.0345	0.0000	0.0000	0.0000	0.0000	0.0070238		0.0070
Trenchers	7	10	0.4080	0.0230	0.0000	0.0959	0.0000	0.0831146		0.0831
Bore/Drill Rigs	7	11	0.2988	0.0115	0.0000	0.0702	0.0000	0.0221751		0.0924
Excavators	7	12	3.5286	0.0000	0.0000	0.8292	0.0000	0.2618362		1.0910
Concrete/Industrial Saws	7	13	0.0000	0.0230	0.0000	0.0000	-0.0225		0	0.0000
Cement and Mortar Mixers	7	14	0.0057	0.0057	0.0000	0.0000	-0.0056	0.0011706		0.0012
Cranes	7	15	3.3561	0.0057	0.0000	0.7887	0.0000	0.2490429		1.0377
Graders	7	16	1.6723	0.0000	0.0000	0.3930	0.0000	0.124095		0.5171
Off-Highway Trucks	7	17	5.4308	0.0000	0.0000	1.2762	0.0000	0.4029889		1.6792
Crushing/Proc. Equip.	7	18	0.3735	0.0057	0.0000	0.0878	0.0000	0.0277188		0.1155
Rough Terrain Forklifts	7	19	0.7011	0.0057	0.0000	0.1648	0.0000	0.0520261		0.2168
Rubber Tired Loaders	7	20	8.4363	0.0115	0.0000	1.9825	0.0000	0.6260187		2.6086
Rubber Tired Dozers	7	21	0.7298	0.0000	0.0000	0.1715	0.0000	0.0541583		0.2257
Tractors/Loaders/Backhoes	7	22	4.9768	0.0057	0.0000	1.1695	0.0000	0.3692999		1.5388
Crawler Tractors	7	23	12.6085	0.0000	0.0000	2.9630	0.0000	0.9356166		3.8986
Skid Steer Loaders	7	24	1.2873	0.0172	0.0000	0.0000	0.0000	0.2622208		0.2622
Off-Highway Tractors	7	25	3.1378	0.0000	0.0000	0.7374	0.0000	0.232838		0.9702
Dumpers/Tenders	7	26	0.0000	0.0000	0.0000	0.0000	0.0000		0	0.0000
Other Construction Equip.	7	27	0.3678	0.0057	0.0000	0.0864	0.0000	0.0272924		0.1137
2-Wheel Tractors	8	1	0.0000	0.0000	0.0000	0.0000	0.0000		0	0.0000
Agricultural Tractors	8	2	7.3644	0.0088	0.0000	1.7306	0.0000	0.5464741		2.2771
Agricultural Mowers	8	3	0.0000	0.0000	0.0000	0.0000	0.0000		0	0.0000
Combines	8	4	0.3989	0.0000	0.0000	0.0937	0.0000	0.0296007		0.1233
Sprayers	8	5	0.0044	0.0044	0.0000	0.0010	-0.0043	0.0003253		0.0014
Balers	8	6	0.0044	0.0000	0.0000	0.0010	0.0000	0.0003253		0.0014
Tillers >5HP	8	7	0.0000	0.0000	0.0000	0.0000	0.0000		0	0.0000
Swathers	8	8	0.0614	0.0044	0.0000	0.0144	0.0000	0.004554		0.0190
Hydro Power Units	8	9	0.0000	0.0000	0.0000	0.0000	0.0000		0	0.0000
Other Agricultural Equip.	8	10	0.0175	0.0000	0.0000	0.0041	0.0000	0.0013011		0.0054
Chainsaws >4HP	9	1	0.0000	0.0000	0.0000	0.0000	0.0000		0	0.0000
Shredders >5HP	9	2	0.0000	0.0000	0.0000	0.0000	0.0000		0	0.0000
Skidders	9	3	0.0000	0.0000	0.0000	0.0000	0.0000		0	0.0000
Fellers/Bunchers	9	4	0.0000	0.0000	0.0000	0.0000	0.0000		0	0.0000
Total						16.13	-0.45	5.58		21.62

6.3.3 Marine Engine Standards

This measure controls exhaust emissions from new spark-ignition (SI) gasoline marine engines, including outboard engines, personal watercraft engines, and jet boat engines. Of nonroad sources studied by EPA, gasoline marine engines were found to be one of the largest contributors of hydrocarbon (HC) emissions (30% of the nationwide nonroad total).

Control Strategy for Source Type

Once the program is fully implemented, manufacturers of these engines must demonstrate to EPA that hydrocarbon emissions are reduced by 75 percent from present levels, by testing engines representative of the product line before sale and after use. EPA is imposing emission standards for 2 – stroke technology, outboard and personal watercraft engines. This will involve increasingly stringent HC control over the course of a nine-year phase-in period beginning in model year 1998. By the end of the phase-in, each manufacturer must meet an HC and NO_x emission standard that represents a 75% reduction in HC compared to unregulated levels.

Each manufacturer is allowed to decide the type of control technologies to be applied to each engine type. However, there will be a pre-production certification program that requires all gasoline marine engine families to be certified by EPA as meeting applicable emissions standards before they are introduced into commerce. Manufacturers will comply by testing engines as they leave the production line, at appropriate sampling rates. Manufacturers will also have to test a portion of their fleet each year to determine if their engines are meeting emission standards while in use. These standards do not apply to any currently owned engines or boats.

Expected Emissions Reductions

The Code of Federal Register (40 CFR Parts 89, 90 and 91) rule entitled Control of Air Pollution; Final Rule for New Gasoline Spark-Ignition Marine Engines; Exemptions for New Nonroad Compression-Ignition Engines at or Above 37 Kilowatts and New Nonroad Spark-Ignition Engines at or Below 19 Kilowatts lists the projected inventory reductions for outboard/personal watercraft (OB/PWC) engines. These reduction percentages are listed in Table 3 of the document and are reproduced below.

TABLE 3. – PROJECTED INVENTORY REDUCTIONS

Year	Percent reduction in OB/PWC HC inventory
2000	4
2005	26
2010	52
2015	68
2020	73
2030	75

Linearly extrapolating the data between 2000 and 2005 yields a 2002 percent reduction in HC inventory of 12.8 percent. The expected emissions reductions by 2005 in tons per day are as follows:

	2005 VOC	2005 NO_x
Baltimore	1.794	-0.0709

6.3.4 Emissions standards for large spark ignition engines

This EPA measure controls VOC and NO_x emissions from several groups of previously unregulated nonroad engines, including large industrial spark-ignition engines, recreational vehicles, and diesel marine engines.

Description of Source Category

The new EPA requirements vary depending on the kind of engine or vehicle, taking into account environmental impacts, usage rates, the need for high performance models, costs and other factors. The emission standards apply to all new engines sold in the United States and any imported engines manufactured after these standards begin.

Controls on the category of large industrial spark-ignition engines are first required in 2004. Controls on the other engine categories are required beginning in years after 2005. Large industrial spark-ignition engines are those rated over 19 kW used in a variety of commercial applications; most use liquefied petroleum gas, with others operating on gasoline or natural gas.

EPA adopted two tiers of emission standards for Large SI engines. The first tier of standards, scheduled to start in 2004, are based on a simple laboratory measurement using steady-state procedures. The Tier 1 standards are the same as those adopted earlier by the California Air Resources Board for engines used in California. The Tier 2 standards starting in 2007

This program will be implemented by the EPA under 42 U.S.C. § 7547 (a).

Projected Reductions

Expected Emissions Reductions, Methodology and Sample Calculation

EPA's "Final Regulatory Support Document: Control of Emissions from Unregulated Nonroad Engines," (EPA420-R-02-022, September 2002), presents the emission reductions to be expected from the large industrial spark-ignition engine category in 2005. HC emissions will be reduced 24% and NO_x emissions reduced 21% in 2005. These reductions were applied to the appropriate category types in the nonroad inventory.

	2005 VOC	2005 NO_x
Baltimore	0.75	0.54

References

1990 Clean Air Act Amendments, 42 U.S.C. §7547 (a).

U.S. Environmental Protection Agency, "Control of Emissions From Nonroad Large Spark-Ignition Engines, and Recreational Engines (Marine and Land-Based)," Final Rule, 67 Federal Register

68241 (November 8, 2002).

U.S. Environmental Protection Agency, Final Regulatory Support Document: Control of Emissions from Unregulated Nonroad Engines,” EPA420-R-02-022, September 2002.

Large Spark Ignition Standard (LSIS) VOC Credits Calculation

LSIS Rule Coverage	Equipment Type	Equip Cat	Cat Type	2005 Emissions	2005 Emissions	2005 Emissions	2005 Emission
				Diesel VOC (tpsd)	4-Stroke VOC (tpsd)	2-Stroke VOC (tpsd)	Reductions (tpsd)
	Trimmers/Edgers/Brush Cutters	1	1	0	0	2.597089693	0
	Lawn Mowers	1	2	0	5.509104121	3.714836018	0
	Leaf Blowers/Vacuums	1	3	0	0	0.9042768	0
	Rear Engine Riding Mowers	1	4	0	0.184580537	0	0
	Front Mowers	1	5	0	0.067558391	0	0
	Chainsaws <4HP	1	6	0	0	3.659273129	0
	Shredders <5HP	1	7	0	0.014872473	0.003718118	0
	Tillers <5HP	1	8	0	0.479143045	0.011154354	0
	Lawn & Garden Tractors	1	9	0.011154354	1.69015112	0	0
	Wood Splitters	1	10	0	0.09382606	0	0
	Snowblowers	1	11	0	0.046924542	0.016561603	0
yes	Chippers/Stump Grinders	1	12	0.011154354	0.471144138	0	0.113074593
	Commercial Turf Equip.	1	13	0	1.85994445	0	0
	Other Lawn & Garden Equip.	1	14	0	0.024125396	0.037181181	0
yes	Aircraft Support Equip.	2	1	0.070136986	0.057809589	0	0.013874301
yes	Terminal Tractors	2	2	0.894246575	0.374472222	0.004383562	0.090925388
	All Terrain Vehicles	3	1	0	0.191399524	0.106117376	0
	Minibikes	3	2	0	0	0	0
	Off-Road Motorcycles	3	3	0	0.005444027	0.112823513	0
	Golf Carts	3	4	0	0.182214281	0.283089392	0
	Snowmobiles	3	5	0	0	0.031543822	0
	Specialty Vehicle Carts	3	6	0	0.014831031	0.11826754	0
	Vessels w/Inboard Engines	4	1	0.042385323	1.080995972	0	0
	Vessels w/Outboard Engines	4	2	0	0.004238532	6.870404538	0
	Vessels w/Sternboard Engines	4	3	0	1.289341163	0	0
	Sailboat Auxiliary Inboard Engines	4	4	0.012715597	0.00220815	0	0
	Sailboat Auxiliary Outboard Engines	4	5	0	0	0.025431194	0
	Generator Sets <50 HP	5	1	0.043214852	2.159214639	1.847131236	0
	Pumps <50 HP	5	2	0.011785869	0.454845635	0.039226844	0
	Air Compressors <50 HP	5	3	0.007857246	0.278554301	0	0
yes	Gas Compressors <50 HP	5	4	0	0	0.015714492	0.003771478
	Welders <50 HP	5	5	0.02750036	0.41314424	0	0
	Pressure Washers <50 HP	5	6	0	0.149906746	0	0
yes	Aerial Lifts	6	1	0.011265382	0.16097505	0.011265382	0.041337704
yes	Forklifts	6	2	0.15396022	0.994042135	0.664506027	0.398051559
yes	Sweepers/Scrubbers	6	3	0.120164074	0.078609961	0.023236024	0.024443036
	Other Industrial Equip.	6	4	0.030041018	0.048568943	0.101388437	0
yes	Other Material Handling Equip.	6	5	0.003755127	0.003755127	0	0.000901231
	Asphalt Pavers	7	1	0.011491571	0.005745785	0	0
	Tampers/Rammers	7	2	0	0	0.172373563	0
	Plate Compactors	7	3	0	0.053285826	0.280085326	0

Large Spark Ignition Standard (LSIS) VOC Credits Calculation

LSIS Rule Coverage	Equipment Type	Equip Cat	Cat Type	2005 Emissions	2005 Emissions	2005 Emissions	2005 Emission
				Diesel VOC (tpsd)	4-Stroke VOC (tpsd)	2-Stroke VOC (tpsd)	Reductions (tpsd)
yes	Concrete Pavers	7	4	0.011491571	0	0	0
	Rollers	7	5	0.040220498	0.084728622	0	0
	Scrapers	7	6	0.178119348	0	0	0
	Paving Equipment	7	7	0.068949425	0.145131539	0.172373563	0
	Surfacing Equipment	7	8	0	0.048795749	0	0
	Signal Boards	7	9	0.005745785	0	0	0
yes	Trenchers	7	10	0.06320364	0.06174548	0	0.014818915
yes	Bore/Drill Rigs	7	11	0.040220498	0.031963295	0.011491571	0.010429168
	Excavators	7	12	0.235577202	0	0	0
	Concrete/Industrial Saws	7	13	0	0.193811691	0	0
	Cement and Mortar Mixers	7	14	0	0.079300884	0	0
yes	Cranes	7	15	0.419442336	0.017237356	0	0.004136966
	Graders	7	16	0.2757977	0	0	0
	Off-Highway Trucks	7	17	0.488391761	0	0	0
yes	Crushing/Proc. Equip.	7	18	0.045966283	0.005745785	0	0.001378989
yes	Rough Terrain Forklifts	7	19	0.149390421	0.015981647	0	0.003835595
yes	Rubber Tired Loaders	7	20	0.706731607	0.017237356	0	0.004136966
	Rubber Tired Dozers	7	21	0.06320364	0	0	0
yes	Tractors/Loaders/Backhoes	7	22	0.706731607	0.005745785	0	0.001378989
	Crawler Tractors	7	23	1.578632831	0	0	0
yes	Skid Steer Loaders	7	24	0.287289271	0.044710574	0	0.010730538
	Off-Highway Tractors	7	25	0.660765323	0	0	0
	Dumpers/Tenders	7	26	0	0.005745785	0	0
yes	Other Construction Equip.	7	27	0.045966283	0.021727433	0	0.005214584
	2-Wheel Tractors	8	1	0	0	0	0
yes	Agricultural Tractors	8	2	1.490410959	0.017534247	0	0.004208219
	Agricultural Mowers	8	3	0	0	0	0
yes	Combines	8	4	0.043835616	0	0	0
	Sprayers	8	5	0	0.008767123	0	0
yes	Balers	8	6	0	0	0	0
	Tillers >5HP	8	7	0	0.116114428	0	0
yes	Swathers	8	8	0.004383562	0.02829281	0	0.006790274
	Hydro Power Units	8	9	0	0.004383562	0	0
yes	Other Agricultural Equip.	8	10	0.004383562	0	0	0
	Chainsaws >4HP	9	1	0	0	0.43937564	0
	Shredders >5HP	9	2	0	0	0	0
	Skidders	9	3	0	0	0	0
	Fellers/Bunchers	9	4	0	0	0	0
TOTAL							0.753438492

Large Spark Ignition Standard (LSIS) NOx Credits Calculation

LSIS Rule Coverage	Equipment Type	Equip Cat	Cat Type	2005 Emissions		2005 Emission	
				Diesel NOx (tpsd)	4-Stroke NOx (tpsd)	2-Stroke NOx (tpsd)	Reductions (tpsd)
	Trimmers/Edgers/Brush Cutters	1	1	0	0	0.003682192	0
	Lawn Mowers	1	2	0	0.047868493	0.003682192	0
	Leaf Blowers/Vacuums	1	3	0	0	0.003682192	0
	Rear Engine Riding Mowers	1	4	0	0.003682192	0	0
	Front Mowers	1	5	0	0	0	0
	Chainsaws <4HP	1	6	0	0	0.00460274	0
	Shredders <5HP	1	7	0	0	0	0
	Tillers <5HP	1	8	0	0.003682192	0	0
	Lawn & Garden Tractors	1	9	0.069961644	0.051550685	0	0
	Wood Splitters	1	10	0	0	0	0
	Snowblowers	1	11	0	0	0	0
yes	Chippers/Stump Grinders	1	12	0.077326027	0.014728767	0	0.003093041
	Commercial Turf Equip.	1	13	0	0.069961644	0	0
	Other Lawn & Garden Equip.	1	14	0	0	0	0
yes	Aircraft Support Equip.	2	1	0.620007129	0.021831237	0	0.00458456
yes	Terminal Tractors	2	2	7.771920354	0.152818659	0.008732495	0.033925742
	All Terrain Vehicles	3	1	0	0	0	0
	Minibikes	3	2	0	0	0	0
	Off-Road Motorcycles	3	3	0	0	0	0
	Golf Carts	3	4	0	0	0	0
	Snowmobiles	3	5	0	0	0	0
	Specialty Vehicle Carts	3	6	0	0	0	0
	Vessels w/Inboard Engines	4	1	0.298097439	0.276804765	0	0
	Vessels w/Outboard Engines	4	2	0	0.004258535	0.068136557	0
	Vessels w/Sternboard Engines	4	3	0	0.451404693	0	0
	Sailboat Auxiliary Inboard Engines	4	4	0.017034139	0	0	0
	Sailboat Auxiliary Outboard Engines	4	5	0	0	0	0
	Generator Sets <50 HP	5	1	0.294520548	0.066757991	0	0
	Pumps <50 HP	5	2	0.090319635	0.011780822	0.007853881	0
	Air Compressors <50 HP	5	3	0.043196347	0.007853881	0	0
yes	Gas Compressors <50 HP	5	4	0	0	0.011780822	0.002473973
	Welders <50 HP	5	5	0.18456621	0.011780822	0	0
	Pressure Washers <50 HP	5	6	0	0.003926941	0	0
yes	Aerial Lifts	6	1	0.097654854	0.063851251	0.030047647	0.019718769
yes	Forklifts	6	2	1.344632222	0.38686346	1.671400387	0.432235408
yes	Sweepers/Scrubbers	6	3	1.025375968	0.030047647	0.056339339	0.018141267
	Other Industrial Equip.	6	4	0.270428827	0.01877978	0	0
yes	Other Material Handling Equip.	6	5	0.048827427	0.003755956	0	0.000788751
	Asphalt Pavers	7	1	0.195392112	0	0	0
	Tampers/Rammers	7	2	0	0	0	0
	Plate Compactors	7	3	0	0.005746827	0	0

Large Spark Ignition Standard (LSIS) NOx Credits Calculation

LSIS Rule Coverage	Equipment Type	Equip Cat	Cat Type	2005 Emissions	2005 Emissions	2005 Emissions	2005 Emission	
				Diesel NOx (tpsd)	4-Stroke NOx (tpsd)	2-Stroke NOx (tpsd)	Reductions (tpsd)	
yes	Concrete Pavers	7	4	0.10918971	0	0	0	
	Rollers	7	5	0.476986627	0.005746827	0	0	
	Scrapers	7	6	2.114832273	0	0	0	
	Paving Equipment	7	7	0.72410018	0.011493654	0	0	
	Surfacing Equipment	7	8	0	0.005746827	0	0	
	Signal Boards	7	9	0.034480961	0	0	0	
yes	Trenchers	7	10	0.408024705	0.022987307	0	0.004827335	
yes	Bore/Drill Rigs	7	11	0.298834995	0.011493654	0	0.002413667	
	Excavators	7	12	3.528551673	0	0	0	
	Concrete/Industrial Saws	7	13	0	0.022987307	0	0	
	Cement and Mortar Mixers	7	14	0.005746827	0.005746827	0	0	
yes	Cranes	7	15	3.356146868	0.005746827	0	0.001206834	
	Graders	7	16	1.672326607	0	0	0	
	Off-Highway Trucks	7	17	5.430751354	0	0	0	
yes	Crushing/Proc. Equip.	7	18	0.373543744	0.005746827	0	0.001206834	
yes	Rough Terrain Forklifts	7	19	0.701112873	0.005746827	0	0.001206834	
yes	Rubber Tired Loaders	7	20	8.436341785	0.011493654	0	0.002413667	
	Rubber Tired Dozers	7	21	0.729847007	0	0	0	
yes	Tractors/Loaders/Backhoes	7	22	4.976752034	0.005746827	0	0.001206834	
	Crawler Tractors	7	23	12.60853806	0	0	0	
yes	Skid Steer Loaders	7	24	1.28728921	0.01724048	0	0.003620501	
	Off-Highway Tractors	7	25	3.137767449	0	0	0	
	Dumpers/Tenders	7	26	0	0	0	0	
yes	Other Construction Equip.	7	27	0.367796917	0.005746827	0	0.001206834	
	2-Wheel Tractors	8	1	0	0	0	0	
yes	Agricultural Tractors	8	2	7.364383562	0.008767123	0	0.001841096	
	Agricultural Mowers	8	3	0	0	0	0	
yes	Combines	8	4	0.39890411	0	0	0	
	Sprayers	8	5	0.004383562	0.004383562	0	0	
yes	Balers	8	6	0.004383562	0	0	0	
	Tillers >5HP	8	7	0	0	0	0	
yes	Swathers	8	8	0.061369863	0.004383562	0	0.000920548	
	Hydro Power Units	8	9	0	0	0	0	
yes	Other Agricultural Equip.	8	10	0.017534247	0	0	0	
	Chainsaws >4HP	9	1	0	0	0	0	
	Shredders >5HP	9	2	0	0	0	0	
	Skidders	9	3	0	0	0	0	
	Fellers/Bunchers	9	4	0	0	0	0	
TOTAL								0.537032492

6.3.5 Reformulated gasoline use in non-road motor vehicles and equipment

This federally mandated measure requires the use of lower polluting "reformulated" gasoline in the Baltimore Nonattainment Area. The measure involves taking credit for reductions due to the use of the federally reformulated gasoline in non-road mobile sources. Nonattainment areas classified as severe were required to opt in on the delivery of reformulated gasoline. Reformulated gasoline has been available in the Baltimore, MD ozone nonattainment area since 1995.

Description of Source Category

This measure affects the various non-road mobile sources that burn gasoline, such as small gasoline-powered engine equipment includes lawn mowers, trimmers, generators, compressors, etc. VOC emissions result from combustion and evaporation of gasoline used to power this equipment.

Control Strategy

Federal reformulated gasoline has been sold in the Baltimore Nonattainment Area since 1995.

Expected Emissions Reductions, Methodology and Sample Calculation

Refueling emissions for on-road sources are already calculated in the Baltimore, MD ozone nonattainment area's mobile source inventory.

In an August 18, 1993, memorandum, EPA's Office of Mobile Sources lists several factors for use in computing reduction credits for the use of reformulated gasoline in non-road equipment. Using the EPA memorandum, the emissions reduction factor is 3.324%, and the calculated emissions reductions therefore are as follows:

$$\begin{aligned}
 & \text{2005 Expected VOC Emissions Reductions (tons/day)} = \text{Uncontrolled 2005 non-road mobile source VOC emissions inventory} \times \text{0.03324 reduction factor} \times \text{Gasoline component of the non-road mobile sources VOC inventory} \\
 & \text{2005 Expected VOC Emissions Reductions (tons/day)} = 50.751677885 \times 0.03324 \times \frac{41.673998246}{50.751677885} \\
 & \text{2005 Expected VOC Emissions Reductions (tons/day)} = 1.3852
 \end{aligned}$$

The 1999 and 2002 emissions reductions were calculated in a similar fashion.

The expected emission reductions by 1999, 2002 and 2005 in tons per day are:

	2005 VOC	2005 NOx
Baltimore	1.3852	0.0

1999 VOC Emissions

Equipment Type	Equip Cat	Cat Type	Diesel VOC (tpds)	4-Stroke VOC (tpsd)	2-Stroke VOC (tpsd)
Trimmers/Edgers/Brush Cutters	1	1	0.0000	0.0000	2.4280
Lawn Mowers	1	2	0.0000	5.1504	3.4729
Leaf Blowers/Vacuums	1	3	0.0000	0.0000	0.8454
Rear Engine Riding Mowers	1	4	0.0000	0.1726	0.0000
Front Mowers	1	5	0.0000	0.0632	0.0000
Chainsaws <4HP	1	6	0.0000	0.0000	3.4210
Shredders <5HP	1	7	0.0000	0.0139	0.0035
Tillers <5HP	1	8	0.0000	0.4479	0.0104
Lawn & Garden Tractors	1	9	0.0104	1.5801	0.0000
Wood Splitters	1	10	0.0000	0.0877	0.0000
Snowblowers	1	11	0.0000	0.0439	0.0155
Chippers/Stump Grinders	1	12	0.0104	0.4405	0.0000
Commercial Turf Equip.	1	13	0.0000	1.7388	0.0000
Other Lawn & Garden Equip.	1	14	0.0000	0.0226	0.0348
Aircraft Support Equip.	2	1	0.0560	0.0461	0.0000
Terminal Tractors	2	2	0.7139	0.2989	0.0035
All Terrain Vehicles	3	1	0.0000	0.1789	0.0992
Minibikes	3	2	0.0000	0.0000	0.0000
Off-Road Motorcycles	3	3	0.0000	0.0051	0.1055
Golf Carts	3	4	0.0000	0.1703	0.2646
Snowmobiles	3	5	0.0000	0.0000	0.0295
Specialty Vehicle Carts	3	6	0.0000	0.0139	0.1105
Vessels w/Inboard Engines	4	1	0.0396	1.0106	0.0000
Vessels w/Outboard Engines	4	2	0.0000	0.0040	6.4233
Vessels w/Sternboard Engines	4	3	0.0000	1.2054	0.0000
Sailboat Auxiliary Inboard Engines	4	4	0.0119	0.0021	0.0000
Sailboat Auxiliary Outboard Engines	4	5	0.0000	0.0000	0.0238
Generator Sets <50 HP	5	1	0.0366	1.8311	1.5665
Pumps <50 HP	5	2	0.0100	0.3857	0.0333
Air Compressors <50 HP	5	3	0.0067	0.2362	0.0000
Gas Compressors <50 HP	5	4	0.0000	0.0000	0.0133
Welders <50 HP	5	5	0.0233	0.3504	0.0000
Pressure Washers <50 HP	5	6	0.0000	0.1271	0.0000
Aerial Lifts	6	1	0.0098	0.1394	0.0098
Forklifts	6	2	0.1333	0.8609	0.5755
Sweepers/Scrubbers	6	3	0.1041	0.0681	0.0201
Other Industrial Equip.	6	4	0.0260	0.0421	0.0878
Other Material Handling Equip.	6	5	0.0033	0.0033	0.0000
Asphalt Pavers	7	1	0.0100	0.0050	0.0000
Tampers/Rammers	7	2	0.0000	0.0000	0.1504
Plate Compactors	7	3	0.0000	0.0465	0.2444
Concrete Pavers	7	4	0.0100	0.0000	0.0000
Rollers	7	5	0.0351	0.0739	0.0000
Scrapers	7	6	0.1554	0.0000	0.0000
Paving Equipment	7	7	0.0602	0.1266	0.1504
Surfacing Equipment	7	8	0.0000	0.0426	0.0000
Signal Boards	7	9	0.0050	0.0000	0.0000
Trenchers	7	10	0.0552	0.0539	0.0000
Bore/Drill Rigs	7	11	0.0351	0.0279	0.0100
Excavators	7	12	0.2056	0.0000	0.0000
Concrete/Industrial Saws	7	13	0.0000	0.1691	0.0000
Cement and Mortar Mixers	7	14	0.0000	0.0692	0.0000
Cranes	7	15	0.3660	0.0150	0.0000
Graders	7	16	0.2407	0.0000	0.0000
Off-Highway Trucks	7	17	0.4262	0.0000	0.0000
Crushing/Proc. Equip.	7	18	0.0401	0.0050	0.0000
Rough Terrain Forklifts	7	19	0.1304	0.0139	0.0000
Rubber Tired Loaders	7	20	0.6167	0.0150	0.0000
Rubber Tired Dozers	7	21	0.0552	0.0000	0.0000
Tractors/Loaders/Backhoes	7	22	0.6167	0.0050	0.0000
Crawler Tractors	7	23	1.3776	0.0000	0.0000
Skid Steer Loaders	7	24	0.2507	0.0390	0.0000
Off-Highway Tractors	7	25	0.5766	0.0000	0.0000
Dumpers/Tenders	7	26	0.0000	0.0050	0.0000
Other Construction Equip.	7	27	0.0401	0.0190	0.0000
2-Wheel Tractors	8	1	0.0000	0.0000	0.0000
Agricultural Tractors	8	2	1.4904	0.0175	0.0000
Agricultural Mowers	8	3	0.0000	0.0000	0.0000
Combines	8	4	0.0438	0.0000	0.0000
Sprayers	8	5	0.0000	0.0088	0.0000
Balers	8	6	0.0000	0.0000	0.0000
Tillers >5HP	8	7	0.0000	0.1161	0.0000
Swathers	8	8	0.0044	0.0283	0.0000
Hydro Power Units	8	9	0.0000	0.0044	0.0000
Other Agricultural Equip.	8	10	0.0044	0.0000	0.0000
Chainsaws >4HP	9	1	0.0000	0.0000	0.3795
Shredders >5HP	9	2	0.0000	0.0000	0.0000
Skidders	9	3	0.0000	0.0000	0.0000
Fellers/Bunchers	9	4	0.0000	0.0000	0.0000
Total			8.0468	17.6480	20.5323

2002 VOC Emission

Equipment Type	Equip Cat	Cat Type	Diesel VOC (tpsd)	4-Stroke VOC (tpsd)	2-Stroke VOC (tpsd)
Trimmers/Edgers/Brush Cutters	1	1	0	0	2.516229924
Lawn Mowers	1	2	0	5.337579477	3.599175484
Leaf Blowers/Vacuums	1	3	0	0	0.876122358
Rear Engine Riding Mowers	1	4	0	0.178833666	0
Front Mowers	1	5	0	0.065454977	0
Chainsaws <4HP	1	6	0	0	3.545342532
Shredders <5HP	1	7	0	0.014409422	0.003602355
Tillers <5HP	1	8	0	0.46422504	0.010807066
Lawn & Garden Tractors	1	9	0.010807066	1.637528668	0
Wood Splitters	1	10	0	0.090904808	0
Snowblowers	1	11	0	0.045463558	0.016045962
Chippers/Stump Grinders	1	12	0.010807066	0.456475178	0
Commercial Turf Equip.	1	13	0	1.802035523	0
Other Lawn & Garden Equip.	1	14	0	0.023374257	0.036023554
Aircraft Support Equip.	2	1	0.062316314	0.051363492	0
Terminal Tractors	2	2	0.794533001	0.332716441	0.00389477
All Terrain Vehicles	3	1	0	0.186256351	0.103265853
Minibikes	3	2	0	0	0
Off-Road Motorcycles	3	3	0	0.005297738	0.109791787
Golf Carts	3	4	0	0.177317928	0.275482383
Snowmobiles	3	5	0	0	0.030696195
Specialty Vehicle Carts	3	6	0	0.014432501	0.115089525
Vessels w/Inboard Engines	4	1	0.041051424	1.046976189	0
Vessels w/Outboard Engines	4	2	0	0.004105142	6.654187568
Vessels w/Sternboard Engines	4	3	0	1.248764595	0
Sailboat Auxiliary Inboard Engines	4	4	0.012315427	0.002138658	0
Sailboat Auxiliary Outboard Engines	4	5	0	0	0.024630854
Generator Sets <50 HP	5	1	0.039772891	1.987238285	1.700011589
Pumps <50 HP	5	2	0.010847152	0.418618253	0.036102519
Air Compressors <50 HP	5	3	0.007231435	0.256368107	0
Gas Compressors <50 HP	5	4	0	0	0.01446287
Welders <50 HP	5	5	0.025310022	0.380238276	0
Pressure Washers <50 HP	5	6	0	0.137967027	0
Aerial Lifts	6	1	0.010494544	0.149960269	0.010494544
Forklifts	6	2	0.143425431	0.926024413	0.619036942
Sweepers/Scrubbers	6	3	0.1119418	0.073231044	0.02164609
Other Industrial Equip.	6	4	0.02798545	0.045245594	0.094450894
Other Material Handling Equip.	6	5	0.003498181	0.003498181	0
Asphalt Pavers	7	1	0.010733167	0.005366583	0
Tampers/Rammers	7	2	0	0	0.1609975
Plate Compactors	7	3	0	0.049769145	0.261600658
Concrete Pavers	7	4	0.010733167	0	0
Rollers	7	5	0.037566083	0.079136824	0
Scrapers	7	6	0.166364084	0	0
Paving Equipment	7	7	0.064399	0.135553357	0.1609975
Surfacing Equipment	7	8	0	0.045575398	0
Signal Boards	7	9	0.005366583	0	0
Trenchers	7	10	0.059032417	0.057670491	0
Bore/Drill Rigs	7	11	0.037566083	0.029853827	0.010733167
Excavators	7	12	0.220029917	0	0
Concrete/Industrial Saws	7	13	0	0.181020786	0
Cement and Mortar Mixers	7	14	0	0.074067299	0
Cranes	7	15	0.391760584	0.01609975	0
Graders	7	16	0.257596	0	0
Off-Highway Trucks	7	17	0.456159584	0	0
Crushing/Proc. Equip.	7	18	0.042932667	0.005366583	0
Rough Terrain Forklifts	7	19	0.139531167	0.014926914	0
Rubber Tired Loaders	7	20	0.660089751	0.01609975	0
Rubber Tired Dozers	7	21	0.059032417	0	0
Tractors/Loaders/Backhoes	7	22	0.660089751	0.005366583	0
Crawler Tractors	7	23	1.474448493	0	0
Skid Steer Loaders	7	24	0.268329167	0.04175983	0
Off-Highway Tractors	7	25	0.617157084	0	0
Dumpers/Tenders	7	26	0	0.005366583	0
Other Construction Equip.	7	27	0.042932667	0.020293497	0
2-Wheel Tractors	8	1	0	0	0
Agricultural Tractors	8	2	1.490410959	0.017534247	0
Agricultural Mowers	8	3	0	0	0
Combines	8	4	0.043835616	0	0
Sprayers	8	5	0	0.008767123	0
Balers	8	6	0	0	0
Tillers >5HP	8	7	0	0.116114428	0
Swathers	8	8	0.004383562	0.02829281	0
Hydro Power Units	8	9	0	0.004383562	0
Other Agricultural Equip.	8	10	0.004383562	0	0
Chainsaws >4HP	9	1	0	0	0.403860288
Shredders >5HP	9	2	0	0	0
Skidders	9	3	0	0	0
Fellers/Bunchers	9	4	0	0	0
TOTAL			8.537200736	18.52242843	21.41478273

2005 Nonroad Mobile VOC Emission

Equipment Type	Equip Cat	Cat Type	Diesel VOC (tpsd)	4 -Stroke VOC (tpsd)	2-Stroke VOC (tpsd)
Trimmers/Edgers/Brush Cutters	1	1	0.0000	0.0000	2.5971
Lawn Mowers	1	2	0.0000	5.5091	3.7148
Leaf Blowers/Vacuums	1	3	0.0000	0.0000	0.9043
Rear Engine Riding Mowers	1	4	0.0000	0.1846	0.0000
Front Mowers	1	5	0.0000	0.0676	0.0000
Chainsaws <4HP	1	6	0.0000	0.0000	3.6593
Shredders <5HP	1	7	0.0000	0.0149	0.0037
Tillers <5HP	1	8	0.0000	0.4791	0.0112
Lawn & Garden Tractors	1	9	0.0112	1.6902	0.0000
Wood Splitters	1	10	0.0000	0.0938	0.0000
Snowblowers	1	11	0.0000	0.0469	0.0166
Chippers/Stump Grinders	1	12	0.0112	0.4711	0.0000
Commercial Turf Equip.	1	13	0.0000	1.8599	0.0000
Other Lawn & Garden Equip.	1	14	0.0000	0.0241	0.0372
Aircraft Support Equip.	2	1	0.0701	0.0578	0.0000
Terminal Tractors	2	2	0.8942	0.3745	0.0044
All Terrain Vehicles	3	1	0.0000	0.1914	0.1061
Minibikes	3	2	0.0000	0.0000	0.0000
Off-Road Motorcycles	3	3	0.0000	0.0054	0.1128
Golf Carts	3	4	0.0000	0.1822	0.2831
Snowmobiles	3	5	0.0000	0.0000	0.0315
Specialty Vehicle Carts	3	6	0.0000	0.0148	0.1183
Vessels w/Inboard Engines	4	1	0.0424	1.0810	0.0000
Vessels w/Outboard Engines	4	2	0.0000	0.0042	6.8704
Vessels w/Sternboard Engines	4	3	0.0000	1.2893	0.0000
Sailboat Auxiliary Inboard Engines	4	4	0.0127	0.0022	0.0000
Sailboat Auxiliary Outboard Engines	4	5	0.0000	0.0000	0.0254
Generator Sets <50 HP	5	1	0.0432	2.1592	1.8471
Pumps <50 HP	5	2	0.0118	0.4548	0.0392
Air Compressors <50 HP	5	3	0.0079	0.2786	0.0000
Gas Compressors <50 HP	5	4	0.0000	0.0000	0.0157
Welders <50 HP	5	5	0.0275	0.4131	0.0000
Pressure Washers <50 HP	5	6	0.0000	0.1499	0.0000
Aerial Lifts	6	1	0.0113	0.1610	0.0113
Forklifts	6	2	0.1540	0.9940	0.6645
Sweepers/Scrubbers	6	3	0.1202	0.0786	0.0232
Other Industrial Equip.	6	4	0.0300	0.0486	0.1014
Other Material Handling Equip.	6	5	0.0038	0.0038	0.0000
Asphalt Pavers	7	1	0.0115	0.0057	0.0000
Tampers/Rammers	7	2	0.0000	0.0000	0.1724
Plate Compactors	7	3	0.0000	0.0533	0.2801
Concrete Pavers	7	4	0.0115	0.0000	0.0000
Rollers	7	5	0.0402	0.0847	0.0000
Scrapers	7	6	0.1781	0.0000	0.0000
Paving Equipment	7	7	0.0689	0.1451	0.1724
Surfacing Equipment	7	8	0.0000	0.0488	0.0000
Signal Boards	7	9	0.0057	0.0000	0.0000
Trenchers	7	10	0.0632	0.0617	0.0000
Bore/Drill Rigs	7	11	0.0402	0.0320	0.0115
Excavators	7	12	0.2356	0.0000	0.0000
Concrete/Industrial Saws	7	13	0.0000	0.1938	0.0000
Cement and Mortar Mixers	7	14	0.0000	0.0793	0.0000
Cranes	7	15	0.4194	0.0172	0.0000
Graders	7	16	0.2758	0.0000	0.0000
Off-Highway Trucks	7	17	0.4884	0.0000	0.0000
Crushing/Proc. Equip.	7	18	0.0460	0.0057	0.0000
Rough Terrain Forklifts	7	19	0.1494	0.0160	0.0000
Rubber Tired Loaders	7	20	0.7067	0.0172	0.0000
Rubber Tired Dozers	7	21	0.0632	0.0000	0.0000
Tractors/Loaders/Backhoes	7	22	0.7067	0.0057	0.0000
Crawler Tractors	7	23	1.5786	0.0000	0.0000
Skid Steer Loaders	7	24	0.2873	0.0447	0.0000
Off-Highway Tractors	7	25	0.6608	0.0000	0.0000
Dumpers/Tenders	7	26	0.0000	0.0057	0.0000
Other Construction Equip.	7	27	0.0460	0.0217	0.0000
2-Wheel Tractors	8	1	0.0000	0.0000	0.0000
Agricultural Tractors	8	2	1.4904	0.0175	0.0000
Agricultural Mowers	8	3	0.0000	0.0000	0.0000
Combines	8	4	0.0438	0.0000	0.0000
Sprayers	8	5	0.0000	0.0088	0.0000
Balers	8	6	0.0000	0.0000	0.0000
Tillers >5HP	8	7	0.0000	0.1161	0.0000
Swathers	8	8	0.0044	0.0283	0.0000
Hydro Power Units	8	9	0.0000	0.0044	0.0000
Other Agricultural Equip.	8	10	0.0044	0.0000	0.0000
Chainsaws >4HP	9	1	0.0000	0.0000	0.4394
Shredders >5HP	9	2	0.0000	0.0000	0.0000
Skidders	9	3	0.0000	0.0000	0.0000
Fellers/Bunchers	9	4	0.0000	0.0000	0.0000
TOTAL			9.0777	19.3997	22.2743

References

U.S. Environmental Protection Agency, "Regulation of Fuels and Fuel Additives: Standards for Reformulated Gasoline", Proposed Rule, 58 *Federal Register* 11722, February 26, 1993.

"VOC Emission Benefits for Non-Road Equipment with the Use of Federal Phase I Reformulated Gasoline", memorandum from Phil Lorang, U.S. EPA Office of Mobile Sources to Air Directors, EPA Regions 1-10, August 18, 1993.

6.3.6 Railroad Engine Standards

This measure establishes emission standards for oxides of nitrogen (NO_x), hydrocarbons (HC), carbon monoxide (CO), particulate matter (PM) and smoke for newly manufactured and remanufactured diesel-powered locomotives and locomotive engines, which have previously been unregulated.

Control Strategy for Source Type

This regulation will take effect in 2000 and will affect railroad manufacturers and locomotive re-manufacturers. It involves adoption of three separate sets of emission standards with applicability dependent on the date a locomotive is first manufactured. The first set of standards (Tier 0) applies to locomotives originally manufactured from 1973 through 2000. The second set of standards (Tier 1) applies to locomotives and locomotive engines manufactured from 2002 through 2004. The final set of standards (Tier 2) apply to locomotives and locomotive engines originally manufactured in 2005 and later. Locomotives and locomotive engines will be required to meet the Tier 1 standards at original manufacture and at each subsequent remanufacture.

EPA has adopted a production line testing (PLT) program that requires manufacturers, and in some cases, re-manufacturers of locomotives to perform production line testing of newly manufactured and remanufactured locomotives as they leave the point where the manufacture or remanufacture is completed. EPA is also planning to adopt an in-use-testing program to ensure that locomotives continue to meet emission standards during actual operation. EPA has also adopted averaging, banking and trading (ABT) provisions to allow manufacturers and re-manufacturers the flexibility to meet overall emissions goals at the lowest cost, while allowing EPA to set emissions standards at levels more stringent than they would be if each and every engine family had to comply with the standards.

Expected Emissions Reductions, Methodology and Sample Calculation

According to the EPA⁵, the regulation should result in NO_x emissions reductions of 23.9 % by 2002 and 41.8 % by 2005.

The following is a sample calculation of 2002 emissions reductions for the Baltimore nonattainment area for railroad locomotives:

1990 Emissions (Tons per day) * BEA Growth Factor * Expected Emissions Reductions (Percentage) = Expected Emissions Reduction in 2002 (Tons per day)

10.58 Tons per day * 0.956 * 0.239 = 2.425 Tons per day

The 1999 and 2005 emissions reductions were calculated in a similar fashion with their respective growth factors. The expected emissions reductions by 1999, 2002 and 2005 in tons per day are:

	2005 VOC	2005 NO _x
Baltimore	0.00	4.20

⁵ Memorandum from Philip A. Lorang, Director Emission Planning and Strategies Division, dated January 12, 1995

6.4 Point Source Measures

6.4.1 Expandable Polystyrene Products

This measure requires RACT to be installed at operations that manufacture foam cups, foam insulation and other foam products.

Description of Source Type

These sources use expandable polystyrene beads that contain pentane, a VOC, to manufacture foam products such as foam cups, board insulation, and custom shapes.

There are three different stages of operation during which VOC emissions typically occur: storage and pre-expansion of the beads, manufacturing the product, and aging emissions that occur because of the slow diffusion of the blowing agent (pentane) from the foam before shipping.

Control Strategy for Source Type

COMAR 26.11.19.19 requires VOC emissions reductions that has the following general requirements:

- A person who owns or operates an expandable polystyrene operation (EPO) subject to this regulation may not cause or permit the discharge of VOC into the atmosphere unless one of the following control measures is implemented:
 - A VOC collection and destruction system to control emissions from the pre-expander by 85 percent or more overall; or
 - A VOC collection system that ducts emissions from the pre-expander into the firebox of fuel burning equipment.
- As an alternative to meeting the above requirements in of this regulation, the following manufacturing requirements may be implemented:
 - Manufacturers of block products using reduced VOC content beads that have a bead VOC content greater than 6.5 percent shall use 10 percent or more recycled expanded polystyrene;
 - Manufacturers of block products that cannot use recycled expanded polystyrene shall use beads with a VOC content of 6.5 percent or less;
 - Manufacturers of shape molded products, including cups, shall use beads with a VOC content of 6 percent or less; and
 - Manufacturers of specialty products shall use reduced VOC content beads.
- Compliance with the bead VOC content for each product in §C(2) of this regulation shall be determined as a daily average.

This regulation became effective on July 3, 1995 and was submitted to the EPA on July 12, 1995.

Rule Effectiveness

The control requirement involves the use of a reformulation and the emissions are calculated by means of direct determination. EPA guidance on rule effectiveness (RE) states that RE is not required for sources for which emissions are calculated by means of a direct determination (Guidelines for Estimating and Applying Rule Effectiveness for Ozone/CO SIP Base Year Inventories, EPA-454/R-92-010). However, EPA Region 3 has recommended the application of rule effectiveness to this source category.

Expected Emissions Reductions, Methodology and Sample Calculation

The sources subject to this measure are located in the Baltimore nonattainment area. The 1990 base year emissions estimate using EPA published emission factors for this category was 0.34 tons per day (MDE, 1993). This figure is the total of the estimates for the polystyrene blowing operations in the Baltimore nonattainment area. The proposed measure results in a 30 percent reduction in VOC emissions.

The 2002 emissions reductions were calculated as follows:

$$1990 \text{ Emissions (Tons per day)} * \text{BEA Growth Factor} * \text{Expected Emissions Reduction (Percentage)} * \text{Rule Effectiveness} = \text{Expected Emissions Reduction in 2002 (Tons per day)}$$

$$0.34 \text{ Tons per day} * 1.15 * 0.30 * 0.80 = 0.0938 \text{ Tons per day}$$

The 1999 and 2005 emissions reductions were calculated in a similar fashion except BEA projection factors of 1.083 and 1.205 were used, respectively.

The expected emissions reductions by 1999, 2002 and 2005 in tons per day are:

	2005 VOC	2005 NOx
Baltimore	0.0983	0.0

6.4.2 Yeast Manufacturing

This measure requires RACT to be installed at two yeast-manufacturing operations in the Baltimore nonattainment area.

Description of Source Type

Yeast is produced using an aerated fermentation process under controlled conditions. The principal raw materials used in producing baker's yeast are the pure yeast culture and molasses. A variety of essential nutrients and vitamins are also required in yeast production. Most vitamins and nutrients are available in sufficient amounts in the molasses malt but others must be added. Yeast is grown through several stages of batch fermentation. Of particular interest in the formation of VOCs are the three stages known as stock fermentation (STOCK), first generation fermentation (1st Generation), and trade fermentation (TRADE). Together these steps form the three-step process for producing liquid yeast, and each of the three fermentations is approximately 12-24 hours in length.

As part of the process, air is introduced into the fermenters at a controlled rate and other VOCs (including ethanol and acetaldehyde) generated as a function of the biological activity are released to the atmosphere through a vent stack attached to each fermenter.

Control Strategy for Source Type

The ethanol production rate is a function of the yeast growth rate, and both of these parameters are related to residual sugar concentration. By continuously adding only the exact amount of molasses required by the fermentation, conditions of excess sugar can be eliminated, thus minimizing ethanol formation.

COMAR 26.11.19.17 requires the use of improved process control techniques to obtain VOC emission reductions. This regulation became effective on June 5, 1995, was submitted to the EPA on July 12, 1995, and is now part of Maryland's SIP. The regulation obtains an overall emission reduction of approximately 60 to 70 percent from the 1990 baseline by requiring affected sources to meet specific VOC emission standards.

The improved process control techniques involve the use of a continuous monitoring system and feedback controls. In such a system, process parameters (including VOCs in the fermenter stack gases) are monitored, and the output data sent to a computer. The computer is then used to calculate sugar consumption rates through material balance techniques. Based on the calculated data, the computer continuously controls the addition of molasses that indirectly controls the generation of ethanol in the fermenters. These types of enhanced process controls allow manufacturers to produce good quality yeast with high yields and low VOC production.

Determination of compliance with COMAR 26.11.19.17 is determined with the use of continuous process monitors and stack testing. A stack test to correlate emissions concentrations with data from the continuous process monitors is made for each installation. Emission concentrations are based on a fermentation batch average using the results of the analysis of at least four effluent samples per hour for the duration of the batch.

Rule Effectiveness

The 15% RPP did not include rule effectiveness (RE) in the emissions calculation. Emissions are calculated by means of a direct determination and the use of a continuous facility monitor. EPA guidance on rule effectiveness states that RE is not required for sources for which emissions are calculated by means of a direct determination using some type of continuous emission monitoring equipment (Guidelines for Estimating and Applying Rule Effectiveness for Ozone/CO SIP Base Year Inventories, EPA-454/R-92-010).

Expected Emissions Reductions, Methodology, and Sample Calculations

The 1990 base year emissions estimate using EPA published emission factors for this category was 0.976 tons per day. This represents 0.778 tons per day of VOC emitted by Red Star Yeast and 0.198 tons per day emitted by American Yeast.

The 2002 emission reductions were calculated as follows:

$$1990 \text{ Emissions (Tons Per Day)} * \text{BEA Growth Factor} * \text{Expected Control Efficiency (Percent)} \\ = \text{Expected Emission Reductions in 2002 (Tons Per Day)}$$

$$0.976 \text{ Tons Per Day} * 1.263 * 0.66 = 0.8136 \text{ Tons Per Day}$$

The calculation for the 1999 and 2005 reductions are similar except for a growth factor of 1.166 and 1.349, respectively.

The expected emissions reductions by 1999, 2002 and 2005 in tons per day are as follows:

	2005 VOC	2005 NO_x
Baltimore	0.869	0.0

6.4.3 Commercial Bakery Ovens

This measure requires commercial bakeries using yeast to leaven bread and bread products to install RACT.

Description of Source Type

Commercial bakeries generate VOC emissions from the fermentation and baking processes used to produce yeast-raised baked goods. These emissions are primarily ethanol. VOC resulting from the fermentation and baking are currently discharged directly into the air.

Control Strategy for Source Type

The regulation requires control equipment dependent upon thresholds that are based on cost effectiveness criteria. The finalized regulation requires 80% control efficiency, with a rule effectiveness of 80%.

This regulation, COMAR 26.11.19.21, became effective on July 3, 1995 and was submitted to the EPA on July 12, 1995.

In the Baltimore Area, the 1990 base year emissions estimate using stack test data and EPA approved emission factors for this category was 0.72 tons per day (MDE 1993). The 1996 projected emissions were 0.74 tons per day.

Five point sources were identified within the Baltimore Nonattainment Area as bakeries. These are H&S Bakery, Hauswald Bakery, Crispy Bagel, Automatic Rolls, and Schmidt Bakery. Of these five sources the proposed Bakery RACT applies to Schmidt Bakery and Automatic Rolls. Schmidt Bakery has installed a Humidification/Conditioner innovative control technology device and Automatic Rolls has installed a Catalytic Afterburner control device.

For the 66 year old Hauswald's bakery oven, a detailed cost analysis was conducted to determine the economic impact. Control costs in terms of capital investment at this facility exceed the value of the existing production equipment. The cost effectiveness is \$4,198 per ton of VOC reduced. Since the age of the equipment and condition is such that the high capital expenditure of \$853,528 along with high operating costs cannot be justified, the oven has been exempted from control requirements until it is replaced.

The 2002 emission reductions were calculated as follows:

Expected total emission reductions for 2002 = Schmidt Bakery Reduction + Automatic Rolls Reduction

Expected total emission reductions for 2002 = 1990 Emissions (Tons per Day) x BEA Growth Factor x Control Efficiency (Percent) x Rule Effectiveness (Percent)

Schmidt Bakery

$0.8755 \text{ Tons per Day} * 1.064 * 0.8 * 0.8 = 0.596 \text{ Tons per Day}$

Automatic Rolls

$0.1595 \text{ Tons per Day} * 1.064 * 0.8 * 0.8 = 0.109 \text{ Tons per Day}$

Expected total emission reductions for 2002 = $0.596 + 0.109$

Expected total emission reductions for 2002 = 0.705

The expected emission reductions for 1999 and 2005 are calculated similarly except for the change in BEA growth factor to 1.0307 and 1.089.

	2005 VOC	2005 NO_x
Baltimore	0.7213	0.0

6.4.4 Federal Air Toxics

This measure covers sources that are required to comply with Federal air toxics requirements that have or will achieve VOC reduction between 1990 and 1996.

Control Strategy

The Department has delegation to implement Federal air toxics rules that will achieve VOC emissions reductions creditable towards the RPP and adopts rules as EPA promulgates them. Federal rules that may achieve such reductions include Federal NESHAPs for vinyl chloride production plants and benzene emissions from equipment leaks, benzene storage vessels, coke by-product recovery plants, benzene transfer operations and waste operations.

In addition this measure could include reductions from Maximum Achievable Control Technology (MACT) standards scheduled for completion in November of 1992 and 1994 with full implementation required in November of 1995 and 1997 respectively. Source categories covered by the 1992 MACT standards include the Hazardous Organic NESHAP (HON), coke ovens, dry cleaners, and chromium electroplating.

Federal Air Toxics Requirements

The Department has delegation to implement Federal air toxics rules that will achieve VOC emissions reductions creditable towards the Rate of Progress Plan and has adopted by reference the following rules as EPA has promulgated them.

NESHAP for Coke Oven Batteries

Benzene NESHAP

The Final Rule for the NESHAP is for organic hazardous air pollutants from the synthetic organic chemical manufacturing industry (SOCMI). As of September 1, 1993, the one premise in Maryland that was covered by this regulation ceased from using benzene in its processes.

The expected emission reductions by 1999, 2002, and 2005 in tons per day are the following:

	2005 VOC	2005 NO_x
Baltimore	0.5	0.0

6.4.5 Enhanced Rule Compliance

This measure involves enhancing rule compliance by increasing or in other ways improving the enforcement of existing regulations.

Description of Sources Covered

Enhanced rule compliance or rule effectiveness reflects the ability of a regulatory program to achieve all the emission reductions that could have been achieved by *full compliance* with the applicable regulations at *all sources* at *all times*.

This control measure covers the specific sources and source categories listed in Table 6.5. These sources and source categories have been determined by the Department to be areas in which rule effectiveness can be improved.

Control Strategy

Enhanced Rule Compliance or rule effectiveness (RE) improvement refers to an improvement in the implementation of and compliance with a regulation. These RE improvements may take several forms, ranging from more frequent and in-depth training of inspectors to larger fines for sources that do not comply with a given rule. RE improvements are important control strategies in areas that have already adopted RACT for many of their larger sources prior to 1990.

The purpose of a RE improvement is to give state and local agencies additional means for achieving actual reductions for their State Implementation Plans (SIPs). Title I of the Clean Air Act identifies RE improvements as one of the measures that can be used to meet the 15-percent volatile organic compound (VOC) reduction requirements by November 15, 1996.

To estimate the creditable emission reduction from enhanced rule compliance, and to determine an appropriate RE value, the Department used the EPA developed methodology (matrix method) to quantify the predicted improvement. The RE value was calculated to be 92% for the source categories affected by the regulation. This yields a RE improvement of 12% over the 80% default value. Other source categories listed in the RPP and Stage I vapor recovery yield RE improvements of 7%. This corresponds to a total emission reduction of 4.5 tons per day.

Expected Emission Reductions

To estimate creditable emissions reductions from RE improvements, state and local agencies require a methodology to quantify the predicted RE increase. The methodology must measure the impact of specific improvement measures available to a state or local agency. In the absence of any compliance or emissions data to quantitatively assess RE improvement measures, EPA's Ozone/Carbon Monoxide Programs branch developed a RE matrix. The RE matrix is based on a questionnaire that EPA used to estimate base rule effectiveness for source categories. The following principles guided the development of the matrix:

- ❖ All state and local agencies should be guaranteed at least 80 percent base RE;
- ❖ State and local agencies with an RE well above the 80-percent default should receive

more emissions reduction credits for an RE improvement than agencies near the 80-percent default;

- ❖ RE improvements should be documented in a permit or in a SIP revision; and,
- ❖ One-hundred-percent RE is achieved in cases of direct determination of emissions or elimination of VOCs or other pollutants through an irreversible process change.

The matrix is divided into 13 categories representing the range of activities and conditions that influence rule effectiveness. The 13 categories are:

- Training of Plant Operators
- Inspector Training
- Educational Opportunities for Source
- Procedures for Operation and Maintenance of Control and/or Process Equipment
- Clarity of Testing Procedures and Schedules
- Rule Effectiveness Evaluation Program
- Monitoring
- Type of Inspection
- Administrative Authority-Prison
- Administrative Authority-Fines
- Administrative Authority-Citations
- Media Publication of Enforcement Action
- Follow-up Inspections

The matrix includes subcategories for six of these categories. Control measures, which are the most specific item in the matrix, are arranged in descending order, with the first measure having the most significant impact on RE.

The table following shows the expected emission reductions through 2005.

Implementation Schedule

Since 1990, MDE has obtained the authority to impose administrative penalties of up to \$2,500 per day per violation and civil penalties of up to \$25,000 per day per violation. MDE also has the authority to pursue criminal penalties of up to \$25,000 and one year in jail for a first offense, and up to \$50,000 and two years in jail for subsequent offenses.

Enhanced monitoring of sources has also increased since 1990. Several sources are equipped with telemetry and can be evaluated from the office continuously. These sources also submit quarterly compliance summaries.

MDE has also held workshops for regulated sources on new regulatory requirements. By 1996, many Title V permits will include the requirement that equipment operators follow and sign daily operation and maintenance instructions. The permits will also include specific stack testing requirements including, approved stack testing methods as well as the required frequency of the testing. In addition, by 1996, there will be in place increased inspector training and frequency of inspections, as well as, mandatory follow-up of violations within 30 days.

The expected emission reductions in tons per day are the following:

	2005 VOC	2005 NO_x
Baltimore	5.1	0.0

1999 Rule Effectiveness Benefits

Company	1990 Controlled	CE	1990 Uncontrolled	Adj. 1990	SIC Expan.	1999 Uncontrolled	RE 1999	1999 Adj. Emis. Rate		Oper. Days	1999 Emis. Red (TPY)	1999 Emis. Red. lb/day	1999 Emis. Red. ton/day
								RE=80	RE=RE 1999				
Thomas Manuf.	5	0.9800	250	54	1.128700	282	0.870	61	42	207	2.0	19.4	0.0
Parker Metal	94	0.9000	940	263	1.117600	1051	0.870	294	228	218	7.2	66.2	0.0
Chesapeake Metals	119	0.9500	2380	571	1.316100	3132	0.870	752	543	300	31.2	208.3	0.1
FMC	4	0.9999	40000	8003	1.088200	43528	0.920	8709	3486	350	914.0	5222.8	2.6
GM	443	0.1250	506	456	1.151900	583	0.870	525	520	223	0.6	5.1	0.0
GAF	184	0.8620	1333	414	1.000000	1333	0.870	414	333	365	14.7	80.5	0.0
Fleischman's	19	0.9500	380	91	1.092800	415	0.870	100	72	300	4.1	27.6	0.0
Vista	6	0.9900	550	114	1.090700	600	0.920	125	54	325	11.6	71.3	0.0
US Can	153	0.9500	3060	734	1.114300	3410	0.870	818	592	300	34.0	226.7	0.1
Petroleum F&T	20	0.9000	200	56	1.085000	217	0.920	61	37	365	4.3	23.4	0.0
Amerada Hess	12	0.9950	2400	490	1.190000	2856	0.920	583	242	365	62.2	341.0	0.2
Louis Dreyfus	43	0.7500	172	69	1.182500	203	0.920	81	63	365	3.3	18.3	0.0
Shell	69	0.9750	2760	607	1.189700	3284	0.920	722	338	365	70.1	384.2	0.2
BP	212	0.7100	731	316	1.190700	870	0.920	376	302	365	13.5	74.2	0.0
Mobil	158	0.9000	1580	442	1.191000	1882	0.920	527	324	365	37.1	203.2	0.1
Chevron	35	0.9730	1296	287	1.189100	1541	0.920	342	162	365	32.8	180.0	0.1
Conoco-Sun	37	0.9900	3700	770	1.190300	4404	0.920	916	393	365	95.5	523.2	0.3
Star	146	0.6820	459	209	1.187800	545	0.920	248	203	365	8.1	44.6	0.0
Exxon	111	0.9450	2018	492	1.189700	2401	0.920	586	314	365	49.7	272.3	0.1
Crown	44	0.9900	4400	915	1.190700	5239	0.920	1090	467	365	113.6	622.4	0.3
Amoco	51	0.9900	5100	1061	1.189800	6068	0.920	1262	541	365	131.6	720.9	0.4
TOTAL											1641.3	9335.6	4.7

2002 Inventory for Rule Effectiveness

Company	1990 Controlled	CE	1990 Uncontrolled	Adj. 1990	SIC Expan.	2002 Uncontrolled	RE 2002	2002 Adj. Emis. Rate		Oper. Days	2002 Emis. Red (TPY)	2002 Emis. Red. lb/day	2002 Emis. Red. ton/day
								RE=80	RE=RE 2002				
Thomas Manuf.	5	0.9800	250	54	1.173000	293	0.870	63	43	207	2.1	20.1	0.0
Parker Metal	94	0.9000	940	263	1.203800	1132	0.870	317	246	218	7.8	71.3	0.0
Chesapeake Metals	119	0.9500	2380	571	1.518700	3615	0.870	867	627	300	36.1	240.4	0.1
FMC	4	0.9999	40000	8003	1.101002	44040	0.920	8812	3527	350	924.7	5284.3	2.6
GM	443	0.1250	506	456	1.221021	618	0.870	556	551	223	0.6	5.4	0.0
GAF	184	0.8620	1333	414	1.000000	1333	0.870	414	333	365	14.7	80.5	0.0
Fleischman's	19	0.9500	380	91	1.145269	435	0.870	104	76	300	4.3	28.9	0.0
Vista	6	0.9900	550	114	1.138638	626	0.920	130	56	325	12.1	74.4	0.0
US Can	153	0.9500	3060	734	1.203800	3684	0.870	884	639	300	36.7	245.0	0.1
Petroleum F&T	20	0.9000	200	56	1.287300	257	0.920	72	44	365	5.1	27.8	0.0
Amerada Hess	12	0.9950	2400	490	1.287300	3090	0.920	630	261	365	67.3	368.9	0.2
Louis Dreyfus	43	0.7500	172	69	1.287300	221	0.920	89	69	365	3.6	19.9	0.0
Shell	69	0.9750	2760	607	1.287300	3553	0.920	782	366	365	75.9	415.7	0.2
BP	212	0.7100	731	316	1.287300	941	0.920	407	326	365	14.6	80.2	0.0
Mobil	158	0.9000	1580	442	1.287300	2034	0.920	570	350	365	40.1	219.7	0.1
Chevron	35	0.9730	1296	287	1.287300	1669	0.920	370	175	365	35.6	194.8	0.1
Conoco-Sun	37	0.9900	3700	770	1.287300	4763	0.920	991	425	365	103.3	565.8	0.3
Star	146	0.6820	459	209	1.287300	591	0.920	269	220	365	8.8	48.4	0.0
Exxon	111	0.9450	2018	492	1.287300	2598	0.920	634	339	365	53.8	294.6	0.1
Crown	44	0.9900	4400	915	1.287300	5664	0.920	1178	505	365	122.8	672.9	0.3
Amoco	51	0.9900	5100	1061	1.287300	6565	0.920	1366	586	365	142.3	779.9	0.4
TOTAL											1712.3	9738.9	4.9

2005 Inventory for Rule Effectiveness

Company	1990 Controlled	CE	1990 Uncontrolled	Adj. 1990	SIC Expan.	1999 Uncontrolled	RE 1999	2005 Adj. Emis. Rate		Oper. Days	2005 Emis. Red (TPY)	2005 Emis. Red. lb/day	2005 Emis. Red. ton/day
								RE=80	RE=RE 2005				
Thomas Manuf.	5	0.9800	250	54	1.202400	301	0.870	65	44	207	2.1	20.6	0.0
Parker Metal	94	0.9000	940	263	1.276000	1199	0.870	336	260	218	8.2	75.6	0.0
Chesapeake Metals	119	0.9500	2380	571	1.712100	4075	0.870	978	707	300	40.6	271.0	0.1
FMC	4	0.9999	40000	8003	1.113506	44540	0.920	8912	3567	350	935.3	5344.3	2.7
GM	443	0.1250	506	456	1.274560	645	0.870	581	575	223	0.6	5.6	0.0
GAF	184	0.8620	1333	414	1.000000	1333	0.870	414	333	365	14.7	80.5	0.0
Fleischman's	19	0.9500	380	91	1.177928	448	0.870	107	78	300	4.5	29.8	0.0
Vista	6	0.9900	550	114	1.168290	643	0.920	134	57	325	12.4	76.3	0.0
US Can	153	0.9500	3060	734	1.276000	3905	0.870	937	677	300	38.9	259.7	0.1
Petroleum F&T	20	0.9000	200	56	1.377300	275	0.920	77	47	365	5.4	29.7	0.0
Amerada Hess	12	0.9950	2400	490	1.377300	3306	0.920	674	280	365	72.0	394.7	0.2
Louis Dreyfus	43	0.7500	172	69	1.377300	237	0.920	95	73	365	3.9	21.3	0.0
Shell	69	0.9750	2760	607	1.377300	3801	0.920	836	392	365	81.2	444.8	0.2
BP	212	0.7100	731	316	1.377300	1007	0.920	435	349	365	15.7	85.8	0.0
Mobil	158	0.9000	1580	442	1.377300	2176	0.920	609	374	365	42.9	235.0	0.1
Chevron	35	0.9730	1296	287	1.377300	1785	0.920	396	187	365	38.0	208.5	0.1
Conoco-Sun	37	0.9900	3700	770	1.377300	5096	0.920	1060	455	365	110.5	605.4	0.3
Star	146	0.6820	459	209	1.377300	632	0.920	287	236	365	9.4	51.8	0.0
Exxon	111	0.9450	2018	492	1.377300	2780	0.920	678	363	365	57.5	315.2	0.2
Crown	44	0.9900	4400	915	1.377300	6060	0.920	1261	541	365	131.4	719.9	0.4
Amoco	51	0.9900	5100	1061	1.377300	7024	0.920	1461	627	365	152.3	834.5	0.4
TOTAL											1777.6	10109.9	5.1

6.4.6 State Air Toxics

Description of Sources Covered

This measure addresses stationary sources that are covered by Maryland's air toxics regulations that have achieved VOC reductions above and beyond current federally enforceable limits. In general, Maryland's air toxics regulations cover any source required to obtain a permit to construct or annually renewed state permit to operate.

Control Strategy

The Department adopted the air toxics regulations in 1988. VOC reductions above and beyond current federally enforceable limits will be made federally enforceable through the use of Section 112(l) of the Act, Title V permits and The General Provisions of Title III of the Act. Maryland's Title V permit program is scheduled for adoption in 1994. The General Provisions for Title III were proposed in the Federal Register on August 11, 1993. Section 112(l) was proposed in the Federal Register on May 19, 1993.

Expected Emissions Reductions

Table 6.6 lists the specific sources covered by this measure, the 1990 base year VOC emissions, the estimated VOC reduction in tons per day and a brief explanation of why, under the State air toxics regulations, the reduction was required. The following table shows the expected emission reductions in tons per day for 2002 and 2005.

Implementation Schedule

Maryland's air toxics regulations were adopted in 1988. Maryland plans to include the sources covered by this measure in the earliest round of Title V permits.

VOC EMISSION REDUCTIONS FROM STATE AIR TOXICS REQUIREMENTS

Company	1990 Base Year Inventory Emissions (TPY)	Emission Reduction by 1999 (TPD)	Emission Reduction by 2002 (TPD)	Emission Reduction by 2005 (TPD)	Description of Controls used to obtain Emission Reductions
American Cyanamid	169	0.006	0.006	0.006	Added after condensers on "Daymax" mixers and solvent storage tanks
Quebecor	1068	0.89	0.90	0.98	Increased capture efficiency and ink reformulation to lower toluene content
Sweetheart Cup	59	0.11	0.11	0.12	Use of infrared inks and encapsulation of printing units
Vista	60	0.04	0.04	0.05	Increased number of process vents controlled and installed flare
TOTAL	--	1.1	1.1	1.2	

Rule effectiveness was applied to the emission reductions. The expected emission reductions in tons per day are the following:

	2005 VOC	2005 NO _x
Baltimore	0.96	0.0

6.4.7 NOx RACT -- Reasonably Available Control Technology

This measure requires control of nitrogen oxides (NOx) emissions by installing RACT.

Description of Source Category

NOx RACT will apply to industrial and commercial fuel burning equipment and combustion installations. The regulation established cost-effective controls on all installations located at major NOx sources. Title I of the Act requires major sources to submit proposed RACT by November 15, 1993. Affected sources must achieve compliance with RACT by May 1995. This first phase of stationary source NOx reductions resulted in an approximate 22% reduction in NOx emissions.

NOx emissions vary significantly from source to source, even with sources that are similar in size and design. NOx emissions depend upon numerous factors such as age of equipment, characteristics of fuel being burned, configuration of and type of burners, and operational techniques.

Control Strategy

The Department currently has a NOx RACT regulation in place, which establishes requirements for source categories. The regulation allows affected sources several compliance options; meet applicable standards by reducing on-site emissions, using an averaging plan, meeting pre-established standards, or requesting an alternative standard.

Expected Emissions Reductions and Methodology

The expected emission reductions were determined from the NOx RACT regulations that affected utilities for the Baltimore nonattainment area. The Department has determined the following emission reductions by 1999, 2002 and 2005 in tons per day:

	2005 VOC	2005 NOx
Baltimore	0.0	5.005

1999 NOx RACT Reductions in Tons per Day

NOx RACT	Point	Boiler ID	Emission Rate	Emission Limit	% Reduction	1999 Emissions	1999 Reductions	1999 Controlled	Notes
003-0014	BGE Wagner	1	1.180		0.000	36.047	0.000	36.047	No RACT Reductions
003-0014	BGE Wagner	2				0.122	0.000	0.122	Not included in OTC 1990 Baseline Inventory
003-0014	BGE Wagner	3	0.550		0.000	13.030	0.000	13.030	No RACT Reductions
003-0014	BGE Wagner	4	0.310		0.000	4.794	0.000	4.794	No RACT Reductions
003-0014	BGE Wagner	5	0.820	0.600	0.268	11.224	3.011	8.213	Emission Limit Estimate
003-0468	BGE Brandon Shores	1	0.419		0.000	36.213	0.000	36.213	No RACT Reductions
003-0468	BGE Brandon Shores	2				0.080	0.000	0.080	Not included in OTC 1990 Baseline Inventory
003-0468	BGE Brandon Shores	3				0.080	0.000	0.080	Not included in OTC 1990 Baseline Inventory
005-0076	BGE Notchcliff	1	0.390		0.000	0.201	0.000	0.201	Baseline - Unaffected
005-0076	BGE Notchcliff	2	0.390		0.000	0.201	0.000	0.201	Baseline - Unaffected
005-0076	BGE Notchcliff	3	0.390		0.000	0.201	0.000	0.201	Baseline - Unaffected
005-0076	BGE Notchcliff	4	0.390		0.000	0.201	0.000	0.201	Baseline - Unaffected
005-0076	BGE Notchcliff	5	0.390		0.000	0.205	0.000	0.205	Baseline - Unaffected
005-0076	BGE Notchcliff	6	0.390		0.000	0.205	0.000	0.205	Baseline - Unaffected
005-0076	BGE Notchcliff	7	0.390		0.000	0.205	0.000	0.205	Baseline - Unaffected
005-0076	BGE Notchcliff	8	0.390		0.000	0.205	0.000	0.205	Baseline - Unaffected
005-0076	BGE Notchcliff	9	0.140			0.004	0.000	0.004	Not included in OTC 1990 Baseline Inventory
005-0076	BGE Notchcliff	10	0.140			0.004	0.000	0.004	Not included in OTC 1990 Baseline Inventory
005-0076	BGE Notchcliff	11	0.140			0.003	0.000	0.003	Not included in OTC 1990 Baseline Inventory
005-0078	BGE Riverside	1	0.490			0.236	0.000	0.236	Baseline - Unaffected
005-0078	BGE Riverside	2	0.630			0.236	0.000	0.236	Baseline - Unaffected
005-0078	BGE Riverside	3	0.450	0.400	0.111	1.908	0.212	1.696	Emission Limit Estimate
005-0078	BGE Riverside	4	0.530			1.739	0.000	1.739	Retired
005-0078	BGE Riverside	5	0.452			2.063	0.000	2.063	Retired
005-0078	BGE Riverside	6	0.451			3.036	0.000	3.036	Retired
005-0078	BGE Riverside	7	0.451			2.384	0.000	2.384	Retired
005-0078	BGE Riverside	8	0.400			0.695	0.000	0.695	Baseline - Unaffected
005-0079	BGE Crane	1				0.299	0.000	0.299	Not included in OTC 1990 Baseline Inventory
005-0079	BGE Crane	2				0.000	0.000	0.000	Not included in OTC 1990 Baseline Inventory
005-0079	BGE Crane	3				0.008	0.000	0.008	Not included in OTC 1990 Baseline Inventory
005-0079	BGE Crane	4				0.009	0.000	0.009	Not included in OTC 1990 Baseline Inventory
005-0079	BGE Crane	5	1.200		0.000	22.899	0.000	22.899	No RACT Reductions
005-0079	BGE Crane	6	1.340		0.000	22.820	0.000	22.820	No RACT Reductions
005-0079	BGE Crane	7				0.000	0.000	0.000	Not included in OTC 1990 Baseline Inventory
005-0079	BGE Crane	8				0.000	0.000	0.000	Not included in OTC 1990 Baseline Inventory
005-0079	BGE Crane	9				0.000	0.000	0.000	Not included in OTC 1990 Baseline Inventory
025-0024	BGE Perryman	1	0.490			0.737	0.000	0.737	Baseline - Unaffected
025-0024	BGE Perryman	2	0.490			0.737	0.000	0.737	Baseline - Unaffected
025-0024	BGE Perryman	3	0.490			0.980	0.000	0.980	Baseline - Unaffected
025-0024	BGE Perryman	4	0.490			0.980	0.000	0.980	Baseline - Unaffected
510-0006	BGE Westport	1	0.270			0.049	0.000	0.049	Not included in OTC 1990 Baseline Inventory
510-0006	BGE Westport	2	0.550			2.099	0.000	2.099	Retired
510-0006	BGE Westport	3	0.550			3.602	0.000	3.602	Retired
510-0006	BGE Westport	4	0.397			1.074	0.000	1.074	Retired
510-0007	BGE Gould Street	2	0.300	0.300	0.000	2.839	0.000	2.839	No RACT Reductions
510-0265	BGE Philadelphia Road	1	0.490			0.338	0.000	0.338	Baseline - Unaffected
510-0265	BGE Philadelphia Road	2	0.490			0.338	0.000	0.338	Baseline - Unaffected
510-0265	BGE Philadelphia Road	3	0.490			0.309	0.000	0.309	Baseline - Unaffected
510-0265	BGE Philadelphia Road	4	0.490			0.309	0.000	0.309	Baseline - Unaffected
027-0223	Transcontinental Pipeline				0.230	6.973	1.604	5.369	MDE Enforcement Estimate
						1999 Emissions	1999 Reductions	1999 Controlled	
						182.918	4.827	178.091	Total Baltimore NAA

2002 NOx RACT Reductions in Tons per Day

<i>NOx RACT</i>	Point	Boiler ID	Emission Rate	Emission Limit	% Reduction	2002 Emissions	2002 Reductions	2002 Controlled	Notes
003-0014	BGE Wagner	1	1.180		0.000	37.236	0.000	37.236	No RACT Reductions
003-0014	BGE Wagner	2				0.122	0.000	0.122	Not included in OTC 1990 Baseline Inventory
003-0014	BGE Wagner	3	0.550		0.000	13.344	0.000	13.344	No RACT Reductions
003-0014	BGE Wagner	4	0.310		0.000	4.794	0.000	4.794	No RACT Reductions
003-0014	BGE Wagner	5	0.820	0.600	0.268	11.594	3.111	8.484	Emission Limit Estimate
003-0468	BGE Brandon Shores	1	0.419		0.000	37.407	0.000	37.407	No RACT Reductions
003-0468	BGE Brandon Shores	2				0.080	0.000	0.080	Not included in OTC 1990 Baseline Inventory
003-0468	BGE Brandon Shores	3				0.080	0.000	0.080	Not included in OTC 1990 Baseline Inventory
005-0076	BGE Notchcliff	1	0.390		0.000	0.201	0.000	0.201	Baseline - Unaffected
005-0076	BGE Notchcliff	2	0.390		0.000	0.201	0.000	0.201	Baseline - Unaffected
005-0076	BGE Notchcliff	3	0.390		0.000	0.201	0.000	0.201	Baseline - Unaffected
005-0076	BGE Notchcliff	4	0.390		0.000	0.201	0.000	0.201	Baseline - Unaffected
005-0076	BGE Notchcliff	5	0.390		0.000	0.205	0.000	0.205	Baseline - Unaffected
005-0076	BGE Notchcliff	6	0.390		0.000	0.205	0.000	0.205	Baseline - Unaffected
005-0076	BGE Notchcliff	7	0.390		0.000	0.205	0.000	0.205	Baseline - Unaffected
005-0076	BGE Notchcliff	8	0.390		0.000	0.205	0.000	0.205	Baseline - Unaffected
005-0076	BGE Notchcliff	9	0.140			0.004	0.000	0.004	Not included in OTC 1990 Baseline Inventory
005-0076	BGE Notchcliff	10	0.140			0.004	0.000	0.004	Not included in OTC 1990 Baseline Inventory
005-0076	BGE Notchcliff	11	0.140			0.003	0.000	0.003	Not included in OTC 1990 Baseline Inventory
005-0078	BGE Riverside	1	0.490			0.241	0.000	0.241	Baseline - Unaffected
005-0078	BGE Riverside	2	0.630			0.241	0.000	0.241	Baseline - Unaffected
005-0078	BGE Riverside	3	0.450	0.400	0.111	1.954	0.217	1.736	Emission Limit Estimate
005-0078	BGE Riverside	4	0.530			1.781	0.000	1.781	Retired
005-0078	BGE Riverside	5	0.452			2.113	0.000	2.113	Retired
005-0078	BGE Riverside	6	0.451			3.110	0.000	3.110	Retired
005-0078	BGE Riverside	7	0.451			2.441	0.000	2.441	Retired
005-0078	BGE Riverside	8	0.400			0.711	0.000	0.711	Baseline - Unaffected
005-0079	BGE Crane	1				0.299	0.000	0.299	Not included in OTC 1990 Baseline Inventory
005-0079	BGE Crane	2				0.000	0.000	0.000	Not included in OTC 1990 Baseline Inventory
005-0079	BGE Crane	3				0.008	0.000	0.008	Not included in OTC 1990 Baseline Inventory
005-0079	BGE Crane	4				0.009	0.000	0.009	Not included in OTC 1990 Baseline Inventory
005-0079	BGE Crane	5	1.200		0.000	23.653	0.000	23.653	No RACT Reductions
005-0079	BGE Crane	6	1.340		0.000	23.572	0.000	23.572	No RACT Reductions
005-0079	BGE Crane	7				0.000	0.000	0.000	Not included in OTC 1990 Baseline Inventory
005-0079	BGE Crane	8				0.000	0.000	0.000	Not included in OTC 1990 Baseline Inventory
005-0079	BGE Crane	9				0.000	0.000	0.000	Not included in OTC 1990 Baseline Inventory
025-0024	BGE Perryman	1	0.490			0.755	0.000	0.755	Baseline - Unaffected
025-0024	BGE Perryman	2	0.490			0.755	0.000	0.755	Baseline - Unaffected
025-0024	BGE Perryman	3	0.490			1.004	0.000	1.004	Baseline - Unaffected
025-0024	BGE Perryman	4	0.490			1.004	0.000	1.004	Baseline - Unaffected
510-0006	BGE Westport	1	0.270			0.049	0.000	0.049	Not included in OTC 1990 Baseline Inventory
510-0006	BGE Westport	2	0.550			2.149	0.000	2.149	Retired
510-0006	BGE Westport	3	0.550			3.689	0.000	3.689	Retired
510-0006	BGE Westport	4	0.397			1.074	0.000	1.074	Retired
510-0007	BGE Gould Street	2	0.300	0.300	0.000	2.907	0.000	2.907	No RACT Reductions
510-0265	BGE Philadelphia Road	1	0.490			0.346	0.000	0.346	Baseline - Unaffected
510-0265	BGE Philadelphia Road	2	0.490			0.346	0.000	0.346	Baseline - Unaffected
510-0265	BGE Philadelphia Road	3	0.490			0.317	0.000	0.317	Baseline - Unaffected
510-0265	BGE Philadelphia Road	4	0.490			0.317	0.000	0.317	Baseline - Unaffected
027-0223	Transcontinental Pipeline				0.230	6.973	1.604	5.369	MDE Enforcement Estimate
						2002 Emissions	2002 Reductions	2002 Controlled	
						188.108	4.931	183.176	Total Baltimore NAA

2005 NOx RACT Reductions in Tons per Day

<i>NOx RACT</i>	Point	Boiler ID	Emission Rate	Emission Limit	% Reduction	2005 Emissions	2005 Reductions	2005 Controlled	Notes
003-0014	BGE Wagner	1	1.180		0.000	38.101	0.000	38.101	No RACT Reductions
003-0014	BGE Wagner	2				0.122	0.000	0.122	Not included in OTC 1990 Baseline Inventory
003-0014	BGE Wagner	3	0.550		0.000	13.397	0.000	13.397	No RACT Reductions
003-0014	BGE Wagner	4	0.310		0.000	4.794	0.000	4.794	No RACT Reductions
003-0014	BGE Wagner	5	0.820	0.600	0.268	11.864	3.183	8.681	Limit estimated at 0.60, 0.50, 0.45
003-0468	BGE Brandon Shores	1	0.420		0.000	38.276	0.000	38.276	No RACT Reductions
003-0468	BGE Brandon Shores	2				0.080	0.000	0.080	Not included in OTC 1990 Baseline Inventory
003-0468	BGE Brandon Shores	3				0.080	0.000	0.080	Not included in OTC 1990 Baseline Inventory
005-0076	BGE Notchcliff	1	0.390			0.201	0.000	0.201	Baseline - Unaffected
005-0076	BGE Notchcliff	2	0.390			0.201	0.000	0.201	Baseline - Unaffected
005-0076	BGE Notchcliff	3	0.390			0.201	0.000	0.201	Baseline - Unaffected
005-0076	BGE Notchcliff	4	0.390			0.201	0.000	0.201	Baseline - Unaffected
005-0076	BGE Notchcliff	5	0.390			0.205	0.000	0.205	Baseline - Unaffected
005-0076	BGE Notchcliff	6	0.390			0.205	0.000	0.205	Baseline - Unaffected
005-0076	BGE Notchcliff	7	0.390			0.205	0.000	0.205	Baseline - Unaffected
005-0076	BGE Notchcliff	8	0.390			0.205	0.000	0.205	Baseline - Unaffected
005-0076	BGE Notchcliff	9	0.140			0.003	0.000	0.003	Not included in OTC 1990 Baseline Inventory
005-0076	BGE Notchcliff	10	0.140			0.003	0.000	0.003	Not included in OTC 1990 Baseline Inventory
005-0076	BGE Notchcliff	11	0.140			0.003	0.000	0.003	Not included in OTC 1990 Baseline Inventory
005-0078	BGE Riverside	1	0.490			0.242	0.000	0.242	Baseline - Unaffected
005-0078	BGE Riverside	2	0.630			0.242	0.000	0.242	Baseline - Unaffected
005-0078	BGE Riverside	3	0.450	0.400	0.111	1.961	0.218	1.743	Limit estimated in increments 0.40, 0.35, 0.30
005-0078	BGE Riverside	4	0.530			1.788	0.000	1.788	Retired
005-0078	BGE Riverside	5	0.452			2.121	0.000	2.121	Retired
005-0078	BGE Riverside	6	0.451			3.122	0.000	3.122	Retired
005-0078	BGE Riverside	7	0.451			2.451	0.000	2.451	Retired
005-0078	BGE Riverside	8	0.400			0.714	0.000	0.714	Baseline - Unaffected
005-0079	BGE Crane	1				0.299	0.000	0.299	Not included in OTC 1990 Baseline Inventory
005-0079	BGE Crane	2				0.000	0.000	0.000	Retired
005-0079	BGE Crane	3				0.008	0.000	0.008	Not included in OTC 1990 Baseline Inventory
005-0079	BGE Crane	4				0.009	0.000	0.009	Not included in OTC 1990 Baseline Inventory
005-0079	BGE Crane	5	1.200		0.000	24.203	0.000	24.203	No RACT Reductions
005-0079	BGE Crane	6	1.340		0.000	24.120	0.000	24.120	No RACT Reductions
005-0079	BGE Crane	7				0.000	0.000	0.000	Not included in OTC 1990 Baseline Inventory
005-0079	BGE Crane	8				0.000	0.000	0.000	Not included in OTC 1990 Baseline Inventory
005-0079	BGE Crane	9				0.000	0.000	0.000	Not included in OTC 1990 Baseline Inventory
025-0024	BGE Perryman	1	0.490			0.758	0.000	0.758	Baseline - Unaffected
025-0024	BGE Perryman	2	0.490			0.758	0.000	0.758	Baseline - Unaffected
025-0024	BGE Perryman	3	0.490			1.008	0.000	1.008	Baseline - Unaffected
025-0024	BGE Perryman	4	0.490			1.008	0.000	1.008	Baseline - Unaffected
510-0006	BGE Westport	1	0.270			0.049	0.000	0.049	Not included in OTC 1990 Baseline Inventory
510-0006	BGE Westport	2	0.550			2.158	0.000	2.158	Retired
510-0006	BGE Westport	3	0.550			3.704	0.000	3.704	Retired
510-0006	BGE Westport	4	0.397			1.074	0.000	1.074	Retired
510-0007	BGE Gould Street	2	0.300	0.300	0.000	2.919	0.000	2.919	No RACT Reductions
510-0265	BGE Philadelphia Road	1	0.490			0.347	0.000	0.347	Baseline - Unaffected
510-0265	BGE Philadelphia Road	2	0.490			0.347	0.000	0.347	Baseline - Unaffected
510-0265	BGE Philadelphia Road	3	0.490			0.318	0.000	0.318	Baseline - Unaffected
510-0265	BGE Philadelphia Road	4	0.490			0.318	0.000	0.318	Baseline - Unaffected
027-0223	Transcontinental Pipeline				0.230	6.973	1.604	5.369	MDE Enforcement Estimate
						2005 Emissions	2005 Reductions	2005 Controlled	
						191.363	5.005	186.358	Total Baltimore NAA

6.4.8 NOx Phase II / Phase III Ozone Transport Commission (OTC)/NOx Budget Rule (Phase II) and NOx SIP Call (Phase III)

Description of Source Category

On Tuesday, September 27, 1994, the OTC initiated a major agreement to cut emissions of NOx from power plants and other major stationary sources of pollution throughout the Northeast and Mid-Atlantic States. The agreement, in the form of a Memorandum of Understanding (MOU), recognizes that further reductions in NOx emissions are needed to enable the entire Ozone Transport Region (OTR) to meet the NAAQS.

The Department adopted a “NOx Budget” rule to require a second phase of stationary source NOx reductions as part of a coordinated regulatory initiative by the Ozone Transport Region (OTR) states to further reduce NOx emissions in the Northeast. This regulation requires large stationary sources to reduce summertime NOx emissions by approximately 65% from 1990 levels. The regulation also includes provisions allowing sources to comply by trading “allowances.” This regulation requires affected sources to reduce their emissions to meet these requirements by May 2001.

In late 1998, the U.S. EPA adopted a rule called the “NOx SIP Call” to reduce ozone transport in the Eastern United States. This regional NOx reduction program requires 22 states, including Maryland, to submit regulations and a revision to State Implementation Plans (SIPs) to further reduce NOx emission by 2007. COMAR 26.11.29 and .30 are a third phase of NOx reductions that will satisfy all of the federal requirements and will enable trading in the OTR and in the 22 state region. Maryland’s Phase III regulations achieve approximately 23% additional reductions.

Maryland’s proposed Phase III regulations will require major NOx sources to reduce emissions by May 1, 2003. These regulations require reductions at large stationary sources like power plants, cement kilns and large industrial boilers. The regulations require affected sources to add specific control equipment or to reduce emissions or trade to meet an allowable amount of seasonal NOx emissions by 2003. The “allowances” will “cap” NOx emissions for each source while providing a mechanism for trading. The allowance cap that is to be met by the 2003 ozone season, will enable Maryland to meet its Clean Air Act and NOx SIP Call requirements in a timely manner.

In general, the regulations require power plants to reduce emissions by about 85%, cement kilns to achieve an approximate 30% reductions and large industrial boilers to reduce emissions by up to 90%. The regulations also require sources to have NOx emissions measuring devices such as continuous emission monitors and to appoint a representative to provide and certify emissions data and to represent the source when allowances are being traded.

Control Strategy

The agreements are a phased approach to controlling emissions of NOx from power plants and other large fuel combustion sources. The first phase (known as Phase II because one phase of emission reductions, RACT, has already been initiated) was to be implemented in May 1999.

This phase includes three control zones in the region: an inner zone ranging from the Washington, D.C. metropolitan area northeast to southeastern New Hampshire; an outer zone ranging out from the inner zone to western Pennsylvania; and a northern zone which includes much of northern New York and northern New England, including most of New Hampshire.

Control requirements vary with the zone in which sources are located, but the most stringent requirements are in the inner zone. The next phase (known as Phase III) includes additional pollution reductions and the equalization of control requirements in the inner and outer zones. New scientific data and modeling studies could provide the basis for a modified plan. These pollution reductions would be initiated in May 2003.

Estimated Emissions Reductions and Methodology

During Phase II, sources in the inner and outer zones will be required to limit emissions to 0.2 lbs. of NOx per MMBtu or to make reductions of 55-65% from the 1990 base year inventory, whichever measure is less stringent. Sources in the northern zone will only be required to comply with RACT. Sources in the northern zone will be required to limit emissions to 0.2 lbs. of NOx per MMBtu or to reduce emissions by 50-65%. Therefore, affected sources in the Baltimore nonattainment area must reduce their emissions by 65% from their 1990 levels by 1999. The 1999 reduction credit is based on Maryland’s commitment to the OTC MOU.

The MDE adopted a NOx Budget Rule effective June 1, 1998 implementing the OTC NOx MOU. This rule was remanded to the Department as a result of litigation by the utilities and a second rule was adopted effective October 8, 1999. The amended rule required compliance with the NOx Budget Rule by May 1, 2000. Thus, the rule was replaced within 18 months of the 1999 deadline.

The NOx SIP Call requirements superseded Phase II of the OTC MOU. The expected emission reductions for 2002 and 2005 were calculated using the listed allowances within MDE’s NOx Budget Rule or NOx SIP Call regulations. The expected emissions reductions in tons per day for Phase II in 2002 and the NOx SIP Call in 2005 are included in the following table:

	2005 VOC	2005 NOx
Baltimore	0.0	127.599

2005 NOx Reductions in Tons per Day

County	Facility	Unit		NOx SIP Call Allowable Emission Level tons/season	NOx SIP Call Allowable Emission Level tons/oz-day	NOx SIP Call Facility Total tons/oz-day	1990 Inventory tons/day	
Anne Arundel	BGE Wagner	Unit 1	NOx SIP Call	74	0.484	8.275	44.311	
		Unit 2	NOx SIP Call	367	2.399			
		Unit 3	NOx SIP Call	669	4.373			
		Unit 4	NOx SIP Call	156	1.020			
	BGE Brandon Shores	Unit 1	NOx SIP Call	1850	12.092	23.980	67.637	
		Unit 2	NOx SIP Call	1819	11.889			
Baltimore City	BGE Westport	Unit 3	NOx Budget	85	0.556	1.516	4.878	
		Unit 4	NOx Budget	126	0.824			
		CT 5	NOx SIP Call	21	0.137			
		BFE Gould Street	Unit 3	NOx SIP Call	50	0.327	0.327	2.428
		BGE Philadelphia Road	CT 1	NOx Budget	4	0.026	0.111	1.107
			CT 2	NOx Budget	5	0.033		
			CT 3	NOx Budget	4	0.026		
	CT 4		NOx Budget	4	0.026			
Baltimore County	BGE Riverside	Unit 1	NOx Budget	98	0.641	2.771	10.517	
		Unit 2	NOx Budget	81	0.529			
		Unit 3	NOx Budget	70	0.458			
		Unit 4	NOx SIP Call	26	0.170			
		Unit 5	NOx Budget	128	0.837			
		CT 6	NOx SIP Call	9	0.059			
		CT 7	NOx Budget	4	0.026			
		CT 8	NOx Budget	8	0.052			
		BGE Crane	Unit 1	NOx SIP Call	461	3.013	5.856	43.003
			Unit 2	NOx SIP Call	435	2.843		
		BGE Notch Cliff	CT 1	NOx Budget	14	0.092	0.791	1.624
			CT 2	NOx Budget	15	0.098		
			CT 3	NOx Budget	16	0.105		
			CT 4	NOx Budget	15	0.098		
			CT 5	NOx Budget	15	0.098		
			CT 6	NOx Budget	13	0.085		
	CT 7		NOx Budget	17	0.111			
	CT 8		NOx Budget	16	0.105			
Carroll	No Units							
Harford	BGE Perryman	CT 1	NOx SIP Call	7	0.046	2.209	2.938	
		CT 2	NOx SIP Call	7	0.046			
		CT 3	NOx SIP Call	5	0.033			
		CT 4	NOx SIP Call	7	0.046			
		CT 51	NOx SIP Call	312	2.039			
Howard	No Units							
				7013	45.837	45.837	178.441	
TOTAL REDUCTIONS RACT							132.604	
TOTAL REDUCTIONS SIP CALL							5.005	
TOTAL REDUCTIONS CLAIMED							127.599	

7.0 CONTINGENCY MEASURES

The Act requires the State to adopt specific contingency measures that will take effect without further action by the State or the EPA if the State fails to reduce VOC/NOx emissions by an additional 3% per year from 1997 through 2005.

The contingency measures identified by the State must be sufficient to secure an additional 3 percent reduction in ozone precursor emissions in the year following the year in which the failure has been identified. If the shortfall is less than 3 percent, a contingency measure need only cover that smaller percentage. If the shortfall is greater than 3 percent, the State, in an annual tracking report to EPA, must either identify the additional actions it will take to cure the shortfall before the next milestone or maintain a reserve of contingency measures capable of covering a shortfall greater than 3 percent. Early implementation of an emission reduction measure to be implemented in the future is acceptable as a contingency measure.

Table 7.1: Contingency Measure Calculation

Contingency Measure Calculation Baltimore Nonattainment Area Emissions in Tons per Day		
[A]	1990 Base Year Inventory	554.29
[B]	Biogenic Emissions	180.09
[C=A-B]	1990 Rate-of-Progress Base Year Inventory	374.20
[D]	FMVCP/RVP Reductions Between 1990 and 2005	99.77
[E=C-D]	1990 Adjusted Base Year Inventory Calculated Relative to 2005	274.43
[R]	Percent Contingency Measure Reduction Requirement (3%)	0.03
[(Red)=E*R]	Contingency Measure Reduction Requirements	8.23

The following contingency plan has been developed.

7.1 Surplus Reductions from Existing Measures

Some emission control strategies listed to meet the 2005 target level are expected to result in more emission reductions than are needed to meet the requirements. If other measures fail to meet expected reductions, the excess from the following measures will be used to make up the difference:

- Open burning ban
- State air toxics
- NOx Budget Rule (based on the Ozone Transport Commission's NOx MOU)
- OTC - Portable Fuel Container

During the development of this plan, some of the contingency measures established in prior revisions were reallocated to the control measures portion of this plan. Although the plan lists contingency measures and EPA guidance allows an additional year to adopt new contingency measures, MDE commits to adopt and submit additional sufficient measures to replace those contingency measures reallocated to the control measures portion of the plan and submit an updated contingency plan reflecting these additional contingency measures by October 31, 2004, unless EPA informs us otherwise.