Total Maximum Daily Load of Phosphorus in the Upper Monocacy River Watershed, Frederick and Carroll Counties, Maryland

FINAL



Submitted to:

Watershed Protection Division
U.S. Environmental Protection Agency, Region III
1650 Arch Street
Philadelphia, PA 19103-2029

August, 2012

EPA Submittal Date: September 26, 2012 EPA Approval Date: May 7, 2013

Upper Monocacy River Nutrient TMDL Document Version: August 30, 2012

Table of Contents

List of Figures	i
List of Tables	i
List of Abbreviations	ii
EXECUTIVE SUMMARY	iv
1.0 INTRODUCTION	1
2.0 SETTING AND WATER QUALITY DESCRIPTION	3
2.1 General Setting	5
2.2 Source Assessment	
2.2.2 Point Source (PS) Assessment	
2.2.3 Overall Phosphorus Budget	
2.3 Water Quality Characterization	
2.3.1 Biological Stressor Identification (BSID) Analysis	
2.3.2 Dissolved Oxygen	
2.3.3 Nutrients	
2.3.4 Nutrient Limitation	
2.3.5 Upper Monocacy River Benthic Macroinvertebrate Monitoring State 2.4 Water Quality Impairment	
3.0 TARGETED WATER QUALITY GOAL	
4.0 TOTAL MAXIMUM DAILY LOADS AND SOURCE ALLOCATION	
4.1 Overview	
4.1 Overview 4.2 Analysis Framework	
4.3 Scenario Descriptions and Results.	
4.4 Critical Conditions and Seasonality	
4.5 TMDL Loading Caps	
4.6 Load Allocations Between Point and Nonpoint Sources	
4.7 Margin of Safety	
4.8 Summary of Total Maximum Daily Loads	
5.0 ASSURANCE OF IMPLEMENTATION	
REFERENCES	38
APPENDIX A – Watershed Characterization Data	A-1
APPENDIX B – Technical Approach Used to Generate Maximum Daily Load	ls B-1
APPENDIX C – Hydrologic Relationship between the Double Pipe Creek, Mi	D 8-
Digit Upper Monocacy River, and Lower Monocacy River Watersheds	C-1

List of Figures

Figure 1: Location Map of the MD 8-digit Upper Monocacy River Watershed in
Frederick and Carroll Counties, Maryland 4
Figure 2: Landuse of the Upper Monocacy River Watershed
Figure 3: Monitoring Stations in the Upper Monocacy River Watershed
Figure 4: Upper Monocacy River Dissolved Oxygen Data from 1998 through 2007 18
Figure 5: Upper Monocacy River Total Nitrogen Data from 1998 through 2007 19
Figure 6: Upper Monocacy River Total Phosphorus Data from 1998 through 2007 19
Figure B-1: Histogram of CBP River Segment Daily Phosphorus Simulation Results for
the Upper Monocacy River Watershed
Figure C-1: Location of the Double Pipe Creek, Upper Monocacy River, and Lower
Monocacy River Watersheds
Figure C-2: Flow Schematic of the Upper Monocacy River, Upper Monocacy River, and
Lower Monocacy River Watersheds
List of Tables
Table ES-1: MD 8-digit Upper Monocacy River Baseline Phosphorus Loads (lbs/yr) vii
Table ES-2: Average Annual MD 8-digit Upper Monocacy River TMDL of Phosphorus
(lbs/yr)viii
Table ES-3: MD 8-Digit Upper Monocacy River Baseline Phosphorus Load, TMDL, and
Total Reduction Percentage viii
Table 1: Landuse Percentage Distribution for Upper Monocacy River Watershed 6
Table 2: Target EOS Loading Rates (lbs/ac/yr) by Landuse and County
Table 3: 2009 Annual Phosphorus Loads for MD Facilities in Upper Monocacy River
Watershed Represented in Phase 5 Watershed Model
Table 4: Upper Monocacy River Watershed Detailed Baseline Total Phosphorus Loads
Table 5: MD 8-digit Upper Monocacy River Baseline Phosphorus Loads
Table 6: Monitoring Stations in the Upper Monocacy River Watershed
Table 7: Upper Monocacy River DNR Core Data
Table 8: Upper Monocacy River Watershed TMDL for Phosphorus
Table 9: MD 8-digit Upper Monocacy River TMDL Phosphorus TMDL by Source
Category 31
Table 10: Average Annual MD 8-digit Upper Monocacy River TMDL of Phosphorus. 34
Table 11: MD 8-digit Upper Monocacy River Maximum Daily Load of Phosphorus 34
Table A-1: Reference Watersheds
Table B-1: Summary of Maximum Daily Loads of Total Phosphorus for the Upper
Monocacy River Watershed (lbs/day)

List of Abbreviations

BIBI Benthic Index of Biotic Integrity

BMP Best Management Practices

BSID Biological Stressor Identification

CAFO Concentrated Animal Feeding Operation

CBLCD Chesapeake Bay Watershed Land Cover Data

CBP P5.3.2 Chesapeake Bay Program Phase 5.3.2

CCAP Coastal Change Analysis Program

cfs Cubic Feet per Second

CFR Code of Federal Regulations
COMAR Code of Maryland Regulations

CNMP Comprehensive Nutrient Management Plan

CSOs Combined Sewer Overflows

CV Coefficient of Variation

CWA Clean Water Act

DMR Discharge Monitoring Reports

DNR Maryland Department of Natural Resources

ENR Enhanced Nutrient Reduction

EOS Edge-of-Stream

EPA Environmental Protection Agency

EPT Ephemeroptera, Plecoptera, and Trichoptera

DO Dissolved Oxygen

FIBI Fish Index of Biologic Integrity
GIS Geographic Information System

HSPF Hydrological Simulation Program FORTRAN

IBI Index of Biotic Integrity

LA Load Allocation

lbs Pounds

lbs/ac/yr Pounds Per Acre Per Year

lbs/day Pounds Per Day lbs/yr Pound Per Year

MACS Maryland Agricultural Cost Share
MAFO Maryland Animal Feeding Operation

MAL Minimum Allowable Limit

MBSS Maryland Biological Stream Survey

MDE Maryland Department of the Environment

MDL Maximum Daily Load

MGD Millions of Gallons per Day

mg/l Milligrams per liter
MOS Margin of Safety

MRLC Multi-Resolution Land Characteristics
MS4 Municipal Separate Stormwater System

N/A Not ApplicableNOI Notice of Intent

NLCD Consortium's National Land Cover Data

NOAA National Oceanic and Atmospheric Administration

NPS Nonpoint Source

NPDES National Pollutant Discharge Elimination System

PCB Polychlorinated biphenyls

PS Point Source

PSI Phosphorus Site Index

TMDL Total Maximum Daily Load

TN Total Nitrogen
TP Total Phosphorus

USGS United States Geological Survey WIP Watershed Implementation Plan

WLA Waste Load Allocation

WQIA Water Quality Improvement Act
WQLS Water Quality Limited Segment
WWTP Wastewater Treatment Plant

EXECUTIVE SUMMARY

This document, upon approval by the U.S. Environmental Protection Agency (EPA), establishes a Total Maximum Daily Load (TMDL) for total phosphorus (TP) in the Upper Monocacy River watershed (basin number 02140303) (2010 *Integrated Report of Surface Water Quality in Maryland* Assessment Unit ID: MD-02140303). Section 303(d) of the federal Clean Water Act (CWA) and the EPA's implementing regulations direct each state to identify and list waters, known as water quality limited segments (WQLSs), in which current required controls of a specified substance are inadequate to achieve water quality standards. For each WQLS, the State is required to either establish a TMDL of the specified substance that the waterbody can receive without violating water quality standards, or demonstrate that water quality standards are being met (CFR 2011a).

The Maryland Department of the Environment (MDE) has identified the waters of the Upper Monocacy River on the State's 303(d) List as impaired by nutrients (1996) and impacts to biological communities (2002) (MDE 2010). All impairments are listed for non-tidal streams. Because scientific community supports that phosphorus is generally the limiting nutrient in freshwater aquatic systems, the 1996 nutrients listing was refined in the 2008 Integrated Report to identify phosphorus as the specific impairing substance (MDE 2008). Therefore, the listed impairment of phosphorus will henceforth be referred to in this report and the term "nutrients" should be read as interchangeable with "phosphorus" in this case. The Maryland Surface Water Use Designation in the Code of Maryland Regulations (COMAR) for the mainstem of the Upper Monocacy River and tributaries is Use IV-P (*Water Contact Recreation, Protection of Aquatic Life Recreational Trout Waters and Public Water Supply*) except for Fishing Creek, Hunting Creek, Owens Creek, Tuscarora Creek, and Friends Creek, which are designated as Use III-P (*Water Contact Recreation, Protection of Nontidal Cold Water Aquatic Life, and Public Water Supply*) (COMAR 2012a,b,c).

A data solicitation for nutrients was conducted by MDE in November 2009, and all readily available data up to the time of the TMDL development have been considered. A TMDL for fecal coliform and a TMDL for sediment were approved by the US EPA in 2009. The listing for impacts to biological communities will be addressed separately at a future date.

The Upper Monocacy River watershed aquatic health scores, consisting of the Benthic Index of Biotic Integrity (BIBI) and Fish Index of Biotic Integrity (FIBI), indicate that the biological metrics for the watershed exhibit a significant negative deviation from reference conditions (Roth *et al.* 2005). The Biological Stressor Identification (BSID) analysis for the Upper Monocacy River watershed identified both phosphorus and nitrogen as potential stressors. Both total phosphorus and orthophosphate show a significant association with degraded biological conditions; as much as 33% of the biologically impacted stream miles in the watershed may be degraded due to high total phosphorus and 33% degraded due to high orthophosphate. Similarly, according to the BSID analysis, 20% of the biologically impacted stream miles in the Upper Monocacy River watershed are associated with high total nitrogen concentrations. An analysis of

observed TN:TP ratios shows, however, that phosphorus is the limiting nutrient in Upper Monocacy River. Because nitrogen generally exists in quantities greater than necessary to sustain algal growth, excess nitrogen *per se* is not the cause of the biological impairment in Upper Monocacy River, and the reduction of nitrogen loads would not be an effective means of ensuring that the Upper Monocacy River watershed is free from impacts on aquatic life from eutrophication. Therefore, load allocations for the Upper Monocacy River Nutrient TMDL will apply only to total phosphorus.

The objective of this TMDL is to establish phosphorus loads that will be protective of the Aquatic Life Use designation for the Upper Monocacy River watershed. Currently in Maryland, there are no specific numeric criteria that quantify the impact of nutrients on the aquatic health of non-tidal stream systems; therefore, a reference watershed TMDL approach was used, which resulted in the establishment of a *phosphorus loading threshold*. This threshold is based on a detailed analysis of phosphorus loads from watersheds that are identified as supporting aquatic life (*i.e.*, reference watersheds) based on Maryland's biocriteria (Roth *et al.* 1998, 2000; Stribling *et al.* 1998; MDE 2010a). This threshold is then used to determine a watershed specific phosphorus TMDL. The resulting loads are considered the maximum allowable loads the watershed can receive without causing nutrient related impacts to aquatic health.

The computational framework chosen for the Upper Monocacy River watershed TMDL was the Chesapeake Bay Program Phase 5.3.2 (CBP P5.3.2) Watershed Model. The spatial domain of the CBP P5.3.2 Watershed Model segmentation aggregates to the Maryland (MD) 8-digit watersheds, which is consistent with the impairment listing.

EPA's regulations require TMDLs to take into account critical conditions for stream flow, loading, and water quality parameters (CFR 2011a). The premise of the reference watershed approach is that the reference watersheds are meeting water quality standards even under critical conditions. Therefore, the phosphorus loading rate derived from the reference watersheds protects water quality standards under critical conditions. Moreover, the loading rates used in the TMDL were determined using the HSPF model, which is a continuous simulation model with a simulation period 1991-2000, thereby addressing annual changes in hydrology and capturing wet, average, and dry years. The biological monitoring data used to determine the reference watersheds also integrates the stress effects over the course of time and thus inherently addresses critical conditions.

EPA's regulations also require TMDLs to be presented as a sum of waste load allocations (WLAs) for permitted point sources in the assessment unit and load allocations (LAs) for nonpoint sources generated within the assessment unit. In addition, TMDLs must account for natural background, tributary and adjacent segment loads. Finally, TMDLs must also include a margin of safety (MOS) to account for any lack of knowledge and uncertainty concerning the relationship between loads and water quality (CFR 2011a). Since the phosphorus loading threshold was conservatively based on the median phosphorus loading rates from reference watersheds, Maryland has adopted an implicit MOS for nutrient TMDLs.

Biological results from both the DNR CORE/TREND and MBSS stations along the mainstem of the MD 8-digit Upper Monocacy River indicate that mainstem water quality can be classified as Good to Very Good. Consequently, the nutrient impairment is only within the lower order (smaller) streams in the Maryland portion of the watershed. Pennsylvania's portion of the watershed, therefore, is divided into two sections: (1) the section of the watershed in Pennsylvania that enters Maryland only through mainstem Upper Monocacy River, upstream of monitoring station MON0528, will receive an informational TMDL based on current loading conditions, while (2) the section of Pennsylvania's portion of the watershed that drains into Maryland's lower order streams downstream of station MON0528 will require reductions in phosphorus loads to address the impairment.

The MD 8-digit Upper Monocacy River total Baseline Phosphorus Load is 716,507 pounds per year (lbs/yr). This baseline load consists of upstream loads generated outside the assessment unit: a Pennsylvania Upstream Baseline Load (BL_{PA}) of 325,555 lbs/yr, a Double Pipe Creek Upstream Baseline Load (BL_{DPC}) of 201,916 lbs/yr and loads generated within the assessment unit - an MD 8-digit Upper Monocacy River Watershed Baseline Load Contribution of 189,036 lbs/yr. The MD 8-digit_Upper Monocacy River Watershed Baseline Load Contribution is further subdivided into nonpoint source baseline loads (Nonpoint Source BL_{UMR}) and three types of point source baseline loads: regulated Concentrated Animal Feeding Operations (CAFO_{UMR}), National Pollutant Discharge Elimination System (NPDES) regulated stormwater (NPDES Stormwater BL_{UMR}) and regulated process water (Process Water BL_{UMR}) (see Table ES-1). Phosphorus loads from septic systems are considered insignificant. The hydrological relationship amongst the three Monocacy River basin watersheds and the subsequent effect on phosphorus loads are further explained in Appendix C.

The MD 8-digit Upper Monocacy River Average Annual TMDL of Phosphorus is 606,530 lbs/yr. The TMDL consists of allocations attributed to loads generated outside the assessment unit referred to as Upstream Load Allocations: (1) a Pennsylvania Upstream Load Allocation (LA_{PA}) of 300,004 lbs/yr and (2) a Double Pipe Creek Upstream Load Allocation (LA_{DPC}) of 128,328 lbs/yr; and allocations attributed to loads generated within the assessment unit - an MD 8-digit Upper Monocacy River Watershed TMDL Contribution of 178,199 lbs/yr. The MD 8-digit Upper Monocacy River TMDL Contribution is further subdivided into point and nonpoint source allocations and is comprised of a Load Allocation (LA_{UMR}), a CAFO Wasteload Allocation (CAFO WLA_{UMR}), an NPDES Stormwater Wasteload Allocation (NPDES Stormwater WLA_{UMR}), and a Process Water Wasteload Allocation (Process Water WLA_{UMR}) (see Table ES-2).

In addition to the Annual Average TMDL values, a Maximum Daily Load (MDL) for phosphorus is also presented in this document. The calculation of the MDL, which is derived from the TMDL average annual load, is explained in Appendix B and presented in Table B-1.

Overall, this TMDL will establish phosphorus loads that will be protective of the Use III-P/IV-P designations for the Upper Monocacy River watershed, and more specifically, these loads will be at a level the watershed can sustain without causing nutrient related impacts to aquatic health. The TMDL, however, will not completely resolve the impairment to biological communities within the watershed. Because the BSID watershed analysis identifies other possible stressors (*i.e.*, sediment, in-stream habitat, and riparian habitat) as impacting the biological conditions, this impairment remains to be fully addressed through the Integrated Report listing process and the TMDL development process, such that all stressors identified as impacting biological communities in the watershed are reduced to levels that will meet water quality standards, as established in future TMDLs for those substances (MDE 2009a).

Once the EPA has approved this TMDL and it is known what measures must be taken to reduce pollution levels, implementation of best management practices (BMPs) are expected to take place. Section 303(d) of the Clean Water Act and current EPA regulations require reasonable assurance that the TMDL load and wasteload allocations can and will be implemented. The Upper Monocacy River phosphorus TMDL is expected to be implemented in a staged process. Reductions of nitrogen and phosphorus loads will be required to meet the Chesapeake Bay TMDL recently established by EPA (US EPA 2010a). These reductions are necessary to meet water quality standards to protect the designated uses of the Chesapeake Bay and its tidal tributaries, independent of any additional nutrient reductions that may be required to meet existing water quality standards designed to protect aquatic life in local non-tidal waterbodies.

MDE expects that the first stage of implementation of the Upper Monocacy River phosphorus TMDL shall be the achievement of the nutrient reductions needed within the Upper Monocacy River watershed in order to meet target loads consistent with the Chesapeake Bay TMDL, which is expected to be fully implemented in Maryland by 2025. Once the Bay TMDL nutrient target loads for the Upper Monocacy River watershed have been met, MDE will revisit the status of nutrient impacts on aquatic life in Upper Monocacy River, based on any additional monitoring data available and any improvements in the scientific understanding of the impacts of nutrients on aquatic life in free-flowing streams.

Table ES-1: MD 8-digit Upper Monocacy River Baseline Phosphorus Loads (lbs/yr)

Total Baseline				eam Load¹	MD 8-digit Upper Monocacy River Watershed Baseline Load Contribution							d		
Load (lbs/yr)	=	BL_{PA}	+	BL_{DPC}	+	Nonpoint Source BL _{UMR}	+	Septic BL _{UMR}	+	CAFO BL _{UMR}	+	NPDES Stormwater BL _{UMR}	+	Process Water BL _{UMR}
716,507	=	325,555	+	201,916	+	153,714	+	0	+	379	+	24,513	+	10,430

¹Although the Upstream Baseline Load is reported here as a single value, it could include point and nonpoint sources.

Table ES-2: Average Annual MD 8-digit Upper Monocacy River TMDL of Phosphorus (lbs/yr)

					L	A						WLA				
TMDL (lbs/yr)		$\mathbf{L}\mathbf{A}_{\mathbf{P}\mathbf{A}}^{1,2}$	+	LA _{DPC} ³	+	LA _{UMR}	+	Septic _{UMR}	+	CAFO WLA _{UMR}	+	NPDES Stormwater WLA _{UMR}		Process Water WLA _{UMR}	+	MOS
606,530	=	300,004	+	128,328	+	149,673	+	0	+	379	+	23,741	+	4,406	+	Implicit
			~		,											

Upstream Load Allocation²

MD 8-digit Upper Monocacy River Watershed TMDL Contribution

phosphorus reductions because they drain to MD small order streams. See Sections 2.4 and 4.5.

Although for the purpose of this analysis the upstream load is referred to as an LA, it could include loads from point and nonpoint sources.

Table ES-3: MD 8-Digit Upper Monocacy River Baseline Phosphorus Load, TMDL, and Total Reduction Percentage

Baseline Load (lbs/yr)	TMDL (lbs/yr)	Total Reduction (%)
716,507	606,530	15%

¹ LA_{PA} includes both (1) the PA load entering Maryland through the mainstem, which is receiving an allocation based on current loads, and (2) the load from those sections of PA which require phosphorus reductions because they drain to MD small order streams. See Sections 2.4 and 4.5.

³ LA_{DPC}: Double Pipe Creek TMDL, it could include loads from point and nonpoint sources Note: Individual load contributions may not add to total load due to rounding.

1.0 INTRODUCTION

This document, upon approval by the U.S. Environmental Protection Agency (EPA), establishes a Total Maximum Daily Load (TMDL) for total phosphorus (TP) and total nitrogen (TN) in the Upper Monocacy River watershed (basin number 02140303) (2010 *Integrated Report of Surface Water Quality in Maryland* Assessment Unit ID: MD-02140303). Section 303(d)(1)(C) of the federal Clean Water Act (CWA) and the EPA's implementing regulations direct each state to develop a TMDL for each impaired water quality limited segment (WQLS) on the Section 303(d) List, taking into account seasonal variations, critical conditions, and a protective margin of safety (MOS) to account for uncertainty (CFR 2011a). A TMDL reflects the total pollutant loading of the impairing substance a waterbody can receive and still meet water quality standards.

TMDLs are established to determine the pollutant load reductions needed to achieve and maintain water quality standards. A water quality standard is the combination of a designated use for a particular body of water and the water quality criteria designed to protect that use. Designated uses include activities such as swimming, drinking water supply, protection of aquatic life, and shellfish propagation and harvest. Water quality criteria consist of narrative statements and numeric values designed to protect the designated uses. Criteria may differ among waters with different designated uses.

The Maryland Surface Water Use Designation in the Code of Maryland Regulations (COMAR) for the mainstem of the Upper Monocacy River and tributaries is Use IV-P (Water Contact Recreation, Protection of Aquatic Life, Recreational Trout Waters and Public Water Supply) except for Fishing Creek, Hunting Creek, Owens Creek, Tuscarora Creek, and Friends Creek, which are designated as Use III-P (Water Contact Recreation, Protection of Nontidal Cold Water Aquatic Life, and Public Water Supply) (COMAR 2012a,b,c).

The Maryland Department of the Environment (MDE) has identified the waters of the Upper Monocacy River on the State's 303(d) List as impaired by nutrients (1996) and impacts to biological communities (2002) (MDE 2010). All impairments are listed for non-tidal streams. Because scientific research supports that phosphorus is generally the limiting nutrient in freshwater aquatic systems, the 1996 nutrients listing was refined in the 2008 Integrated Report to identify phosphorus as the specific impairing substance (MDE 2008). Therefore, the listed impairment of phosphorus will henceforth be referred to in this report and the term "nutrients" should be read as interchangeable with "phosphorus" in this case.

A data solicitation for nutrients was conducted by MDE in November 2009, and all readily available data up to the time of the TMDL development have been considered. A TMDL for fecal coliform and a TMDL for sediment were approved by the US EPA in 2009. The listing for impacts to biological communities will be addressed separately at a future date.

The objective of this TMDL is to establish phosphorus loads that will be protective of the Aquatic Life Use designation for the Upper Monocacy River watershed. A Biological Stressor Identification (BSID) analysis of Upper Monocacy River (MDE 2011) shows that phosphorus is associated with biological impairments in the Upper Monocacy River watershed, confirming the original 1998 listing; therefore, a TMDL will be established for phosphorus.

Currently in Maryland, there are no specific numeric criteria that quantify the impact of phosphorus on the aquatic health of non-tidal stream systems; therefore, a reference watershed TMDL approach was used, which resulted in the establishment of a *phosphorus loading threshold*. This threshold is based on a detailed analysis of phosphorus loads from watersheds that are identified as supporting aquatic life (*i.e.*, reference watersheds) based on Maryland's biocriteria (Roth *et al.* 1998, 2000; Stribling *et al.* 1998; MDE 2010a). This threshold is then used to determine a watershed specific phosphorus TMDL. The Chesapeake Bay Program's (CBP) Phase 5.3.2 Watershed Model (P5.3.2) is used to determine the nutrient loads in both Upper Monocacy River and the reference watersheds that will be used to set the phosphorus TMDL for Upper Monocacy River.

2.0 SETTING AND WATER QUALITY DESCRIPTION

2.1 General Setting

Location

The Upper Monocacy River watershed is located in the Potomac River Sub-basin in Frederick and Carroll Counties, Maryland (see Figure 1). The Upper Monocacy River is a free-flowing stream that originates in Pennsylvania and flows 58 miles within Maryland where it finally empties into the Potomac River in Maryland. The watershed area within Frederick and Carroll Counties covers 156,638 acres.

The Upper Monocacy River watershed encompasses areas within both Maryland and Pennsylvania; however, the assessment unit identified on the Maryland 303(d) list and consequently addressed by this TMDL consists only of the Maryland portion of the watershed, otherwise referred to as the MD 8-digit Upper Monocacy River watershed. Phosphorus loads generated within the Pennsylvania portion of the watershed as well as the phosphorus load transported via Double Pipe Creek, a tributary to the Upper Monocacy River, are included in the analysis, but will be referred to as upstream loads. The hydrological relationship amongst the three Monocacy River basin watersheds and the subsequent effect on sediment loads are further explained in Appendix C.

Geography/Soils

The MD 8-digit Upper Monocacy River lies within both the Piedmont and Blue Ridge physiographic provinces of Maryland. The Piedmont Plateau Province is located west of the Fall Line and extends to the Catoctin Mountains, with elevations ranging from 400 to 800 feet above sea level. The Blue Ridge Province extends from the Catoctin Mountains to the eastern edge of the Appalachian Mountains, with a maximum elevation of 2000 feet at the Maryland-Pennsylvania border (MGS 2009, MDE 2000).

The Piedmont Plateau Province is composed of hard, crystalline igneous and metamorphic rocks and extends from the inner edge of the Coastal Plain westward to Catoctin Mountain, the eastern boundary of the Blue Ridge Province. The Piedmont Province is an area of rolling uplands with elevations ranging from 100 to 500 feet above sea level. Soils of the Piedmont are derived from crystalline metamorphic rocks and consist of loams and clays with rock fragments and gravel.

The Blue Ridge Province is underlain primarily by folded and faulted sedimentary and igneous rocks. The rocks of the Blue Ridge Province in western Frederick County are exposed in a large anticlinal fold whose limbs are represented by Catoctin Mountain and South Mountain. Soils in the Blue Ridge Province are mountainous soils composed of sandy or stony loams (MGS 2009,MDE 2000).

The soils in the watershed are in the Klinesville, Catoctin, Athol, and Codorus Associations, which are all loamy, mixed, and mesic soil types (USDA 1960, 1969).

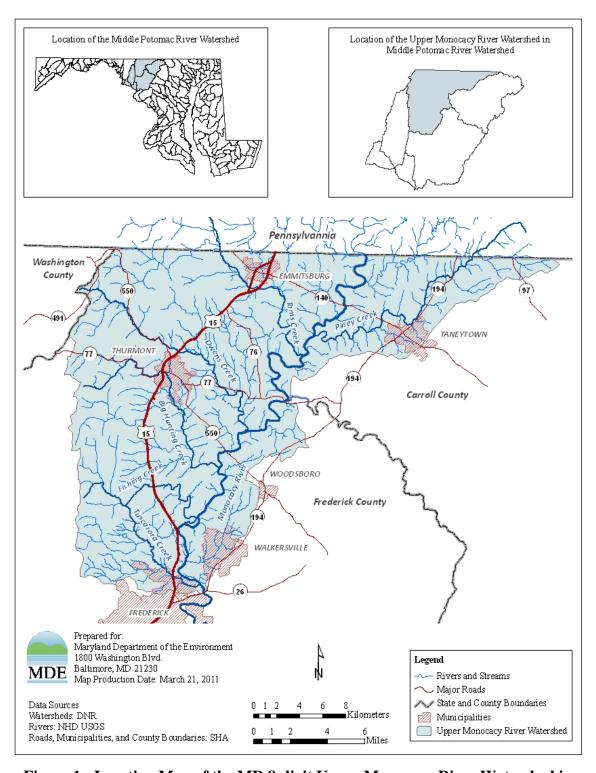


Figure 1: Location Map of the MD 8-digit Upper Monocacy River Watershed in Frederick and Carroll Counties, Maryland

2.1.1 Land-Use

Landuse Methodology

The landuse framework used to develop this TMDL was originally developed for the Chesapeake Bay Program Phase 5.3.2 (CBP P5.3.2) watershed model. The CBP P5.3.2 landuse was based on two distinct stages of development.

The first stage consists of the development of the Chesapeake Bay Watershed Land Cover Data (CBLCD) series of Geographic Information System (GIS) datasets. These datasets provide a 30-meter resolution raster representation of land cover in the Chesapeake Bay watershed, based on sixteen Anderson Level 2 land cover classes. The CBLCD basemap, representing 2001 conditions, was primarily derived from the Multi-Resolution Land Characteristics (MRLC) Consortium's National Land Cover Data (NLCD) and the National Oceanic and Atmospheric Administration's (NOAA) Coastal Change Analysis Program's (CCAP) Land Cover Data. By applying Cross Correlation Analysis to Landsat 5 Thematic Mapper and Landsat 7 Enhanced Thematic Mapper satellite imagery, USGS's contractor, MDA Federal, generated CBLCD datasets for 1984, 1992, and 2006 from the 2001 baseline dataset. The "Chesapeake Bay Phase 5.3" Community Watershed Model" (US EPA 2010b) describes the development of the CBLCD series in more detail. USGS and NOAA also developed an impervious cover dataset from Landsat satellite imagery for the CBLCD basemap, which was used to estimate the percent impervious cover associated with CBLCD developed landuse classes.

The second stage consists of using ancillary information for: 1) the creation of a modified 2006 CBLCD raster dataset and 2) the subsequent development of the CBP P5.3.2 landuse framework in tabular format. Estimates of the urban footprint in the 2006 CBLCD were extensively modified using supplemental datasets. NAVTEQ street data (secondary and primary roads) and institutional delineations were overlaid with the 2006 CBLCD land cover and used to reclassify underlying pixels. Certain areas adjacent to the secondary road network were also reclassified based on assumptions developed by USGS researchers, in order to capture residential development (i.e., subdivisions not being picked up by the satellite in the CBLCD). In addition to spatially modifying the 2006 CBLCD, the following datasets were used to supplement the developed land cover data in the final CBP P5.3.2 landuse framework: U.S. Census housing unit data, Maryland Department of Planning (MDP) Property View data, and estimates of impervious coefficients for rural residential properties (determined via a sampling of these properties using aerial photography). This additional information was used to estimate the extent of impervious area in roadways and residential lots. Acres of construction and extractive land uses were determined independently (Claggett et al. 2012). Finally, in order to develop accurate agricultural landuse acreages, the CBP P5.3.2 incorporated county-level U.S. Agricultural Census data (USDA 1982, 1987, 1992, 1997, 2002). The "Chesapeake"

¹ The EPA Chesapeake Bay Program developed the first watershed model in 1982. There have been many upgrades since the first phase of this model. The CBP P5.3.2 was developed to estimate flow, nutrients, and sediment loads to the Bay.

Bay Phase 5.3 Phase Community Watershed Model" (US EPA 2010b) describes these modifications in more detail.

The result of these modifications is that CBP P5.3.2 landuse does not exist in a single GIS coverage; instead it is only available in a tabular format. The CBP P5.3.2 watershed model is comprised of 30 land uses. Within each general landuse type, most of the subcategories of land uses are differentiated only by their nitrogen and phosphorus loading rates. Table 1 summarizes the acreage of CBP P5.3.2 by sector in the Upper Monocacy River watershed. The landuse acreage is based on the CBP P5.3.2 2009 Progress Scenario, which, for the CBP P5.3.2 model, represents current conditions.

Upper Monocacy River Watershed Landuse Distribution

The Upper Monocacy River watershed landuse was evaluated separately for Maryland and Pennsylvania. The landuse distribution in Maryland consists primarily of forest (44.7%) and crop land (34.0%), followed by regulated urban (13.3%), and pasture (7.1%). All developed land in Maryland is regulated. In Pennsylvania, the landuse also consists primarily of forest (39.4%) and crop land (36.4%), with smaller amounts of non-regulated developed land (17.0%), pasture (6.2%), and regulated urban land (0.8%). A summary of the watershed landuse areas is presented in Table 1, and a landuse map is provided in Figure 2.

Table 1: Landuse Percentage Distribution for Upper Monocacy River Watershed

			Maryla	nd			Pennsylv	ania
General Land-Use	Detailed Land-Use	Area (Acres)	Percent (%)	Grouped Percent of Total	Are (Acr		Percent (%)	Grouped Percent of Total
Forest	Forest	69,320	44.3%	44.7%	56	,798	39.0%	39.4%
rotest	Harvested Forest	697	0.4%	44.770		571	0.4%	39.470
AFOs	Animal Feeding Operations	110	0.1%	0.1%		66	< 0.1%	< 0.1%
CAFOs	Os Concentrated Animal Feeding Operations		< 0.1%	< 0.1%		45	< 0.1%	< 0.1%
Pasture	Pasture	11,111	7.1%	7.1%	8	,963	6.2%	6.2%
Crop	Crop	53,233	34.0%	34.0%	52	,961	36.4%	36.4%
Nursery	Nursery	147	0.1%	0.1%		109	0.1%	0.1%
Non-Regulated Urban	Non-Regulated Developed	0	0.0%	0.0%	24	,803	17.0%	17.0%
	Regulated Construction	361	0.2%			382	0.3%	
Regulated Urban	Regulated Developed	20,380	13.0%	13.3%		0	0.0%	0.8%
	Regulated Extractive	58	< 0.1%			769	0.5%	
Water	er Water		0.8%	0.8%		213	0.1%	0.1%
Total		156,638	100.0%	100.0%	145	,679	100.0%	100.0%

Note: Individual percentages may not add to 100% due to rounding.

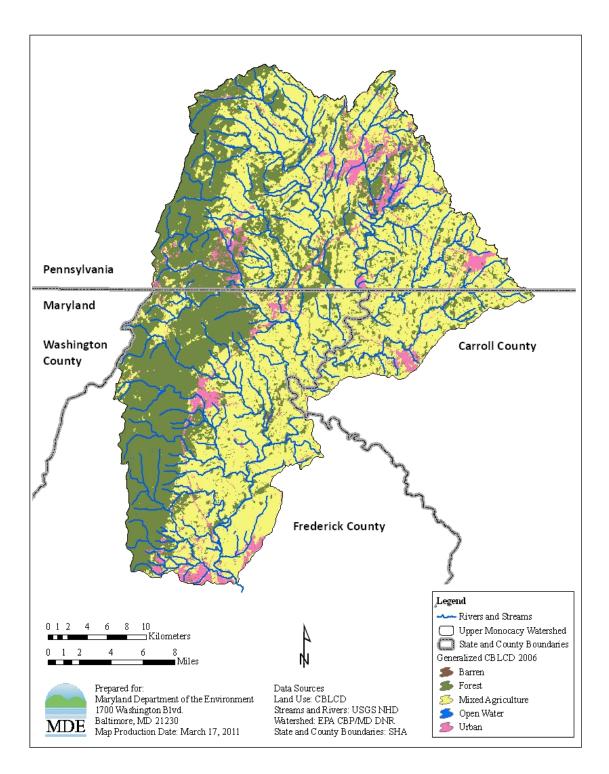


Figure 2: Landuse of the Upper Monocacy River Watershed

2.2 Source Assessment

2.2.1 Nonpoint Sources (NPS) Assessment

Nonpoint source nutrient loads in the Upper Monocacy River watershed are estimated based on the edge-of-stream (EOS) loading rates from the CBP P5.3.2 Model 2009 Progress Scenario. The 2009 Progress Scenario is a simulation of nutrient loading, to the river, using as inputs current land use, BMP implementation and estimated loading rates, precipitation and other meteorological data from the period 1991 – 2000. The period 1991-2000 is the baseline hydrological period for the Chesapeake Bay TMDL.

EOS loads in the P5.3.2 model are determined by three factors: (1) the median of landuse specific loading rates found in the scientific literature; (2) the adjustment of the median loading rate based on the excess nutrient inputs applied to agricultural land uses to determine EOS targets by land segment and land-use; and (3) the application of regional factors in the river calibration.

Literature Review

Using Beaulac and Reckhow's (1982) literature survey as a starting point, CBP staff conducted a survey of the scientific literature to determine the range of observed nutrient loading rates from land uses. Most of these estimates were made from observations on small, homogeneous watersheds and thus represent edge-of-stream, rather than edge-of-field, nutrient loads. Phosphorus loads for developed land uses are based on the median phosphorus concentration in urban stormwater determined by Pitt *et al.* (2005) in their study of monitoring data collected by jurisdictions for their Municipal Separate Storm Sewer System (MS4) permits. See "Chesapeake Bay Phase 5.3 Community Watershed Model" (US EPA 2010b) for further discussion of loading rates found in the scientific literature.

EOS Calibration Targets

Land processes in the P5.3.2 model are simulated by landuse and land segment. Land segments are counties or, in some cases, sections of counties where precipitation is expected to vary because of orographic uplift.

The median literature loading rate is the starting point for determining calibration targets for EOS loads in the P5.3.2 model. For developed land uses, the target load is the product of average annual simulated runoff in the land segment and the median phosphorus concentration in urban stormwater, 0.27 mg/l, as determined by Pitt *et al.* (2005). For agricultural land uses, median rates were adjusted upwards or downwards depending on how much of the amount of nutrients applied to a landuse in a land segment exceeded the needs of the vegetation on that land-use, compared to the average Chesapeake Bay segment. In other words, land segment calibration targets were distributed around the median literature values in proportion to the excess nutrients applied to the segments.

CBP calculated the nutrient loading rates for manure, fertilizer, and atmospheric deposition, as well as crop and vegetative uptake, for each landuse and land segment. These calculations were based on the agricultural census, the expert opinion of local and state agronomists, statistics on fertilizer sales, and a mass balance of animal waste based on animal population estimates. See "Chesapeake Bay Phase 5.3 Phase 5.3 Community Watershed Model" (US EPA 2010b) for further details on the calculation of loading rates. For land uses with nutrient management, EOS loads are determined by reducing nutrient inputs to their agronomic rates on the corresponding landuse without nutrient management.

Table 2 gives the TP EOS targets for non-nutrient management land uses.

Table 2: Target EOS Loading Rates (lbs/ac/yr) by Landuse and County

	Carroll Co.	Frederick Co.	Frederick Co.	Adams Co.	Adams Co.	Franklin Co.
	MD	MD	MD	PA	PA	PA
Land-Use	A24013	A24021	B24021	A42001	B42001	A42055
Forest	0.11	0.10	0.10	0.11	0.10	0.10
Harvested Forest	0.80	0.80	0.80	0.80	0.80	0.80
Degraded Riparian Pasture	13.35	14.77	14.74	11.75	11.73	18.65
Pasture	1.11	1.23	1.23	0.98	0.98	1.55
Alfalfa	0.70	0.70	0.70	0.70	0.70	0.70
Hay Without Nutrients	0.40	0.40	0.40	0.40	0.40	0.40
Hay With Nutrients	0.72	0.64	0.63	1.55	1.54	1.49
High Till Without Manure	2.70	2.69	2.68	2.77	2.76	2.74
High Till With Manure	2.02	2.00	1.99	2.28	2.27	2.20
Low Till With Manure	2.01	1.99	1.98	2.26	2.25	2.18
Nursery	85.00	85.00	85.00	85.00	85.00	85.00
Regulated Extractive	3.50	3.50	3.50	3.50	3.50	3.50
Regulated Construction	7.00	7.00	7.00	7.00	7.00	7.00
Regulated Impervious Developed	2.14	2.04	2.15	2.17	2.38	2.11
Regulated Pervious Developed	0.51	0.48	0.53	0.74	1.07	0.45
Non-regulated Impervious Developed	N/A	N/A	N/A	2.17	2.38	2.11
Non-regulated Pervious Developed	N/A	N/A	N/A	0.74	1.07	0.45

Nutrient simulations for specific land uses are calibrated against these targets on a per acre basis over the simulation period 1985-2005. The phosphorus loads from these simulations are multiplied by a time-variable representation of the landuse acreage in each watershed, and the impact of changing levels of BMP implementation are also simulated over the 21-year calibration period. The resulting loads are used as the initial EOS inputs to the river simulation. During the calibration of the river simulation, the EOS loads are adjusted by regional factors, as explained below.

Regional Factors

The use of literature loading rates and their adjustment according to the excess nutrients applied to the land can be expected to provide a good estimate of landuse loading rates relative to each other. To further reduce uncertainty in loading rates, CBP applies a multiplicative regional factor to the simulated land segment loading rate. Regional factors are calculated in the calibration of river segments, where simulated output is compared to observed monitoring data.

Regional factors are calculated on a river segment basis. The regional factor is 1.440 for the portion of the watershed upstream of Bridgeport and 1.463 for the portion below Bridgeport.

2.2.2 Point Source (PS) Assessment

A list of active NPDES permitted point sources that contribute to the phosphorus load in the Upper Monocacy River watershed was compiled using MDE's permits database. The types of permits identified include individual industrial, individual municipal, general mineral mining, general industrial stormwater, general municipal separate storm sewer systems (MS4s), and general Concentrated Animal Feeding Operations (CAFOs).

The types of NPDES permits can be grouped into three categories: (1) process water, (2) and stormwater, and (3) CAFOs. In turn, process water permits can be divided into permits for municipal wastewater treatment plants (WWTPs) and permits for industrial facilities. Permits for major municipal WWTPs (*i.e.*, WWTPs with design flow equal to or larger than 0.5 MGD are considered major) and major industrial facilities contain flow and TP limits; their current nutrient loads are calculated from discharge monitoring reports (DMR) data. There are ten municipal WWTPs permitted to discharge phosphorus in the watershed; three of them are major facilities. The remaining process water facilities in the watershed are minor municipal and industrial facilities, which have smaller flows and consequently smaller nutrient loads. There are seven industrial facilities capable of discharging phosphorus, none of which are considered major facilities. Baseline phosphorus loads for minor municipal WWTPs are based on DMR data, while current loads for minor industrial facilities were based either from monitoring required by their permits or professional judgment.

Table 3 lists the process-water facilities with active permits within the Upper Monocacy River watershed and their estimated baseline loads. Loads for major municipal and major industrial facilities are given on an individual basis; however, loads for all minor municipal and industrial facilities in the watershed are presented as one aggregate load. All these facilities with their estimated loads are represented in the Phase 5.3.2 Watershed Model 2009 Progress Scenario. The total estimated 2009 MD process-water TP load is 10,430 lbs/yr.

Table 3: 2009 Annual Phosphorus Loads for MD Facilities in Upper Monocacy River Watershed Represented in Phase 5 Watershed Model

NPDES #	Facility Name	WIA	ТҮРЕ	2009 TP Load (lbs/yr)
MD0020257	EMMITSBURG WWTP	WLA		2,977
MD0020672	TANEYTOWN WWTP	-	Individual	3,697
MD0021121	THURMONT WWTP			845
MD0022683	CRESTVIEW ESTATES WWTP	-		
MD0022900	LEWISTOWN SCHOOL WWTP	Municipal		
MD0023230	MOUNT SAINT MARY'S UNIVERSITY	Municipal		
MD0023922	VICTOR CULLEN CENTER WWTP			
MD0025089	WHITE ROCK WWTP	ı		
MD0025119	FOXVILLE US NAVAL SUPPORT WWTP			
MD0058050	SHAMROCK RESTAURANT		Aggregate	2.012
MD0050245	SHUFF'S MEAT MARKET, INC.			2,912
MD0052345	REDLAND BRICK, INC.			
MD2637K00	HUNTING CREEK FISHERIES			
MDG344550	WALSH FUEL	Industrial		
MDG766135	KNOTT ATHLETIC COMPLEX			
MDG766215	OLE MINK FARM REC. RESORT			
MDG912397	SHEETZ STORE # 132			
	Total			10,430

In Maryland's jurisdictions with Phase I and/or Phase II MS4 permits, all urban stormwater from developed land is regulated under the NPDES MS4 program. Urban stormwater loads are calculated using urban landuse in the watershed. The stormwater permits do not include nutrient limits, but are regulated instead based on programmic approaches. The current estimated MD stormwater TP load is 24,513 lbs/yr.

Starting in 2009, Maryland began the process of permitting Concentrated Animal Feeding Operations (CAFOs). CAFOs are medium to large animal feeding operations that have some artificial conveyance like a swale or ditch to discharge runoff from feedlots to surface water. Recent EPA regulations require CAFOs to have a NPDES permit. Maryland also designates large animal feeding operations which do not discharge or propose to discharge as "Maryland Animal Feeding Operations" (MAFOs). It is anticipated that on review many MAFOs will require CAFO permits.

Several operators in the Upper Monocacy River watershed have filed notices of intent (NOI) to apply for permits under Maryland's CAFO or MAFO regulations. Based on the NOIs filed by the reporting deadline of February, 2009, CBP estimates that the current average annual phosphorus load from CAFOs in the Upper Monocacy River watershed is 379 lbs/yr.

2.2.3 Overall Phosphorus Budget

Table 4 lists the current overall phosphorus budget for the Upper Monocacy River watershed in Maryland and Pennsylvania. These loads are derived from the P5.3.2 2009 Progress Scenario, which represents current land-use, loading rates, and BMP implementation simulated using precipitation and other meteorological inputs from the period 1991-2000 to represent variable hydrological conditions. In Maryland, the largest source of phosphorus is crop land (50.1%). Other phosphorus sources include regulated urban land (13.0%), pasture (10.6%), nurseries (10.3%), forest (6.0%), point sources (5.5%), and animal feeding operations (AFOs and CAFOs) (4.0%). In Pennsylvania, most of the phosphorus load stems from agricultural related activities including crops (50.9%), animal feeding operations (AFOs and CAFOs) (13.6%), pasture (6.1%), and nurseries (4.3%). Other phosphorus sources include non-regulated urban land (10.3%), point sources (9.3%), regulated urban land (2.6%), and forest (3.0%). There are no combined sewer overflows (CSOs) in the Upper Monocacy River watershed, and phosphorus loads from septic systems are considered insignificant. Table 5 summarizes the Upper Monocacy River Baseline Phosphorus Load, reported in pounds per year (lbs/yr), and presented in terms of Baseline Load Contribution from nonpoint and point source loadings.

Table 4: Upper Monocacy River Watershed Detailed Baseline Total Phosphorus Loads

			Marylan	d	Pennsylvania			
				Grouped			Grouped	
		Load	Percent	Percent	Load	Percent	Percent	
General Land-Use	Detailed Land-Use	(lbs/yr)	(%)	of Total	(lbs/yr)	(%)	of Total	
Earast	Forest	10,983	5.8%	6.0%	9,051	2.8%	3.0%	
Forest	Harvested Forest	452	0.2%	0.0%	741	0.2%	3.0%	
AFOs	Animal Feeding Operations	7,225	3.8%	3.8%	25,259	7.8%	7.8%	
CAFOs	Concentrated Animal Feeding Operations	379	0.2%	0.2%	18,770	5.8%	5.8%	
Pasture	Pasture	20,055	10.6%	10.6%	19,726	6.1%	6.1%	
Crop	Crop	94,801	50.1%	50.1%	165,611	50.9%	50.9%	
Nursery	Nursery	19,460	10.3%	10.3%	13,891	4.3%	4.3%	
Non-Regulated Urban	Non-regulated Developed	0	0.0%	0.0%	33,593	10.3%	10.3%	
	Regulated Construction	2,376	1.3%		4,212	1.3%		
Regulated Urban	Regulated Developed	21,809	11.5%	13.0%	0	0.0%	2.6%	
	Regulated Extractive	328	0.2%		4,413	1.4%		
Septic	Septic	0	0%	0%	0	0%	0%	
CSO	CSO	0	0%	0%	0	0%	0%	
Daint Carres	Industrial Point Sources	43	< 0.1%	5.50/	3,323	1.0%	0.20/	
Point Sources	Municipal Point Sources	10,387	5.5%	5.5%	26,831	8.2%	9.3%	
Atmospheric Deposition	Non-tidal Atmospheric Deposition	737	0.4%	0.4%	134	< 0.1%	< 0.1%	
	Total	189,036	100%	100%	325,555	100%	100%	

Note: Individual loads may not add to totals and percentages may not add to 100%; in both cases due to rounding.

MD 8-digit Upper Monocacy River Watershed **Upstream** Total Baseline Load¹ **Baseline Load Contribution Baseline** Process Nonpoint **NPDES** Load Septic **CAFO BL**_{PA} BL_{DPC} Source Stormwater Water (lbs/yr) BL_{UMR} $BL_{UMR} \\$ BL_{UMR} BL_{UMR} BL_{UMR} 716,507 325,555 201,916 153,714 0 379 24,513 10,430

Table 5: MD 8-digit Upper Monocacy River Baseline Phosphorus Loads

2.3 Water Quality Characterization

The MD 8-digit Upper Monocacy River watershed was originally listed on Maryland's 1996 303(d) List as impaired by nutrients. The listing implies that the nutrient impairment was based on the watershed's contribution to the impairment of Chesapeake Bay (MDE 2004, DNR 1996).

A water quality standard is the combination of a designated use for a particular body of water and the water quality criteria designed to protect that use. Designated uses include support of aquatic life, primary or secondary contact recreation, drinking water supply, and shellfish propagation and harvest. Water quality criteria consist of narrative statements and numeric values designed to protect the designated uses. The criteria developed to protect the designated use may differ and are dependent on the specific designated use(s) of a waterbody.

The Maryland Surface Water Use Designation in the Code of Maryland Regulations (COMAR) for the mainstem of the Upper Monocacy River and tributaries is Use IV-P (Water Contact Recreation, Protection of Aquatic Life, Recreational Trout Waters and Public Water Supply) except for Fishing Creek, Hunting Creek, Owens Creek, Tuscarora Creek, and Friends Creek, which are designated as Use III-P (Water Contact Recreation, Protection of Nontidal Cold Water Aquatic Life, and Public Water Supply) (COMAR 2012a,b,c).

Currently, there are no specific numeric criteria for nutrients in Maryland's water quality standards for the protection of aquatic life in free-flowing non-tidal waters. MDE has developed a biological stressor identification (BSID) analysis to identify potential stressors of aquatic life, including nutrients, in 1st through 4th order streams assessed by the Maryland Biological Stream Survey (MBSS). The impact of excess nutrients on smaller-order streams in the watershed will be evaluated on the basis of the BSID analysis, which provides necessary and sufficient conditions for determining whether phosphorus is a potential stressor of the biological community in smaller-order streams.

¹Although the Upstream Baseline Load is reported here as a single value, it could include point and nonpoint sources.

Low levels of dissolved oxygen are sometimes associated with the decay of excess primary production and therefore nutrient over-enrichment. The dissolved oxygen (DO) concentration to protect Use I-P waters "may not be less than 5 milligrams per liter (mg/l) at any time," and to protect Use III-P waters "may not be less than 5 mg/l at any time, with a minimum daily average of not less than 6 mg/l" (COMAR 2012d).

A data solicitation for information pertaining to pollutants, including nutrients, in the Upper Monocacy River watershed was conducted by MDE in November 2009 and all readily available data from 1998 up to the time of the data solicitation were considered. MDE conducted surveys along the Upper Monocacy River from October 2000 through October 2004. The Department of Natural Resources (DNR) collected data in the watershed from January 1998 through June 2007. Data from Maryland Biological Stream Survey (MBSS) sampling conducted in March and April 2000; March 2001; March 2003; and March 2004 were also used. Figures 4 through 6 provide graphical representation of the collected data for the parameters discussed below.

Upper Monocacy River Watershed Monitoring Stations

A total of 56 water quality monitoring stations were used to characterize the Upper Monocacy River Watershed. There were 31 biological/physical habitat monitoring stations from the MBSS program and two biological monitoring stations from the Maryland CORE/TREND monitoring network. MDE sampled at the two CORE/TREND stations and at 23 additional locations. The stations are listed in Table 6 and presented in Figure 3.

Table 6: Monitoring Stations in the Upper Monocacy River Watershed

Site Number	Cnoncon	Site Tyme	Stream Name	Latitude	Longitude
Site Number	Sponsor	Site Type	Stream Name	(dec degree)	(dec degree)
FIS0004	MDE		Fishing Creek	39.507420	-77.386050
FIS0012	MDE		Fishing Creek	39.511450	-77.384850
HUN0009	MDE		Big Hunting Creek	39.552917	-77.373600
MON0269	MDE		Monocacy River	39.479930	-77.388280
MON0299	MDE		Monocacy River	39.507080	-77.377300
MON0355	MDE		Monocacy River	39.563550	-77.351830
MON0417	MDE		Monocacy River	39.603370	-77.293350
MON0468	MDE		Monocacy River	39.630630	-77.288420
MON0528	MDE		Monocacy River	39.679170	-77.234886
MON0575	MDE		Monocacy River	39.714383	-77.215783
MTM0011	MDE		Middle Creek	39.699700	-77.296800
OWN0007	MDE		Owens Creek	39.585467	-77.335250
PIN0000	MDE		Piney Creek	39.655600	-77.264950
PIN0043	MDE		Piney Creek	39.660980	-77.221050
PIN0062	MDE		Piney Creek	39.669030	-77.197470
SMU0001	MDE		Saint Mary Run	39.690980	-77.323430
SMU0011	MDE		Saint Mary Run	39.681880	-77.342220
SMU0012	MDE		Saint Mary Run	39.681370	-77.343500
TOM0011	MDE		Toms Creek	39.648230	-77.288930
TOM0038	MDE		Toms Creek	39.671650	-77.300450
TOM0062	MDE		Toms Creek	39.691550	-77.322980

TUS0007	MDE		Tuscarora Creek	39.458133	-77.387750
TUS0018	MDE		Tuscarora Creek	39.464150	-77.401720
MON0269	MD DNR	CORE	Monocacy River	39.479930	-77.388280
MON0528	MD DNR	CORE	Monocacy River	39.679170	-77.234886
UMON-101-C-2000	MD DNR	MBSS	Little Fishing Creek	39.536388	-77.467501
UMON-101-C-2001	MD DNR	MBSS	Little Fishing Creek	39.536388	-77.467501
UMON-101-R-2000	MD DNR	MBSS	Little Hunting Creek UT1	39.566897	-77.430497
UMON-103-R-2000	MD DNR	MBSS	Monocacy River UT3	39.643403	-77.262961
UMON-106-R-2000	MD DNR	MBSS	Glade Creek	39.517010	-77.339654
UMON-115-R-2000	MD DNR	MBSS	Sandy Run	39.553767	-77.446004
UMON-117-R-2000	MD DNR	MBSS	Graceham Run	39.597846	-77.390723
UMON-119-R-2000	MD DNR	MBSS	Buzzard Branch	39.586364	-77.491476
UMON-119-S-2002	MD DNR	MBSS	Buzzard Branch	39.586363	-77.491475
UMON-119-S-2003	MD DNR	MBSS	Buzzard Branch	39.586363	-77.491475
UMON-119-S-2004	MD DNR	MBSS	Buzzard Branch	39.586363	-77.491475
UMON-128-R-2000	MD DNR	MBSS	High Run	39.608331	-77.456667
UMON-131-R-2000	MD DNR	MBSS	Creagers Branch	39.581126	-77.357901
UMON-132-R-2000	MD DNR	MBSS	Steep Creek UT1	39.547389	-77.493030
UMON-134-R-2000	MD DNR	MBSS	Turkey Creek	39.699998	-77.374447
UMON-197-E-2004	MD DNR	MBSS	Piney Creek UT3	39.648380	-77.181181
UMON-202-C-2000	MD DNR	MBSS	Clifford Branch	39.489720	-77.473613
UMON-202-C-2001	MD DNR	MBSS	Clifford Branch	39.489720	-77.473613
UMON-207-R-2000	MD DNR	MBSS	Little Hunting Creek	39.566742	-77.421174
UMON-221-R-2000	MD DNR	MBSS	Hunting Creek	39.609475	-77.410470
UMON-229-R-2000	MD DNR	MBSS	Muddy Run	39.599675	-77.412899
UMON-230-R-2000	MD DNR	MBSS	Hunting Creek	39.622905	-77.414784
UMON-288-S-2000	MD DNR	MBSS	High Run	39.609740	-77.415614
UMON-288-S-2001	MD DNR	MBSS	High Run	39.609740	-77.415614
UMON-288-S-2002	MD DNR	MBSS	High Run	39.609740	-77.415614
UMON-288-S-2003	MD DNR	MBSS	High Run	39.609740	-77.415614
UMON-288-S-2004	MD DNR	MBSS	High Run	39.609740	-77.415614
UMON-304-R-2000	MD DNR	MBSS	Friends Creek	39.714754	-77.403136
UMON-310-R-2000	MD DNR	MBSS	Piney Creek	39.696338	-77.152385
UMON-322-R-2000	MD DNR	MBSS	Hunting Creek	39.598806	-77.405229
UMON-413-R-2000	MD DNR	MBSS	Toms Creek	39.691823	-77.324691

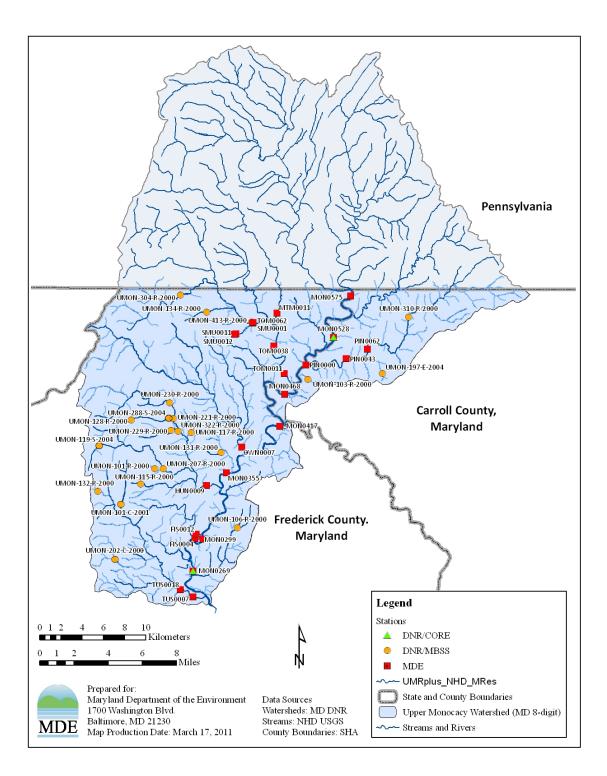


Figure 3: Monitoring Stations in the Upper Monocacy River Watershed

2.3.1 Biological Stressor Identification (BSID) Analysis

MDE has developed a biological assessment methodology to support the determination of proper category placement for 8-digit watershed listings in the State's Integrated Report.

The BSID methodology uses data available from the statewide Maryland Department of Natural Resources (MDDNR) Maryland Biological Stream Survey (MBSS). The current MDE biological assessment methodology is a three-step process: (1) a data quality review, (2) a systematic vetting of the dataset, and (3) a watershed assessment that guides the assignment of biological stressors to Integrated Report categories.

The BSID analysis for the Upper Monocacy River watershed identified both phosphorus and nitrogen as a potential stressors. Both total phosphorus and orthophosphate show a significant association with degraded biological conditions. As much as 33% of the biologically impacted stream miles in the watershed are associated with high total phosphorus and 33% are associated with high orthophosphate.

Similarly, according to the BSID analysis, 20% of the biologically impacted stream miles in the Upper Monocacy River watershed are associated with high total nitrogen concentrations. Based on the results of the analysis, the BSID report concludes that nitrogen and phosphorus are associated with impairments to aquatic life or biological communities in the Upper Monocacy River watershed. The indirect impact of nutrients on nontidal aquatic systems is complex and the science continues to evolve. While DO was not found to be associated with poor biological conditions, there could be confounding effects such as increased primary production resulting in periphyton growth and also diurnal fluctuations. At this time, both the original 1998 listing and the initial BSID analysis point to nutrients in general and phosphorus in particular, as a biological stressor in the Upper Monocacy River.

For details on the BSID analysis, please refer to the documents "Draft Watershed Report for Biological Impairment of the Upper Monocacy River Watershed in Carroll and Frederick Counties, Maryland - Biological Stressor Identification Analysis Results and Interpretation" (MDE 2011) and "Maryland Biological Stressor Identification Process" (MDE 2009a)...

2.3.2 Dissolved Oxygen

DNR CORE/TREND samples were taken in the Upper Monocacy River watershed from January 1998 through June 2007 and MBSS samples were taken in the summers of 2000 through 2004. MDE sampled from October 2000 through October 2004. Samples taken during the growing season (May through October) show DO concentrations ranging from 4.3 to 12.9 mg/l, with only 8 out of 344 (*i.e.*, 2.3 %) samples below the DO criterion of 5.0 mg/l. These data are presented graphically in Figure 4. In Fishing Creek, Hunting Creek, Owens Creek, and Friends Creek, where the Use III-P DO criteria apply, only 3 out of 83 (*i.e.*, 3.5%) samples had DO concentrations of less than 6 mg/l.

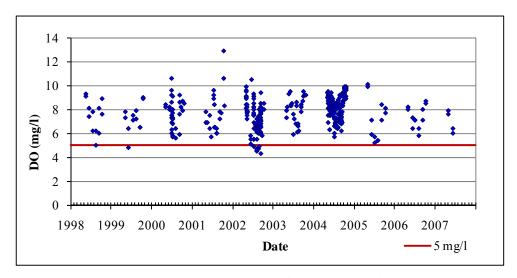


Figure 4: Upper Monocacy River Dissolved Oxygen Data from 1998 through 2007

2.3.3 Nutrients

In the absence of State water quality standards with specific numeric limits for nutrients for the protection of aquatic life in non-tidal free-flowing waters, evaluation of potentially eutrophic conditions is based on the BSID analysis and analysis of dissolved oxygen levels. Consequently, the nutrients data presented in this section are for informational purposes only.

Total nitrogen (TN) and total phosphorus (TP) data for the Upper Monocacy River have been collected as part of this study and the results are presented here for informational purposes. During the growing season DNR and MDE, have total nitrogen (TN) concentrations ranging from 0.5 to 25.4 mg/l and total phosphorus (TP) concentrations ranging from 0.01 to 3.97 mg/l. These data are presented graphically in Figures 5 and 6.

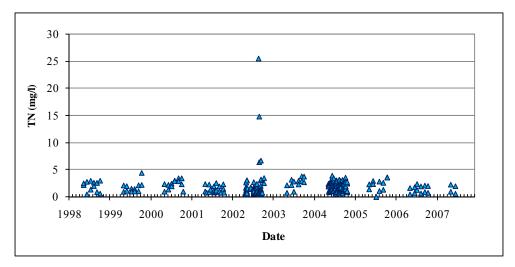


Figure 5: Upper Monocacy River Total Nitrogen Data from 1998 through 2007

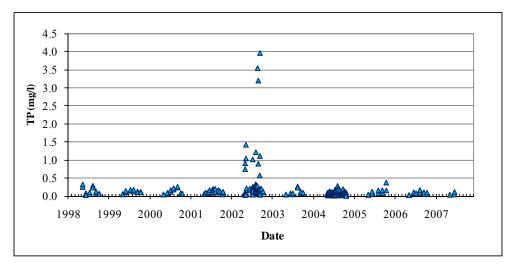


Figure 6: Upper Monocacy River Total Phosphorus Data from 1998 through 2007

2.3.4 Nutrient Limitation

Nitrogen and phosphorus are essential nutrients for algae growth. If one nutrient is available in great abundance relative to the other, then the nutrient that is less available limits the amount of plant matter that can be produced; this is known as the "limiting nutrient." The amount of the abundant nutrient does not matter because both nutrients are needed for algae growth. In general, a total nitrogen:total phosphorus (TN:TP) ratio in the range of 5:1 to 10:1 by mass is associated with plant growth being limited by neither phosphorus nor nitrogen. If the TN:TP ratio is greater than 10:1, phosphorus tends to be limiting; if the TN:TP ratio is less than 5:1, nitrogen tends to be limiting (Chiandani *et al.* 1974).

Although over 80% of the samples collected in the Upper Monocacy River watershed 1998-2007 have TN:TP ratios above 10, about 6% of the samples have ratios below 5.

Low TN:TP samples are more prevalent in the growing season: almost 30% of the samples have ratios below 10, although less than 3% have ratios below 5. In contrast, only one of the 31 samples collected by MBSS had a TN:TP less than 10 and none had a ratio less than 5. The median TN:TP ratio for MBSS samples was 40 and the average ratio was 77.

The significant fraction of samples with TN:TP ratios below 10 seems to be a function of the large number of samples collected under the extremely low flow conditions in 2002. Significant denitrification occurs under extremely low flows, reducing TN:TP ratios (Borchardt 1996). The effect is compounded in the Upper Monocacy River mainstem and some of the larger tributaries because under extremely low flow conditions, much of the flow is derived from WWTPs which tend to have low TN:TP ratios. Nearly 35% of the samples taken in tributaries during the growing season have TN:TP ratios below 10; 12% have ratios below 5. All of the samples with ratios below 5, and all but three of the samples with ratios below 10, were collected under the extremely dry conditions in 2002. When samples from 2002 are excluded, less than 5% of the samples have ratios below 10 and none have ratios below 5; the median ratio is 27 and the average is 38, indicating that outside of extremely low flow conditions, the tributaries and smaller order streams in the Upper Monocacy River are predominately phosphorus limited.

The conjunction of this analysis with the analysis of the TN:TP ratios from MBSS samples strongly supports the conclusion that phosphorus is the limiting nutrient in the tributaries and smaller order streams in the Upper Monocacy River watershed.

2.3.5 Upper Monocacy River Benthic Macroinvertebrate Monitoring Stations

Additional data for the Upper Monocacy River watershed were obtained from the Maryland Department of Natural Resources (DNR) CORE/TREND Program. The program collected benthic macroinvertebrate data between 1976 and 2006. DNR has extensive monitoring information for two stations in the mainstem of the MD 8-digit Upper Monocacy River through the CORE/TREND Program. The stations are located on Biggs Ford Road (MONO269) and on Route 140 (MONO528) (see Figure 4 and Table 5). These stations have between 21 and 28 years of benthic macroinvertebrate data (DNR 2007, 2009). These data were used to calculate four benthic community measures: total number of taxa, the Shannon-Wiener diversity index, the modified Hilsenhoff biotic index, and percent *Ephemeroptera*, *Plecoptera*, *and Trichoptera* (EPT). A summary of the results for each of the stations is presented in Table 7.

Table 7: Upper Monocacy River DNR Core Data

Site Number	Current Water Quality Status	Trend Since 1970's			
MONO269	Good/Very Good	No Change			
MONO528	Good/Very Good	Moderate Improvement			

2.4 Water Quality Impairment

The Maryland Surface Water Use Designation in the Code of Maryland Regulations (COMAR) for the mainstem of the Upper Monocacy River and tributaries is Use IV-P (*Water Contact Recreation, Protection of Aquatic Life, Recreational Trout Waters and Public Water Supply*) except for Fishing Creek, Hunting Creek, Owens Creek, Tuscarora Creek, and Friends Creek, which are designated as Use III-P (*Water Contact Recreation, Protection of Nontidal Cold Water Aquatic Life and Public Water Supply*) (COMAR 2012a,b,c). The nutrient water quality impairment of the Upper Monocacy River watershed addressed by this TMDL is caused by elevated nutrient loads beyond a level that is supportive of aquatic health, where aquatic health is evaluated based on BIBI and FIBI scores (BIBI and FIBI ≥ 3). The BSID has identified total phosphorus as associated with 33% of the biologically impaired stream miles in the Upper Monocacy River watershed, orthophosphate as associated with 33% of the impaired stream miles, and total nitrogen as associated with 20% of the impaired stream miles.

The analysis of DO monitoring data in section 2.3.1 indicates that DO criteria are currently met in the watershed.

Biological results from the two DNR CORE/TREND stations along the mainstem of Upper Monocacy River indicate that mainstem water quality can be classified as Good to Very Good. Statistical analysis of the long-term CORE/TREND data indicates that since 1976, both stations have shown improvement and are ranked as having good water quality based on percent EPT, taxa number, biotic index, and diversity index (DNR 2009).

Because all biological monitoring results on the Upper Monocacy River mainstem indicate the mainstem is supporting its aquatic life use, MDE therefore concludes the nutrient impairment is only within the lower order (smaller) streams in the Maryland portion of the watershed. Reductions in phosphorus loads from point and nonpoint sources discharging in to lower order streams will be required to address this impairment. Pennsylvania's portion of the watershed, therefore, will be divided into two sections: (1) the section of the watershed in Pennsylvania which enters Maryland only through mainstem Upper Monocacy River, upstream of MON0528 (see Figure 3),will receive an informational TMDL based on current loading conditions, while (2) the section of Pennsylvania's portion of the watershed which drains into Maryland's lower order streams downstream of MON0528 will require reductions in phosphorus loads to address the impairment.

The BSID has also indicated that high concentrations of total nitrogen are associated with biological impairment in the Upper Monocacy River watershed. The 1996 nutrients listing was refined in Maryland's 2008 Integrated Report to a listing for phosphorus as the specific impairing nutrient substance. The revised listing was based on the generally accepted view within the scientific community that in fresh water phosphorus is usually

the limiting nutrient for algal growth (Allan 1995, Correll 1998). The analysis of observed TN:TP ratios in Section 2.3.4 confirms the assumption that phosphorus is the limiting nutrient in lower order streams in Upper Monocacy River. Because nitrogen generally exists in quantities greater than necessary to sustain algal growth, excess nitrogen *per se* is not the cause of the biological impairment in Upper Monocacy River, and the reduction of nitrogen loads would not be an effective means of ensuring that the Upper Monocacy River watershed is free from impacts on aquatic life from eutrophication. Therefore, load allocations for the Upper Monocacy River Nutrient TMDL will apply only to total phosphorus. Reductions in nitrogen loads will be required in the Upper Monocacy River watershed to meet the nitrogen allocations assigned to the Potomac Tidal Fresh Bay Water Quality Segment by the Chesapeake Bay TMDL, established by the EPA on December 29, 2010.

3.0 TARGETED WATER QUALITY GOAL

The objective of the phosphorus TMDL established herein is to reduce phosphorus loads, and subsequent effects on aquatic health, in the Upper Monocacy River watershed to levels that support the Use III-P/Use IV-P designations (*Water Contact Recreation*, *Protection of Nontidal Cold Water Aquatic Life, and Public Water Supply*; *Water Contact Recreation, Protection of Aquatic Life, Recreational Trout Waters and Public Water Supply*) (COMAR 2012a,b,c). Assessment of aquatic health is based on Maryland's biocriteria protocol, which evaluates both the amount and diversity of the benthic and fish community through the use of the Index of Biotic Integrity (IBI) (Roth *et al.* 1998, 2000; Stribling *et al.* 1998). Reduction in phosphorus loads are expected to result in improved benthic and fish communities, by either improving habitat conditions or restoring energy pathways to patterns to those typical of healthy biological communities in the Piedmont and Highland ecoregions.

Currently in Maryland, there are no specific numeric criteria that quantify the impact of nutrients on the aquatic health of non-tidal stream systems; therefore, a reference watershed TMDL approach was used. Phosphorus loads compatible with water quality standards are determined by comparing current phosphorus loading rates (lbs/ac/yr) in the Upper Monocacy River watershed with the nutrient loading rates in unimpaired watersheds in the Piedmont and Highland ecoregions of Maryland. The Chesapeake Bay Program's (CBP) Phase 5.3.2 Watershed Model (P5.3.2) will be used to determine the phosphorus loads in both Upper Monocacy River and the unimpaired watersheds that will be used to set the phosphorus TMDL for Upper Monocacy River.

Overall, this TMDL will establish phosphorus loads that will be protective of the Use III-P/Use IV-P designations for the Upper Monocacy River watershed, and more specifically, these loads will be at a level the watershed can sustain without causing nutrient related impacts to aquatic health. The TMDL, however, will not completely resolve the impairment to biological communities within the watershed. Because the BSID watershed analysis identifies other possible stressors (*i.e.*, sediment, in-stream habitat, and riparian habitat) as impacting the biological conditions, this impairment remains to be fully addressed through the Integrated Report listing process and the TMDL development process, such that all impairing substances identified as impacting biological communities in the watershed are reduced to levels that will meet water quality standards, as established in future TMDLs for those substances (MDE 2009a).

4.0 TOTAL MAXIMUM DAILY LOADS AND SOURCE ALLOCATION

4.1 Overview

This section describes how the phosphorus TMDL and load allocations (LA) were developed for Upper Monocacy River. Section 4.2 describes the analysis framework for estimating phosphorus loading rates and the assimilative capacity of the watershed stream system. Section 4.3 summarizes the scenarios that were used in the analysis and presents results. Section 4.4 discusses critical conditions and seasonality. Section 4.5 explains the calculations of TMDL loading caps. Section 4.6 details the load allocations, and Section 4.7 explains the rationale for the margin of safety. Finally, Section 4.8 summarizes the TMDL.

4.2 Analysis Framework

Because there are no specific numeric criteria that quantify the impact of nutrients on the aquatic health of nontidal stream systems, a reference watershed approach will be used to establish the TMDL. Furthermore, as the BSID analysis established a link between biological impairment and nutrient related stressors, the reference watershed approach will utilize a biological endpoint.

Based on the analysis in Section 2.4, the mainstem of the Upper Monocacy River is not impaired. The portion of the watershed in Pennsylvania upstream of MON0528, which enters Maryland through mainstem Upper Monocacy River, will receive an informational TMDL based on current loading conditions. Maryland's portion of the Upper Monocacy River watershed and Pennsylvania's portion of the watershed that drains into Maryland's smaller order streams downstream of MON0528 will require reductions in phosphorus loads.

Watershed Model

An essential element in the reference watershed approach is the use of a computer simulation model to determine the current or baseline loads in the impaired and reference watersheds. These loads are used to calculate the loading rate in the reference watershed and therefore the TMDL load allocations for the impaired watershed. For the Upper Monocacy River phosphorus TMDL, and other nutrient TMDLs for Maryland's non-tidal watersheds, the CBP Phase 5.3.2 Watershed Model will be used to determine phosphorus loads in both the impaired and reference watersheds.

The CBP P5.3.2 model is a Hydrological Simulation Program FORTRAN (HSPF) model of Maryland, Virginia, and the portions of Pennsylvania, Delaware, New York, and West Virginia in the Chesapeake Bay basin. Its primary purposes are: (1) to determine the sources of nitrogen, phosphorus, and sediment to the Chesapeake Bay, (2) to calculate nutrient and sediment loads to the Chesapeake Bay for use in the CBP water quality and sediment transport model, and (3) to estimate nutrient and sediment load allocations under nutrient and sediment TMDLs for impaired Chesapeake Bay segments. Generally, river reaches that have average annual flows greater than 100 cubic feet per second (cfs)

are represented in the model, but MDE has worked with CBP to ensure that all of MD's 8-digit watersheds, the unit of water quality assessment in MD, are represented in the model.

Bicknell *et al.* (2001) describe the HSPF model in greater detail. (US EPA 2010b) documents the development of the Phase 5 Watershed Model.

An important aspect of the P5.3.2 model is that it imposes a uniform and consistent methodology for calculating nutrient input loads to land segments. The P5.3.2 model also uses automated calibration procedures to determine land and river parameters as well as the regional factors for EOS loads discussed in Section 2.2.1. This ensures that the land and river segments are simulated in a consistent manner and therefore the allocation of loads under Bay TMDLs is equitable. This aspect of the P5.3.2 model is important for the reference watershed approach, because the uniform and consistent approach to estimation of nutrient loads across watersheds gives greater validity to using load estimates from one watershed to set the TMDL endpoint for another. The P5.3.2 model is used to assign load and wasteload allocations for the Chesapeake Bay TMDLs. The load estimates from the P5.3.2 model will therefore shape water quality management in Maryland for the near future. The results of the model will affect point source and MS4 permits, as well as nonpoint source management programs for agriculture, silviculture, and stream restoration. Using the P5.3.2 model as the basis for the reference watershed approach enables Maryland to integrate its non-tidal nutrient TMDLs into the management framework for the Chesapeake Bay. It also provides a consistent and equitable way to determine the load contribution from neighboring states.

Reference Watershed Approach

In order to quantify the impact of nutrients on the aquatic health of non-tidal stream systems, a reference watershed TMDL approach was used, which resulted in the establishment of a *phosphorus loading threshold* for watersheds within the Highland and Piedmont physiographic regions. The phosphorus loading threshold was determined by a methodology similar to that used to develop sediment loading thresholds for Maryland's sediment TMDLs (Currey *et al.* 2006, MDE 2009b). Reference watersheds were determined based on Maryland's biocriteria methodology. The biocriteria methodology assesses biological impairment at the MD8-digit watershed scale based on the percentage of MBSS monitoring stations, translated into watershed stream miles, which are degraded. Individual monitoring station impairment is determined based on BIBI/FIBI scores lower than the Minimum Allowable IBI Limit (MAL), which is calculated based on the average annual allowable IBI value of 3.0 (on a scale of 1 to 5). Applying the MAL threshold helps avoid classification errors when assessing biological impairment (Roth *et al.* 1998, 2000; Stribling *et al.* 1998, MDE 2010a).

Comparison of watershed phosphorus loads to loads from reference watersheds requires that the watersheds be similar in physical and hydrological characteristics. To satisfy this requirement, Currey *et al.* (2006) selected reference watersheds only from the Highland and Piedmont physiographic regions (See Appendix A for the list of reference watersheds). This region is consistent with the non-coastal region that was identified in

the 1998 development of FIBI and subsequently used in the development of BIBI (Roth et al. 1998, Stribling et al. 1998).

To reduce the effect of the variability within the Highland and Piedmont physiographic regions, the watershed phosphorus loads were then normalized by a constant background condition: the all forested watershed condition. This new normalized term, defined as the *forest normalized phosphorus load* (Y_n), represents how many times greater the current watershed phosphorus load is than the *all forested phosphorus load*. The same methodology has been used to develop sediment TMDLs for non-tidal streams in Maryland (Currey *et al.* 2006, MDE 2009b). The *forest normalized phosphorus load* for this TMDL is calculated as the current watershed phosphorus load (calculated using the CBP P5.3.2 2009 Progress Scenario) divided by the *all forested phosphorus load*.

The equation for the *forest normalized phosphorus load* is as follows:

$$Y_n = \frac{y_{ws}}{y_{for}}$$
 (Equation 4.1)

where:

 Y_n = forest normalized phosphorus load

 y_{ws} = current watershed phosphorus load (lbs/yr)

 y_{for} = all forested phosphorus load (lbs/yr)

Based on Equation 4.1, the *forest normalized phosphorus load* for the Upper Monocacy River watershed is 7.62.

Twelve reference watersheds were selected from the Highland/Piedmont region. Reference watershed *forest normalized phosphorus loads* were calculated using CBP P5.3.2 2009 Progress Scenario landuse and phosphorus loads. Table A-1 in Appendix A shows the annual forest normalized phosphorus loads for reference watersheds, averaged over the simulation period 1991-2000 from the CBP P5.3.2 2002 Scenario. The median and 75th percentile of the reference watershed *forest phosphorus loads* were calculated and found to be 7.18 and 8.71 respectively. The median value of 7.18 was established as the *phosphorus loading threshold* as an environmentally conservative approach to develop this TMDL.

The Upper Monocacy River's forest normalized load exceeds the *forest normalized* reference phosphorus load (also referred to as the phosphorus loading threshold), indicating that the Upper Monocacy River watershed is receiving loads above the maximum allowable load the watershed can sustain without causing any phosphorus related impacts to aquatic health.

4.3 Scenario Descriptions and Results

The following analyses allow a comparison of baseline conditions (under which water quality problems exist) with future conditions, which project the water quality response to various simulated phosphorous load reductions. The analyses are grouped according to baseline conditions and future conditions associated with the TMDL.

Baseline Conditions

The baseline conditions are intended to provide a point of reference by which to compare the future scenario that simulates conditions of a TMDL. The baseline conditions typically reflect an approximation of nonpoint source loads during the monitoring period, as well as estimated point source loads based on discharge data for the same period.

The Upper Monocacy River watershed baseline nutrient loads are estimated using the landuse and EOS phosphorus loading rates from the CBP P5.3.2 2009 Progress Scenario The 2009 Progress Scenario represents current land-use, loading rates, and BMP implementation simulated using precipitation and other meteorological inputs from the period 1991-2000 to represent variable hydrological conditions, thereby addressing annual changes in hydrology and capturing wet, average and dry years. The period 1991-2000 is the baseline hydrological period for the Chesapeake Bay TMDL.

Watershed loading calculations, based on the CBP P5.3.2 segmentation scheme, are represented by multiple CBP P5.3.2 model segments within each MD 8-digit watershed. The nutrient loads from these segments are combined to represent the baseline condition. The Maryland point source nutrient loads are estimated based on discharge monitoring data and existing permit information. Details of these loading source estimates can be found in Section 2.2 and Section 4.6 of this report. The total baseline phosphorus load from the PA portion of the Upper Monocacy River watershed is 325,555 lbs per year (lbs/yr) while the load from Maryland portion is 390,952 lbs/yr, comprising a phosphorus load of 201,916 lbs/yr from the Double Pipe Creek watershed and a phosphorus load of 189,036 lbs/yr from the MD 8-digit Upper Monocacy River watershed proper.

Future (TMDL) Conditions

This scenario represents the future conditions associated with the maximum allowable phosphorus loads whereby there will be no phosphorus related impacts affecting aquatic health. In the TMDL calculation, the allowable load for the impaired watershed is calculated as the product of the *phosphorus loading threshold* (determined from watersheds with healthy biological communities) and the Upper Monocacy River *all forested phosphorus load* (see Section 4.2). The resulting load is considered the maximum allowable load the watershed can sustain without causing any nutrient related impacts to aquatic health.

The TMDL loading and associated reductions are averaged at the Maryland 8-digit watershed scale, which is consistent with the impairment listing scale. It is important to

recognize that some subwatersheds may require higher reductions than others, depending on the distribution of the land-use.

The formula for estimating the TMDL is as follows:

$$TMDL = Y_{ref} \cdot y_{forest}$$
 (Equation 4.2)

where:

TMDL = allowable load for impaired watershed (lbs/yr)

 Y_{ref} = phosphorus loading threshold

i.e., forest normalized reference phosphorus load (7.18)

 y_{forest} = all forested phosphorus load for watershed (lbs /yr)

The portion of the watershed in Pennsylvania upstream of Bridgeport at MON0528 (see Figure 3), which enters Maryland through mainstem Upper Monocacy River, will receive an informational TMDL based on current loading conditions. The future conditions (TMDL) loads from the remainder of the Pennsylvania portion of Upper Monocacy River watershed as well as the entire Maryland portion of the watershed will require reductions in phosphorus loads. The TMDL phosphorus load for the MD 8-digit Upper Monocacy River is 178,199 lbs per year of phosphorus, which represents a 6% reduction from baseline loads.

4.4 Critical Conditions and Seasonality

EPA's regulations require TMDLs to take into account critical conditions for stream flow, loading, and water quality parameters (CFR 2011b). The intent of this requirement is to ensure that the water quality of the waterbody is protected during times when it is most vulnerable. EPA's regulations also require that TMDLs take into account seasonal environmental variations.

The premise of the reference watershed approach is that the reference watershed is meeting water quality standards even under critical conditions. Therefore, the phosphorus loading rates derived from the reference watershed protects water quality standards under critical conditions. Moreover, the loading rates used in the TMDL were determined using the HSPF model, which is a continuous simulation model with a simulation period 1991-2000. The ten year simulation period encompasses seasonal variations and a range of hydrological and meteorological conditions.

The biological monitoring data used to determine the reference watersheds also integrates the stress effects over the course of time and thus inherently addresses critical conditions. Seasonality is captured in two respects. First, it is implicitly included through the use of the biological monitoring data. Second, the MBSS dataset included benthic sampling collected in the spring and fish sampling collected in the summer. Thus, this analysis has captured both spring and summer flow conditions.

4.5 TMDL Loading Caps

This section presents the average annual TMDL of phosphorus for the Upper Monocacy River watershed. These loads are considered the maximum allowable long-term average annual load the watershed can sustain without causing nutrient related impacts to aquatic health.

In Section 2.4, according to the DNR CORE/TREND and MBSS monitoring data, the Upper Monocacy River watershed mainstem was shown to be supporting its Aquatic Life and Wildlife Use. Based on this information, it was concluded that PA loads entering Maryland from the Upper Monocacy River mainstem (see Figure 3) do not have a negative impact on the aquatic health of the Upper Monocacy River watershed mainstem. Therefore, load reductions are not required for the section of Pennsylvania's portion of the watershed upstream of MON0528 (see Figure 3). This section of Pennsylvania's portion of the watershed is assigned an informational TMDL equivalent to its current baseline load. On the other hand, reductions are required for the remaining sections of the watershed in Pennsylvania which flow into Maryland's low order streams. Baseline loads will include loads from both sections of Pennsylvania's portion of the Upper Monocacy River watershed, and the upstream load allocation will include: (1) the informational allocation to Pennsylvania portion of the watershed that drains directly into the Monocacy River as well as (2) the section of Pennsylvania's portion of the watershed which drains into Maryland's lower other streams and therefore requires a load reduction.

The long-term average annual TMDL was calculated for the MD 8-digit watershed, based on Equation 4.2. In order to attain the TMDL loading cap calculated for the watershed, reductions to phosphorus baseline loads will be applied to the controllable sources. Significant phosphorus reductions will be required in the Upper Monocacy River watershed to meet the phosphorus allocations assigned to the Potomac Tidal Fresh Bay Water Quality Segment by the Chesapeake Bay TMDL, established by the EPA on December 29, 2010. To ensure consistency with the Bay TMDL, and therefore efficiency in the reduction of phosphorus loads, reductions will be applied to the same controllable sources identified in Maryland's Watershed Implementation Plans (WIPs) for the Bay TMDL. The controllable sources include: (1) regulated developed land; (2) high till crops, low till crops, hay, and pasture; (3) harvested forest; (4) unregulated animal feeding operations and CAFOS; and (5) industrial process sources and municipal wastewater treatment plants. Additional sources might need to be controlled in order to ensure that the water quality standards are attained in Chesapeake Bay as well as Upper Monocacy River.

An overall reduction of 15% for phosphorus from current estimated loads will be required to meet TMDL allocations and attain Maryland water quality standards. The baseline and TMDL scenarios for Upper Monocacy River watershed are presented in Table 8.

Table 8: Upper Monocacy River Watershed TMDL for Phosphorus

	Baseline Load	TMDL Scenario Load	Reduction
	(lbs/yr)	(lbs/yr)	(%)
PA	325,555	300,004	8%
Double Pipe Creek	201,916	128,328	36%
MD 8-digit	189,036	178,199	6%
Total	716,507	606,530	15%

4.6 Load Allocations Between Point and Nonpoint Sources

Per EPA regulation, all TMDLs need to be presented as a sum of waste load allocations (WLAs) for permitted point sources in the assessment unit and load allocations (LAs) for nonpoint sources generated within the assessment unit. In addition, TMDLs must account for natural background, tributary and adjacent segment loads, if applicable (CFR 2011b). Therefore, the Upper Monocacy River watershed TMDL allocations are presented in terms of WLAs (*i.e.*, point source loads identified within the watershed) and LAs (*i.e.*, the nonpoint source loads within the watershed and loads from upstream watersheds). The State reserves the right to allocate the TMDL among different sources in any manner that is reasonably calculated to protect aquatic life from nutrient related impacts.

Table 9 summarizes the TMDL scenario results for phosphorus. Equal reductions were applied to the phosphorus loads from controllable sources. Controllable loads were determined, in accordance with the Chesapeake Bay TMDL (US EPA 2010a), as the difference between the CBP 2010 "No Action" Scenario and the "E3" Scenario, where the No Action Scenario represents current land uses and point sources without nutrient controls, while the E3 Scenario represents application of all possible BMPs and control technologies to current land uses and point sources. This allocation methodology provides credit for existing BMPs in place, which is one the reasons the resulting reduction vary among source sectors.

In this watershed; crop, pasture, nurseries, developed land, and municipal WWTPs were identified as the largest controllable sources. Forest is the primary non-controllable source, as it represents the most natural condition in the watershed. Direct atmospheric deposition on water is a minor source that to a large extent originates outside the watershed. Atmospheric deposition will be reduced by existing state and federal programs and thus is not addressed in this TMDL. Urban stormwater nutrient loads are regulated under the NPDES MS4 program and therefore included in the WLA. There are no CSOs in the Upper Monocacy River watershed, and phosphorus loads from septic systems are considered insignificant.

The Upper Monocacy River Phosphorus TMDL requires a 3% reduction in phosphorus loads from nonpoint sources (See Table 9). For more detailed information regarding the Upper Monocacy River Watershed TMDL Contribution nonpoint source allocations,

please see the technical memorandum to this document entitled: Significant Phosphorus Nonpoint Sources in the Upper Monocacy River Watershed.

The waste load allocation (WLA) of the Upper Monocacy River watershed is allocated in three categories: Process Water WLA, Stormwater WLA, and CAFO WLA. The categories are described below.

Table 9: MD 8-digit Upper Monocacy River TMDL Phosphorus TMDL by Source Category

		Baseline Load	Baseline Load	TMDL	TMDL	Reduction		
	So	ource Categories	(lbs/yr)	Components	(lbs/yr)	(%)		
		Forest	11,435		11,435	0%		
		AFOs	7,225		7,225	0%		
ï	NT 4	Pasture	20,055		19,891	1%		
Kiver	Nonpoint Source	Crop	94,801	LA	91,173	4%		
		Nursery	19,460	LA	19,211	1%		
Upper Monocacy Contribution		Septic	0		0	0%		
no		Atmospheric Deposition	737		737	0%		
VIO	Total Non	point Sources	153,714		149,673	3%		
er]		CAFOs	379		379	0%		
рр	Point	Regulated Urban	24,513		23,741	3%		
1	Source	Process Water	10,430	WLA	4,406	58%		
		CSO	0	WLA	0	0%		
	Total Poin	nt Sources	35,322		28,526	19%		
Tot	al 8-digit V	Watershed	189,036		178,199	6%		
trea	Do	ouble Pipe Creek	201,916	II. otus o m	128,328	36%		
Upstrea		Pennsylvania	325,555	Upstream LA	300,004	8%		
Tot	al		716,507	•	606,530	15%		

Note: Individual baseline loads may not add to total load due to rounding.

Process Water WLA

There are ten municipal WWTP in the Upper Monocacy Watershed. Municipal WWTPs were assigned phosphorus WLAs as follows: (1) if the design flow of a facility is greater than 0.5 MGD and therefore is slated for upgrade to 'Enhanced Nutrient Reduction' (ENR), then the facility is given a WLA based on its design flow and the anticipated average annual ENR concentrations of 0.3 mg/l TP; (2) if the design flow of the facility is 0.5 MGD or less and has TP concentration limits, then that facility is assigned a WLA based on its Maryland Tributary Strategy Cap flow and the permit limit; (3) if the facility does not have permit limits, it is assigned a WLA based on its Maryland Tributary Strategy Cap flow and an assumed maximum average annual concentration of 3 mg/l TP. The Tributary Strategy Cap flow is the design flow of the facility or the projected 2020 flow (projected from 2003 actual discharge flows and Maryland Department of Natural Resources growth rates by county), whichever is less.

Seven industrial facilities discharging process water in the Upper Monocacy River watershed were judged to have the capacity to discharge TP in their process water. All of these industrial facilities are minor. Under the Chesapeake Bay TMDL, industrial facilities capable of discharging phosphorus in their process water were given a WLA based on the results of monitoring required by their permits or professional judgment. In addition, allocations for minor municipal WWTPs (with design flows less than 0.5 MGD) and for minor industrial facilities are presented in the Chesapeake Bay TMDL as a watershed-wide aggregate WLA. A similar approach was adopted for the Upper Monocacy River Phosphorus TMDL, and all minor municipal and minor industrial process water facilities allocations are represented as a watershed-wide WLA.

Based on the Maryland Tributary Strategy Cap flow and permit limits or the allocations under the Chesapeake Bay TMDL, applied to the Upper Monocacy River Phosphorus TMDL; it will result in a 58% reduction in phosphorus loads from process water sources (See Table 9). This reduction is a result of statewide policy decisions related to process water. For information regarding individual allocations to major process water facilities and information related to minor process water facilities included in the aggregate WLA, please see the technical memorandum to this document entitled "Significant Phosphorus Point Sources in the Upper Monocacy River Watershed".

Stormwater WLA

Per EPA requirements, "stormwater discharges that are regulated under Phase I or Phase II of the National Pollutant Discharge Elimination System (NPDES) stormwater program are point sources that must be included in the WLA portion of a TMDL" (US EPA 2002). The NPDES stormwater program covers the following types of discharges:

- MS4s these can be owned by local jurisdictions, municipalities, and state and federal entities (*i.e.*, departments of transportation, hospitals, military bases, etc.);
- general industrial stormwater permitted facilities; and
- construction sites that are one acre or larger.

EPA recognizes that available data and information are usually not detailed enough to determine WLAs for NPDES regulated stormwater discharges on an outfall-specific basis (US EPA 2002). Therefore, NPDES regulated stormwater loads within the Upper Monocacy River watershed TMDL will be expressed as a single NPDES stormwater WLA. Upon approval of the TMDL, "NPDES-regulated municipal stormwater and small construction storm water discharges effluent limits should be expressed as BMPs or other similar requirements, rather than as numeric effluent limits" (US EPA 2002).

The Upper Monocacy River NPDES stormwater WLA is based on reductions applied to the controllable phosphorus loads from the regulated developed landuse in the watershed, with credit provided to existing BMPs in place. The Upper Monocacy River NPDES stormwater WLA requires an overall reduction of 3% for phosphorus (See Table 9).

As stormwater assessment and/or other program monitoring efforts result in a more refined source assessment, MDE reserves the right to revise the current NPDES stormwater WLA provided the revisions are reasonably calculated to protect aquatic life from nutrient related impacts.

For more information regarding the distribution of NPDES stormwater WLAs among jurisdictions, please see the technical memorandum to this document entitled "Significant Phosphorus Point Sources in the Upper Monocacy River Watershed".

CAFO WLA

Under the Clean Water Act, concentrated animal feeding operations (CAFOs) require NPDES permits for their discharges or potential discharges (CFR 2011c). In January, 2009, Maryland implemented new regulations governing CAFOs (COMAR 26.08.01, 26.08.03, and 26.08.04), which were approved by the EPA in January, 2010. Under these regulations, CAFOs are required to fulfill the conditions of a general permit. These conditions include instituting a Comprehensive Nutrient Management Plan (CNMP) that meets the 'Nine Minimum Standards to Protect Water Quality'. The general permit also prohibits the discharge of pollutants, including nutrients, from CAFO production areas except as a result of an event greater than the 25-year, 24-hour storm. Based on the TMDL methodology approach of applying an equal percent reduction to all controllable loads, the Upper Monocacy River Phosphorus TMDL does not require a reduction in phosphorus loads from CAFOs.

4.7 Margin of Safety

All TMDLs must include a margin of safety to account for any lack of knowledge and uncertainty concerning the relationship between loads and water quality (CFR 2011a). It is proposed that the estimated variability around the reference watershed group used in this analysis already accounts for such uncertainty. Analysis of the reference watershed group *forest normalized phosphorus loads* indicates that approximately 75% of the reference watersheds have a value less than 8.71. Also, 50% of the reference watersheds have a value less than 7.18. Based on this analysis the *forest normalized reference phosphorus load* (also referred to as the *phosphorus loading threshold*) was set at the median value of 7.18. This is considered an environmentally conservative estimate, because 50% of the reference watersheds have a load above this value (7.18), which when compared to the 75% value (8.71), results in an implicit MOS of approximately 18%.

4.8 Summary of Total Maximum Daily Loads

The average annual phosphorus TMDL for the Maryland 8-digit Upper Monocacy River watershed and Pennsylvania streams draining to the watershed are summarized in Table 10. The Maryland Maximum Daily Phosphorus TMDL is summarized in Table 11 (See Appendix B for more details).

Table 10: Average Annual MD 8-digit Upper Monocacy River TMDL of **Phosphorus**

					L	A						WLA				
TMDL (lbs/yr)	=	$\mathbf{L}\mathbf{A_{PA}}^{1,2}$	+	LA _{DPC} ³	+	LA _{UMR}	+	Septic _{UM}	+	CAFO WLA _{UMR}	+	NPDES Stormwater WLA _{UMR}		Process Water WLA _{UMR}	+	MOS
606,530	=	300,004	+	128,328	+	149,673	+	0	+	379	+	23,741	+	4,406	+	Implicit

Upstream Load Allocation²

MD 8-digit Upper Monocacy River Watershed TMDL Contribution

Although for the purpose of this analysis the upstream load is referred to as an LA, it could include loads from point and nonpoint sources.

Table 11: MD 8-digit Upper Monocacy River Maximum Daily Load of Phosphorus

				LA										WLA				
3,883 = 1,854 + 918 + 925 + 0 + 2 + 147 + 37 + Implicit	l l	DL ay)	=	$\mathbf{L}\mathbf{A_{PA}}^{1,2}$	+	LA _{DPC} ³	+	LA _{UMR}	+	Septic _{UMR}	+		+	Stormwater	+	Water	+	MOS
	3,88	3	=	1,854	+	918	+	925	+	0	+	2	+	147	+	37	+	Implicit

Upstream Load Allocation²

MD 8-digit Upper Monocacy River Watershed TMDL Contribution

include loads from point and nonpoint sources.

³ LA_{DPC}: Double Pipe Creek TMDL, it could include loads from point and nonpoint sources

¹ LA_{PA} includes both (1) the PA load entering Maryland through the mainstem, which is receiving an allocation based on current loads, and (2) the load from those sections of PA which require phosphorus reductions because they drain to MD small order streams.

³ LA_{DPC}: Double Pipe Creek TMDL, it could include loads from point and nonpoint sources Note: Individual source categories loads may not add up to total load due to rounding.

¹ LA_{PA} includes both (1) the PA load entering Maryland through the mainstem, which is receiving an allocation based on current loads, and (2) the load from those sections of PA which require phosphorus reductions because they drain to MD small order streams.

Although for the purpose of this analysis the upstream load is referred to as an LA, it could

5.0 ASSURANCE OF IMPLEMENTATION

Section 303(d) of the Clean Water Act and current EPA regulations require reasonable assurance that the TMDL load and wasteload allocations can and will be implemented. This section provides the basis for reasonable assurance that the phosphorus TMDL in the Upper Monocacy River will be achieved and maintained.

The Upper Monocacy River phosphorus TMDL is expected to be implemented as part of a staged process recently developed by Maryland. This staged process is designed to achieve both the nutrient reductions needed within the Upper Monocacy River watershed and to meet target loads consistent with the Chesapeake Bay TMDL, established by EPA in 2010 (US EPA 2010a) and scheduled for full implementation by 2025. The Bay TMDL requires reductions of nitrogen, phosphorus and sediment loads throughout the Bay watershed to meet water quality standards that protect the designated uses in the Bay and its tidal tributaries. The nutrient reductions for the Bay TMDL are independent of those needed to implement any TMDLs developed to address nutrient-related impairments in Maryland's non-tidal waterbodies, although their reduction goals and strategies do overlap. For example, the implementation planning framework, developed by the Bay watershed jurisdictions in partnership with EPA, provides a staged approach to achieving Bay TMDL nutrient reduction goals that is also applicable to implementation of nutrient TMDLs in local non-tidal watersheds. In short, nutrient reductions required to meet the Chesapeake Bay TMDL will also support the restoration and protection of local water quality.

Maryland's Phase I Watershed Implementation Plan (WIP) for the Chesapeake Bay TMDL, finalized in December 2010, identifies nutrient reduction targets by source sector for the Potomac Tidal Fresh segment-shed, which includes Upper Monocacy River and a number of other Maryland 8-digit watersheds. EPA revised the nutrient and sediment load allocations for the Bay TMDL in August 2011, based on results of the updated Phase 5.3.2 Watershed Model. Maryland has been working with key local partners, including county and municipal staff, soil conservation managers, and a variety of stakeholder organizations and business interests, to help them develop local implementation plans at the county scale. These local plans are being incorporated into the basin-scale implementation plans in the Phase II WIP, which will be finalized in July 2012.

Maryland's Phase II WIP and the State's schedule of two-year milestones provide implementation strategies and a time line for achieving nutrient reductions across the State to meet Chesapeake Bay interim target loads by 2017, equivalent to 60% of the final target goals set for 2025 to fully implement the Chesapeake Bay TMDL in Maryland. A Phase III Plan will be developed in 2017 to address the additional reductions needed from 2018 through 2025 to meet the final targets. Prior to Phase III, the TMDL allocations may again be revised to reflect better data, a greater understanding of the natural systems, and to make use of enhanced analytical tools (such as updated watershed and water quality models). This iterative process provides an adaptive approach for achieving the Chesapeake Bay TMDL goals, as well as a framework and

time line for the staged implementation of the Upper Monocacy River non-tidal waters nutrient TMDL.

The proposed approach for achieving the Upper Monocacy River reduction targets will be based on deployment of an appropriate selection of the comprehensive implementation strategies described in Maryland's Phase I WIP (MDE 2010b) and Phase II WIP (MDE 2012b), the centerpieces of the State's "reasonable assurance" of implementation for the Bay TMDL. The strategies encompass a host of best management practices, pollution controls and other actions for all source sectors that cumulatively will result in meeting the State's 2017 interim nutrient and sediment reduction targets, as verified by the Chesapeake Bay Water Quality Model.

Accounting, tracking and reporting are an important part of the overall WIP strategy, and progress will be closely monitored for the two-year milestones by tracking both implementation and water quality. The setting of 2017 interim targets and a schedule of two-year milestone commitments will allow for an iterative, adaptive management process with ongoing assessments of implementation progress, as well as periodic reevaluation of nutrient impacts on local water quality. This staged approach provides further assurance that the implementation of the Upper Monocacy River phosphorus TMDL will be achieved through increased accountability and verification of water quality improvements over time.

Once the Bay TMDL nutrient target loads for the Upper Monocacy River watershed have been met, MDE will revisit the status of nutrient impacts on aquatic life in Upper Monocacy River, based on any additional monitoring data available and any improvements in the scientific understanding of the impacts of nutrients on aquatic life in free-flowing streams. The results of this reassessment will determine whether additional phosphorus reductions are needed in the watershed, or whether the Upper Monocacy River phosphorus TMDL goals have in fact been met.

<u>Maryland Legislative Actions and Funding Programs to Support TMDL</u> <u>Implementation</u>

Maryland recently enacted significant new legislation that requires Phase I MS4 jurisdictions to establish, by July 1, 2013, an annual stormwater remediation fee and a local watershed protection and restoration fund to support implementation of local stormwater management plans. Maryland has made a commitment to include provisions in Phase I and II MS4 permits, due for issuance in 2012, to implement the State's WIP strategies to reduce nutrient and sediment loads from urban stormwater sources.

Maryland has also enacted significant new legislation to increase the Bay Restoration Fund to provide financing for wastewater treatment plant upgrades and on-site septic system improvements, as well as legislation to guide growth of central sewer and septic systems. These new laws will support local efforts to reduce nutrient loads in both non-tidal watersheds and in downstream tidal waters of the Chesapeake Bay.

In response to the WIP and the increased burden on local governments to achieve nutrient reduction goals, Maryland has continued to increase funding in the Chesapeake and Atlantic Coastal Bays Trust Fund. For Fiscal Year 2013, in addition to \$25 million (pending) for the Trust Fund, \$38 million in general obligation bonds were made available to local communities for implementation of stormwater capital improvements. These funds will not only kick start restoration at the local level, but also create and retain green jobs in Maryland's economy. Funding was also increased to support implementation of natural filters on public lands (\$9 million), and funding for Soil Conservation Districts from 16 to 39 positions (\$2.2 million). In addition, funding for the cover crop program is at \$12 million – a record level.

MD's Water Quality Improvement Act of 1998 (WQIA) requires that comprehensive and enforceable nutrient management plans be developed, approved and implemented for all agricultural lands throughout MD. This act specifically required such plans for nitrogen be developed and implemented by 2002, and plans for phosphorus be completed by 2005.

Additional potential funding sources for implementation include Maryland's Agricultural Cost Share Program (MACS) which provides grants to farmers to help protect natural resources, and the Environmental Quality and Incentives Program, which focuses on implementing conservation practices and BMPs on land involved with livestock and production.

For the 2012-2013 milestone period, Maryland is working to: restrict fall fertilization of small grain crops on soil testing above a given nitrate level thresholds; require incorporation of organic nutrient sources (with some exceptions); limit fall applications of organic nutrient sources; and, require a cover crop following fall applications of organic nutrient sources. Future changes: nutrient application setbacks of 10-35 feet (depending upon application methods) will be required (2014); best management practices will be required for streams with adjacent livestock (2014); and winter application of all organic nutrient sources will be prohibited (2016-2020).

Maryland is also working to adopt a revised Phosphorus Site Index (PSI) and incorporate the new PSI into nutrient management plans in preparation for the 2013 crop season (winter 2012-2013).

To enhance Urban Nutrient Management as a nutrient reduction strategy, the State is working to develop regulations to implement the Fertilizer Use Act. This will: limit nitrogen and phosphorus content in fertilizer content and use on non-agricultural land; require certification and training for non-agricultural applicators; require certain fertilizer product labeling; and require outreach and education programs for homeowner fertilizer use.

For more information on Maryland's implementation and funding strategies to achieve nutrient and sediment reductions throughout the State's portion of the Chesapeake Bay watershed, please see Maryland's Phase II Watershed Implementation Plan.

REFERENCES

- Allan, J. D. 1995. *Stream Ecology: Structure and Function of Running Waters*. U.K. Chapman and Hall, 400 pp.
- Baish, A. S., and M. J. Caliri. 2009. *Overall Average Stormwater Effluent Removal Efficiencies for TN, TP, and TSS in Maryland from 1984-2002*. Baltimore, MD: Johns Hopkins University.
- Baldwin, A. H., S. E. Weammert, and T. W. Simpson. 2007. *Pollutant Load Reductions from 1985-2002*. College Park, MD: Mid Atlantic Water Program.
- Bicknell, B.R., J.C. Imhoff, J.L. Kittle, Jr., and A.S. Donigian, Jr. 2000. Hydrological Simulation Program Fortran (HSPF): User's Manual for Release 12.
- Beulac, M. N., and K. H. Reckhow. 1982. *An Examination of Land Use Nutrient Export Relationships*. Water Resources Bulletin. 15. pp. 1013-1022.
- Borchardt, M. A. 1996. *Nutrients*. In: *Algal Ecology: Freshwater Benthic Ecosystems*. Stevenson, R.J., M. L. Bothwell, and R. L. Lowe (eds.). San Diego, CA. Academic Press.
- Chiandani, G. and M. Vighi. 1974. *The N:P Ratio and Tests with Selanastrum to Predict Eutrophication in Lakes*. Water Research, Vol. 8, pp. 1063-1069.
- Claggett, P., F. M. Irani, and R. L. Thompson. 2012. Estimating the Extent of Impervious Surfaces and Turf Grass across Large Regions. Submitted to American Water Resources Association (AWRA) Spring Specialty Conference: GIS and Water Resources VII. New Orleans, LA. March 26-27, 2012.
- Claytor, R., and T. R. Schueler. 1997. *Technical Support Document for the State of Maryland Stormwater Design Manual Project*. Baltimore, MD: Maryland Department of the Environment.
- CFR (Code of Federal Regulations). 2011a. 40 CFR 130.7. http://edocket.access.gpo.gov/cfr 2011/julqtr/40cfr130.7.htm (Accessed March, 2012).
- _____. 2011b. 40 CFR 130.2(i).

 http://edocket.access.gpo.gov/cfr_2011/julqtr/40cfr130.2.htm (Accessed March, 2012).
- ______. 2011c. 40 CFR 122.23 http://edocket.access.gpo.gov/cfr_2011/julqtr/40cfr122.23.htm (Accessed March, 2012).

COMAR (Code of Maryland Regulations). 2012a. 26.08.02.02. http://www.dsd.state.md.us/comar/getfile.aspx?file=26.08.02.02.htm (Accessed March, 2012). . 2010b. 26.08.02.08 P(4)(a), P(4)(d), P(4)(e), P(4)(f), P(4)(g). http://www.dsd.state.md.us/comar/comarhtml/26/26.08.02.08.htm (Accessed March, 2012). . 2012c. 26.08.02.08 P(6)(b). http://www.dsd.state.md.us/comar/getfile.aspx?file=26.08.02.08.htm (Accessed March, 2012). . 2012d. 26.08.02.03-3 A (2), D(2). http://www.dsd.state.md.us/comar/getfile.aspx?file=26.08.02.03-3.htm (Accessed March, 2012). . COMAR 26.08.01, 26.08.03, and 26.08.04. http://www.dsd.state.md.us/comar/SubtitleSearch.aspx?search=26.08.02.* (Accessed March, 2012). Correll, D. L. 1998. The Role of Phosphorus in the Eutrophication of Receiving Waters: A Review. J. Environ. Qual. 27:261-266. Currey, D. L., A. A. Kasko, R. Mandel, and M. J. Brush. 2006. A Methodology for Addressing Sediment Impairments in Maryland's Non-tidal Watersheds. Baltimore, MD: Maryland Department of the Environment. Also Available at http://www.mde.state.md.us/assets/document/NT-Sediment TMDL Methodology Report%281%29.pdf. DNR (Maryland Department of Natural Resources). 1996. Maryland Water Quality Inventory, 1993-1995: A report on The Status of Natural Waters in Maryland Required by Section 305(b) of the Federal Water Pollution Control Act and Reported to the US Environmental Protection Agency and Citizens of the State of Maryland. Annapolis, MD: Department of Natural Resources. . 2007. Personal fax communication with Ellen Friedman. Annapolis. MD: Department of Natural Resources, Monitoring and Non-Tidal Assessment Program. . 2009. Benthic Macroinvertebrate Communities At Maryland's Core/Trend Monitoring Stations: Water Quality Status And Trends. Annapolis, MD: Department of Natural Resources. MDE (Maryland Department of the Environment). 2000. An Overview of Wetlands and Water Resources of Maryland. Baltimore, MD: Maryland Department of the Environment.

2004. 2004 List of Impaired Surface Waters [303(d) List] and Integrated
Assessment of Water Quality in Maryland Submitted in Accordance with Sections
303(d) and 305(b) of the Clean Water Act. Baltimore, MD: Maryland Department of
the Environment.
http://www.mde.state.md.us/Programs/WaterPrograms/TMDL/Maryland%20303%20
dlist/final_2004_303dlist.asp.
2008. 2008 Integrated Report of Surface Water Quality in Maryland.
http://www.mde.state.md.us/Programs/WaterPrograms/TMDL/maryland%20303%20 dlist/2008 final 303d list.aspx . (Accessed March, 2010).
———. 2009a. <i>Maryland Biological Stressor Identification Process</i> . Baltimore, MD: Maryland Department of the Environment.
1.22 (1.1m.) 1.m. 2 • p. m. 1.m. • 1. m. • 1.m. •
2009b. Addendum: Updates to A Methodology for Addressing Sediment
Impairments in Maryland's Non-tidal Watersheds. Baltimore, MD: Maryland
Department of the Environment.
2010a. Final 2010 Integrated Report of Surface Water Quality in
Maryland.
http://www.mde.state.md.us/programs/Water/TMDL/Integrated 303dReports/Pages/Final Programs/Water/TMDL/Integrated 303dReports/Pages/Final Programs/Water/Final Programs/Water/Final Programs/Water/Final Programs/Water/Final Programs/Water/Final Programs/Water/Final Programs/Water/Final Programs/Water/Final Programs/Water/Final Programs/Wa
nal_approved_2010_ir.aspx (Accessed March, 2012).
. 2010b. Maryland's Phase I Watershed Implementation Plan for the
Chesapeake Bay Total Maximum Daily Load. Baltimore, MD: Maryland Department of the Environment. Also Available at
http://www.mde.maryland.gov/programs/Water/TMDL/TMDLHome/Pages/Final_Ba
y WIP 2010.aspx.
2011. Watershed Report for Biological Impairment of the Upper
Monocacy River Watershed in Carroll and Frederick Counties, Maryland -
Biological Stressor Identification Analysis Results and Interpretation. Baltimore,
MD: Maryland Department of the Environment.
. 2012. Draft. Maryland's Phase II Watershed Implementation Plan for
the Chesapeake Bay Total Maximum Daily Load. Baltimore, MD: Maryland
Department of the Environment. Also Available at
http://www.mde.state.md.us/programs/Water/TMDL/TMDLImplementation/Pages/D
RAFT PhaseII WIPDocument Main.aspx.

MGS (Maryland Geological Survey). 2009. *A Brief Description of the Geology of Maryland*. http://www.mgs.md.gov/esic/brochures/mdgeology.html (Accessed March, 2012).

- Pitt, R., A. Maestre, R., Morquecho, T. Brown, C. Swann, K. Cappiella, and T. Schuler. 2005. *Evaluation of NPDES Phase 1 Municipal Stormwater Monitoring Data*. http://www.epa.gov/owow/nps/natlstormwater03/28Pitt.pdf
- Roth, N., M. T. Southerland, J. C. Chaillou, R. Klauda, P. F. Kazyak, S. A. Stranko, S. Weisberg, L. Hall Jr., and R. Morgan II. 1998. *Maryland Biological Stream Survey: Development of a Fish Index of Biotic Integrity*. Environmental Management and Assessment 51: 89-106.
- Roth, N. E., M. T. Southerland, J. C. Chaillou, P. F. Kazyak, and S.A. Stranko. 2000. *Refinement and Validation of a Fish Index of Biotic Integrity for Maryland Streams*. Columbia, MD: Versar, Inc. with Maryland Department of Natural Resources, Monitoring and Non-Tidal Assessment Division.
- Roth, N. E., M. T. Southerland, G. M. Rogers, and J. H. Volstad. 2005. *Maryland Biological Stream Survey 2000-2004: Volume IV: Ecological Assessment of Watersheds Sampled in 2003*. Columbia, MD: Versar, Inc. with Maryland Department of Natural Resources, Monitoring and Non-Tidal Assessment Division.
- Stribling, J. B., B. K. Jessup, J. S. White, D. Boward, and M. Hurd. 1998. *Development of a Benthic Index of Biotic Integrity for Maryland Streams*. Owings Mills, MD: Tetra Tech, Inc. with Maryland Department of Natural Resources, Monitoring and Non-Tidal Assessment Program.
- USDA (United States Department of Agriculture). 1960. Soil Survey of Frederick
 County. Washington, DC: United States Department of Agriculture.

 _______. 1969. Soil Survey of Carroll County. Washington, DC: United States
 Department of Agriculture.

 ______. 1982. 1982 Census of Agriculture. Washington, DC: United States
 Department of Agriculture.

 ______. 1987. 1987 Census of Agriculture. Washington, DC: United States
 Department of Agriculture.

 ______. 1992. 1992 Census of Agriculture. Washington, DC: United States
 Department of Agriculture.

 _____. 1997. 1997 Census of Agriculture. Washington, DC: United States
 Department of Agriculture.

 _____. 1902. 2002 Census of Agriculture. Washington, DC: United States
 Department of Agriculture.

Department of Agriculture.

US EPA (U.S. Environmental Protection Agency). 1991. <i>Technical Support Doc (TSD) for Water Quality-based Toxics Control</i> . Washington, DC: U.S.	cument
Environmental Protection Agency. Also Available at	
http://www.epa.gov/npdes/pubs/owm0264.pdf.	
2002. Establishing Total Maximum Daily Load (TMDL) Wastel	
Allocations (WLAs) for Storm Water Sources and NPDES Permit Requirement	
Based on Those WLAs. Washington, DC: U.S. Environmental Protection Ag	ency.
2007. Options for the Expression of Daily Loads in TMDLs (DR	
6/22/07). Washington, D.C: U.S. Environmental Protection Agency, Office	of
Wetlands, Oceans & Watersheds. Also Available at	
www.epa.gov/owow/tmdl/draft_daily_loads_tech.pdf.	
2010a. Chesapeake Bay Total Maximum Daily Load. U.S.	
Environmental Protection Agency, Chesapeake Bay Program Office, Annapo	lis MD.
December 2010.	
2010b Cl	LEDA
. 2010b. Chesapeake Bay Phase 5.3 Community Watershed Model	
903S10002 - CBP/TRS-303-10. U.S. Environmental Protection Agency, Ches	sapeake
Bay Program Office, Annapolis MD. December 2010. Also available at	- 111
http://ches.communitymodeling.org/models/CBPhase5/documentation.php#p.	<u>5modeld</u>
oc.	

APPENDIX A – Watershed Characterization Data

Table A-1: Reference Watersheds

MD 8-digit Name	MD 8-digit	Percent Stream Mile Degraded (%) ^{1,2}	Forest Normalized Phosphorus Load ^{3,4}							
Deer Creek	02120202	11	6.93							
Octoraro Creek ⁵	02120203	8	10.14							
Broad Creek	02120205	12	5.71							
Northeast River ⁵	02130608	14	7.13							
Furnace Bay ⁵	02130608	11	7.24							
Little Gunpowder Falls ⁵	02130804	15	8.22							
Prettyboy Reservoir	02130806	16	11.92							
Middle Patuxent River ⁵	02131106	20	8.29							
Brighton Dam	02131108	11	9.94							
Sideling Hill Creek	02140510	20	2.38							
Fifteen Mile Creek ⁵	02140511	4	1.51							
Savage River	02141006	7	2.46							
Me	7.18									
75 th Pe	75 th Percentile									

Notes:

- ¹ Percent stream miles degraded within an 8-digit watershed is based on the percentage of impaired MBSS stations within the watershed (MDE 2008).
- ² The percent stream miles degraded threshold to determine if an 8-digit watershed is impaired for impacts to biological communities is based on a comparison to reference conditions (MDE 2008).
- ³ Forest normalized phosphorus loads based on Maryland watershed area only (consistent with MBSS random monitoring data).
- ⁴ Based on 1991-2000 average annual edge-of-stream loads from CBP Phase 5.3.2 Watershed Model 2009 Progress Scenario and regional average forest yields.
- ⁵ Forest normalized phosphorus load does not include process water point sources discharging to mainstem river.

Upper Monocacy River Nutrient TMDL A-1 Document Version: August 30, 2012

APPENDIX B – Technical Approach Used to Generate Maximum Daily Loads

Summary

This appendix documents the technical approach used to define maximum daily loads of phosphorus consistent with the average annual TMDL, which is protective of water quality standards in the Upper Monocacy River watershed. The approach builds upon the modeling analysis that was conducted to determine the loadings of phosphorus and can be summarized as follows.

- The approach defines maximum daily loads for each of the source categories.
- The approach builds upon the TMDL modeling analysis that was conducted to ensure that average annual loading targets result in compliance with water quality standards
- The approach converts daily time-series loadings into TMDL values in a manner that is consistent with available EPA guidance on generating daily loads for TMDLs.
- The approach considers a daily load level of a resolution based on the specific data that exists for each source category.

Introduction

This appendix documents the development and application of the approach used to define total maximum daily loads on a daily basis. It is divided into sections discussing:

- Basis for Approach,
- Options Considered,
- Selected Approach,
- Results of Approach.

Basis for Approach

The overall approach for the development of daily loads was based upon the following factors:

- **Average Annual TMDL:** The basis of the average annual phosphorus TMDL is that cumulative high nutrient loading rates have negative impacts on the biological community. Thus, the average annual phosphorus loads were calculated to be protective of the aquatic life designated use.
- **CBP P5.3.2 Watershed Model Phosphorus Loads:** As described in Section 2.2.1, the EOS phosphorus loads in the P5.3.2 model are based on (1) median of phosphorus export rates reported in the scientific literature; (2) land segment calibration targets adjusted by nutrient applications in excess of vegetative uptake; and (3) regional factors calculated in the calibration of river segments, where simulated output is compared to observed monitoring data. Riverine processes are calibrated in river segments representing rivers of approximately 100 cfs average annual flow.

• Draft EPA guidance document entitled "Developing Daily Loads for Load-based TMDLs": This guidance document provides options for defining maximum daily loads when using TMDL approaches that generate daily output. (EPA, 2007).

The rationale for developing TMDLs expressed as *daily* loads was to accept the existing average annual TMDLs, but then develop a method for converting these numbers to a maximum *daily* load – in a manner consistent with EPA guidance and available information.

Options Considered

The draft EPA guidance document for developing daily loads does not specify a single approach that must be adhered to, but rather it contains a range of acceptable options. The selection of a specific method for translating a time-series of allowable loads into the expression of a TMDL requires decisions regarding both the level of resolution (e.g., single daily load for all conditions vs. loads that vary with environmental conditions) and level of probability associated with the TMDL.

This section describes the range of options that were considered when developing maximum daily loads for the Upper Monocacy River watershed.

Level of Resolution

The level of resolution pertains to the amount of detail used in specifying the maximum daily load. The draft EPA guidance on daily loads provides three categories of options for level of resolution, all of which are potentially applicable for the Upper Monocacy River watershed:

- 1. **Representative daily load:** In this option, a single daily load (or multiple representative daily loads) is specified that covers all time periods and environmental conditions.
- 2. **Flow-variable daily load:** This option allows the maximum daily load to vary based upon the observed flow condition.
- 3. **Temporally-variable daily load:** This option allows the maximum daily load to vary based upon seasons or times of varying source or water body behavior.

Probability Level

All TMDLs have some probability of being exceeded, with the specific probability being explicitly specified or implicitly assumed. This level of probability directly or indirectly reflects two separate phenomena:

- 1. Water quality criteria consist of components describing acceptable magnitude, duration, and frequency. The frequency component addresses how often conditions can allowably surpass the combined magnitude and duration components.
- 2. Pollutant loads, especially from wet weather sources, typically exhibit a large degree of variability over time. It is rarely practical to specify a "never to be exceeded value" for a daily load, as essentially any loading value has some finite probability of being exceeded.

The draft daily load guidance document states that the probability component of the maximum daily load should be "based on a representative statistical measure" that is dependent upon the specific TMDL and best professional judgment of the developers. This statistical measure

represents how often the maximum daily load is expected/allowed to be exceeded. The primary options for selecting this level of protection would be:

- 1. **The maximum daily load reflects some central tendency:** In this option, the maximum daily load is based upon the mean or median value of the range of loads expected to occur. The variability in the actual loads is not addressed.
- 2. The maximum daily load reflects a level of protection implicitly provided by the selection of some "critical" period: In this option, the maximum daily load is based upon the allowable load that is predicted to occur during some critical period examined during the analysis. The developer does not explicitly specify the probability of occurrence.
- 3. **The maximum daily load is a value that will be exceeded with a pre-defined probability:** In this option, a "reasonable" upper bound percentile is selected for the maximum daily load based upon a characterization of the variability of daily loads. For example, selection of the 95th percentile value would result in maximum daily load that would be exceeded 5% of the time.

Selected Approach

The approach selected for defining a daily maximum load for the Upper Monocacy River watershed was based upon the specific data that exists for each source category. The approach consists of unique methods for each of the following categories of sources:

- Approach for Nonpoint Sources and Stormwater Point Sources,
- Approach for Process Water Point Sources,
- Approach for Upstream Loads.

Approach for Nonpoint Sources, CAFOs, and Stormwater Point Sources

The level of resolution selected for defining a daily maximum load for the Upper Monocacy River watershed was a representative daily load, expressed as a single daily load for each loading source. This approach was chosen based upon the specific data that exists for nonpoint sources, CAFOs, and stormwater point sources.

Currently, the best available data is the CBP P5.3.2 model daily time series calibrated to long-term average annual loads (per land-use). The CBP reach simulation results are calibrated to daily monitoring information for river reach segments with a flow typically greater that 100 cfs. See US EPA (2010b) for details on the river reach calibration. The calibration of river parameters modifies the EOS input loads to reaches by introducing gains or losses of phosphorus through riverine processes. These gains or losses are associated with the represented reach and therefore the absolute magnitude of the river phosphorus loads are not the appropriate measure of EOS loads at the subwatershed scale where excess nutrients are associated with biological impairments.

It was concluded that it would not be appropriate to apply the absolute values of the reach simulation model results to the TMDL, but to adopt the methodology of the MD sediment TMDLs which is a statistically-based estimate using the annual loads and the distribution of

simulated daily loads. In this approach, it is assumed that, because they are based on the same underlying hydrology, the distribution of the daily simulated river reach loads represents the distribution of delivered EOS loads, in order to calculate a normalized statistical parameter to estimate the maximum daily loads.

The maximum daily load was estimated based on three factors: a specified probability level, the average annual phosphorus TMDL, and the coefficient of variation (CV) of the CBP P5.3.2 Upper Monocacy River reach simulation daily loads. The probability level (or exceedance frequency) is based upon guidance from EPA (US EPA 1991) where examples suggest that when converting from a long-term average to a daily value, the z-score corresponding to the 99th percentile of the log-normal probability distribution should be used.

The CBP P5.3.2 Upper Monocacy River reach simulation consisted of a daily time series beginning in 1985 and extending to the year 2005. The CV was estimated by first converting the daily phosphorus load values to a log distribution and then verifying that the results approximated a normal distribution (see Figure C-1). Next, the CV for this distribution was calculated using the arithmetic mean and standard deviation results from the log transformation. The log-transformed values were used to reduce the possible influence of outliers. The resulting CV of 0.395 was calculated using the following equation:

$$CV = \frac{\beta}{\alpha}$$
 (Equation B 1)

where

CV = coefficient of variation

$$\beta = \alpha \sqrt{e^{\sigma^2} - 1}$$

$$\alpha = e^{(\mu + 0.5*\sigma^2)}$$

 $\alpha = \text{mean (arithmetic)}$

 β = standard deviation (arithmetic)

 μ = mean of logarithms

σ=standard deviation of logarithms

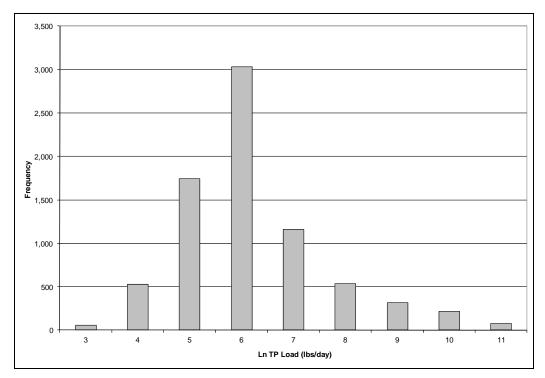


Figure B-1: Histogram of CBP River Segment Daily Phosphorus Simulation Results for the Upper Monocacy River Watershed

The maximum "daily" load for each contributing source is estimated as the long-term average annual load multiplied by a factor that accounts for expected variability of daily loading values. The equation is as follows:

$$MDL = LTA * e^{(z\sigma - 0.5\sigma^2)}$$
 (Equation B 2)

where

MDL = Maximum daily load

LTA = Long-term average (average annual load)

Z = z-score associated with target probability level

 $\sigma^2 = \ln(CV^2 + 1)$

CV = Coefficient of variation based on arithmetic mean and standard deviation

Using a z-score associated with the 99th percent probability, CV of 0.395, and consistent units, the resulting dimensionless conversion factor from long-term average loads to a maximum daily value is 2.256. The average annual Upper Monocacy River phosphorus TMDL is reported in lbs/year, and the conversion from lbs/year to a maximum daily load in lbs/day is 0.006 (e.g. 2.256/365).

Approach for Process Water Point Sources

The TMDL also considers contributions from other point sources (*i.e.*, sources other than stormwater point sources) in the watershed that have NPDES permits with phosphorus limits. As these sources are generally minor contributors to overall nutrient loads, the TMDL analysis that defined the average annual TMDL did not propose any reductions for these sources and held each of them constant at their existing technology-based NPDES permit monthly (or daily if monthly was not specified) limit for the entire year.

The approach used to determine maximum daily loads for these sources was dependent upon whether a maximum daily load was specified within the permit. If a maximum daily limit was specified, then the reported average flow was multiplied by the daily maximum limit to obtain a maximum daily load. If a maximum daily limit was not specified, the maximum daily loads were calculated based on the guidance provided in the Technical Support Document (TSD) for Water Quality-based Toxics Control (US EPA 1991). The long-term average annual TMDL was converted to maximum daily limits using Table 5-2 of the TSD assuming a coefficient of variation of 0.6 and a 99th percentile probability. This results in a dimensionless multiplication factor of 3.11. The average annual Upper Monocacy River Phosphorus TMDL are reported in lbs/year, and the conversion from lbs/year to a maximum daily load in lbs/day is 0.0085 (e.g. 3.11/365).

In the case of Upper Monocacy River, all permitted sources with phosphorus concentration limits have no permitted daily maximum concentrations, so the maximum daily load was calculated based on the TSD guidance.

Margin of Safety

As explained in Section 4.7, an implicit margin of safety (MOS) is used in the Upper Monocacy River Phosphorus TMDL.

Results of Approach

This section lists the results of the selected approach to define maximum daily loads for the Upper Monocacy River watershed.

- Calculation Approach for Nonpoint Sources, CAFOs, and Stormwater Point Sources
 LA (lbs/day) = Average Annual TMDL LA (lbs/yr) * 0.006
 Stormwater WLA (lbs/day) = Average Annual TMDL Stormwater WLA (lbs/yr) * 0.006
- Calculation Approach for Process Water Point Sources
 - o For permits with a daily maximum limit:

Process Water WLA (lbs/day) = Permit flow (mgd) * Daily maximum permit limit (mg/l) * 0.0042

o For permits without a daily maximum limit:

Process Water WLA (lbs/day) = Process Water WLA (lbs/yr)* 0.0085

Calculation Approach for Upstream Sources

Allocation²

o For Pennsylvania Upstream Sources

LA (lbs/day) = Average Annual TMDL LA (lbs/yr) * 0.006

Table B-1: Summary of Maximum Daily Loads of Total Phosphorus for the Upper Monocacy River Watershed (lbs/day)

		LA								WLA						
TMDL (lbs/day)		$\mathbf{L}\mathbf{A}_{\mathbf{P}\mathbf{A}}^{1,2}$	+	LA _{DPC} ³	+	LA _{UMR}	+	Septic _{UMR}	+	CAFO WLA _{UMR}	+	NPDES Stormwater	+		+	MOS
										Civil		WLA_{UMR}		WLA_{UMR}		
3,883	=	1,854	+	918	+	925	+	0	+	2	+	147	+	37	+	Implicit
		Upstr	ean	n Load		М	٠,٠	digit Upper M	ono	onay Diyar Wa	tar	rshad TMDL Car	trik	uution		

MD 8-digit Upper Monocacy River Watershed TMDL Contribution

¹ LA_{PA} includes both (1) the PA load entering Maryland through the mainstem, which is receiving an allocation based on current loads, and (2) the load from those sections of PA which require phosphorus reductions because they drain to MD small order streams.

² Although for the purpose of this analysis the upstream load is referred to as an LA, it could include loads from point and nonpoint sources.

³ LA_{DPC}: Double Pipe Creek TMDL, it could include loads from point and nonpoint sources

APPENDIX C – Hydrologic Relationship between the Double Pipe Creek, MD 8-Digit Upper Monocacy River, and Lower Monocacy River Watersheds

The purpose of this appendix is to explain the hydrologic relationship between the Double Pipe Creek, Upper Monocacy River, and Lower Monocacy River watersheds. As illustrated in Figure C-1, the three watersheds are hydrologically connected, beginning with the Double Pipe Creek watershed to the east. The Double Pipe Creek watershed flows into the Upper Monocacy River watershed, near the town of Rocky Ridge. It is also shown in Figure C-1 that the Upper Monocacy River watershed includes land in Pennsylvania and Maryland. The combined flow from the Upper Monocacy River and the Double Pipe Creek flows into the Lower Monocacy River. The hydrologic connectivity of the watersheds is illustrated in Figure C-2.

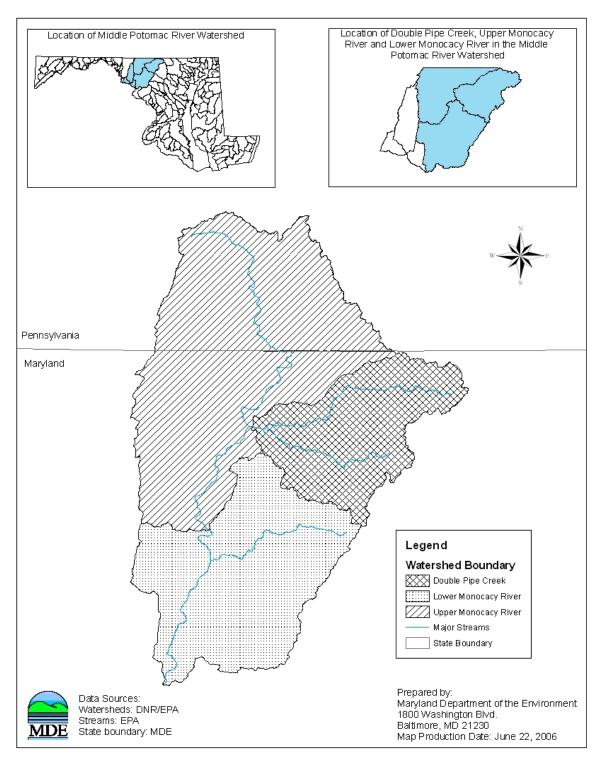


Figure C-1: Location of the Double Pipe Creek, Upper Monocacy River, and Lower Monocacy River Watersheds

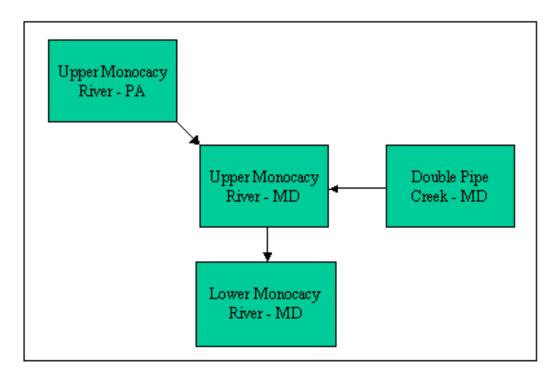


Figure C-2: Flow Schematic of the Upper Monocacy River, Upper Monocacy River, and Lower Monocacy River Watersheds