

# RESPONSE AND DEVELOPMENT WORK PLAN

AREA B: SUB-PARCEL B7-2  
TRADEPOINT ATLANTIC  
SPARROWS POINT, MARYLAND

Prepared For:




**TRADEPOINT ATLANTIC**  
6995 Bethlehem Boulevard  
Sparrows Point, Maryland 21219

Prepared By:



**ARM GROUP LLC**  
9175 Guilford Road  
Suite 310  
Columbia, Maryland 21046  
  
ARM Project No. 21010207

Respectfully Submitted:

A handwritten signature in black ink that reads "Joshua M. Barna".

Joshua M. Barna, G.I.T.  
Project Geologist

A handwritten signature in black ink that reads "Kaye Guille".

Kaye Guille, P.E., PMP  
Senior Engineer

Revision 2 – June 14, 2023

## TABLE OF CONTENTS

1.0	Introduction.....	1
2.0	Site Description and History.....	4
2.1	Site Description.....	4
2.2	Site History.....	4
2.3	Site Grading Activities.....	4
3.0	Environmental Site Assessment Results.....	6
3.1	Phase I Environmental Site Assessment Results.....	6
3.2	Phase II Investigation Results – Sub-Parcel B7-2.....	6
3.2.1	Phase II Soil Investigation Findings.....	7
3.2.2	Phase II Groundwater Investigation Findings.....	7
3.2.3	Locations of Potential Concern.....	8
3.3	Human Health Screening Level Risk Assessment.....	9
3.3.1	Analysis Process.....	9
3.3.2	SLRA Results and Risk Characterization.....	12
3.3.3	Evaluation of RCRA Criteria.....	14
4.0	Proposed Site Development Plan.....	17
4.1	Response Phase – Groundwater Network Modification.....	18
4.2	Development Phase.....	18
4.2.1	Erosion and Sediment Control Installation.....	18
4.2.2	Grading and Site Preparation.....	18
4.2.3	Installation of Structures and Underground Utilities.....	19
4.2.4	Paving.....	19
4.2.5	Stormwater Management.....	19
5.0	Development Implementation Protocols.....	21
5.1	Development Phase.....	21
5.1.1	Erosion/Sediment Control.....	22
5.1.2	Soil Excavation and Utility Trenching.....	22
5.1.3	Soil Sampling and Disposal.....	23
5.1.4	Fill.....	24
5.1.5	Dust Control.....	24
5.2	Water Management.....	25
5.2.1	Groundwater PAL Exceedances.....	25
5.2.2	Dewatering.....	26
5.3	Health and Safety.....	27
5.4	Institutional Controls (Future Land Use Controls).....	27
5.5	Post Remediation Requirements.....	28
5.6	Construction Oversight.....	29
6.0	Permits, Notifications and Contingencies.....	30
7.0	Implementation Schedule.....	31

## TABLE OF CONTENTS (CONT.)

### FIGURES

Figure 1	Area A & Area B Parcels.....	Following Text
Figure 2	Development Grading Plan.....	Following Text
Figure 3	Soil Boring Locations .....	Following Text
Figure S1	Soil Inorganic PAL Exceedances.....	Following Text
Figure 4	Groundwater Sample Locations.....	Following Text
Figure GW1	2023 Groundwater PAL Exceedances .....	Following Text
Figure 5	Proposed Capping Plan.....	Following Text
Figure 6	Shallow Groundwater Elevation.....	Following Text

### TABLES

Table 1	Summary of Organics Detected in Soil .....	Following Text
Table 2	Summary of Inorganics Detected in Soil.....	Following Text
Table 3	Summary of Organics Detected in Groundwater.....	Following Text
Table 4	Summary of Inorganics Detected in Groundwater .....	Following Text
Table 5	Cumulative Vapor Intrusion Risks.....	Following Text
Table 6	COPC Screening Analysis .....	Following Text
Table 7	Assessment of Lead .....	Following Text
Table 8	Soil Exposure Point Concentrations .....	Following Text
Table 9	Risk Ratios – Composite Worker Surface Soil.....	Following Text
Table 10	Risk Ratios – Composite Worker Subsurface Soil .....	Following Text
Table 11	Risk Ratios – Composite Worker Pooled Soil.....	Following Text
Table 12	Risk Ratios – Construction Worker Surface Soil .....	Following Text
Table 13	Risk Ratios – Construction Worker Subsurface Soil.....	Following Text
Table 14	Risk Ratios – Construction Worker Pooled Soil.....	Following Text

**TABLE OF CONTENTS  
 (CONT.)**

**APPENDICES**

Appendix A CHS Request Letter from Tradepoint Atlantic .....Following Text  
 Appendix B Site Grading Documentation.....Following Text  
 Appendix C Construction Worker SSL Calculation Sheet .....Following Text  
 Appendix D Personal Protective Equipment Standard Operational Procedure.....Following Text  
 Appendix E Development Plan Drawings .....Following Text  
 Appendix F Minimum Capping Section Details.....Following Text  
 Appendix G Utility Trench Section Detail .....Following Text  
 Appendix H Utility Excavation NAPL Contingency Plan .....Following Text

**ELECTRONIC ATTACHMENTS**

Soil Laboratory Certificates of Analysis..... Electronic Attachment  
 Soil Data Validation Reports ..... Electronic Attachment  
 Groundwater Laboratory Certificates of Analysis ..... Electronic Attachment  
 Groundwater Data Validation Reports..... Electronic Attachment  
 ProUCL Input Tables (formatted soil analytical data)..... Electronic Attachment  
 ProUCL Output Tables ..... Electronic Attachment  
 Lead Evaluation Spreadsheet..... Electronic Attachment  
 Health and Safety Plan..... Electronic Attachment



## 1.0 INTRODUCTION

ARM Group LLC (ARM), on behalf of Tradepoint Atlantic, has prepared this Response and Development Work Plan (RADWP) for a portion of the Tradepoint Atlantic property that has been designated as Area B: Sub-Parcel B7-2 (the Site). Tradepoint Atlantic submitted a letter (dated March 28, 2023; **Appendix A**) requesting an expedited plan review to achieve construction deadlines for the proposed development on this Site. As shown on **Figure 1**, Sub-Parcel B7-2 consists of approximately 11.6 acres located within Parcel B7 of the approximately 3,100-acre former steel plant property. Preliminary grading has already been conducted at the Site as proposed in the Sub-Parcel B7-2 Grading Plan (dated August 2, 2022).

As shown on **Figure 2**, Sub-Parcel B7-2 is slated for development and occupancy as a warehouse. Associated water lines, stormwater lines, electric lines, and sanitary sewer lines are also proposed. The planned development activities will generally include grading, paving of parking areas and roadways, installation of utilities, and construction of a 204,000 square foot warehouse. Subsequent site use will involve workers in the on-site buildings, and truck drivers entering and leaving the Site with goods. Outside of the main development area designated as Sub-Parcel B7-2, temporary construction zones (not intended for permanent occupancy) with a total area of 1.97 acres within the Limit of Disturbance (LOD) will be utilized for utility installation. These external construction worker areas are shown on **Figure 2**.

The conduct of any environmental assessment and cleanup activities on the Tradepoint Atlantic property, as well as any associated development, is subject to the requirements outlined in the following agreements:

- Administrative Consent Order (ACO) between Tradepoint Atlantic (formerly Sparrows Point Terminal, LLC) and the Maryland Department of the Environment (MDE), effective September 12, 2014; and
- Settlement Agreement and Covenant Not to Sue (SA) between Tradepoint Atlantic (formerly Sparrows Point Terminal, LLC) and the United States Environmental Protection Agency (USEPA), effective November 25, 2014.

An application to enter the full Tradepoint Atlantic property (3,100 acres) into the MDE Voluntary Cleanup Program (MDE-VCP) was submitted to the MDE on June 27, 2014. The property's current and anticipated future use is Tier 3 (Industrial) and plans for the property include demolition and redevelopment over the next several years.

Sub-Parcel B7-2 is part of the acreage that was removed (Carveout Area) from inclusion in the Multimedia Consent Decree between Bethlehem Steel Corporation, the USEPA, and the MDE (effective October 8, 1997) as documented in correspondence received from USEPA on September 12, 2014. Based on this agreement, USEPA determined that no further investigation or corrective

measures will be required under the terms of the Consent Decree for the Carveout Area. However, the SA reflects that the property within the Carveout Area will remain subject to the USEPA's Resource Conservation and Recovery Act (RCRA) Corrective Action authorities.

In consultation with the MDE, Tradepoint Atlantic affirms that it desires to accelerate the assessment, remediation, and redevelopment of certain sub-parcels within the larger site due to current market conditions. To that end, the MDE and Tradepoint Atlantic agree that the Controlled Hazardous Substance (CHS) Act (Section 7-222 of the Environment Article) and the CHS Response Plan (Code of Maryland Regulations (COMAR) 26.14.02) shall serve as the governing statutory and regulatory authority for completing the development activities on Sub-Parcel B7-2 and complement the statutory requirements of the VCP (Section 7-501 of the Environment Article). Upon submission of a RADWP and completion of any remedial activities for the sub-parcel, the MDE shall issue a No Further Action Letter (NFA) upon a recordation of an Environmental Covenant describing any necessary land use controls for the specific sub-parcel. At such time that all the sub-parcels within the larger parcel have completed remedial activities, Tradepoint Atlantic shall submit to the MDE a request for issuing a Certificate of Completion (COC) as well as all pertinent information concerning completion of remedial activities conducted on the parcel. Once the VCP has completed its review of the submitted information it shall issue a COC for the entire parcel described in Tradepoint Atlantic's VCP application.

Alternatively, Tradepoint Atlantic or other entity may elect to submit an application for a specific sub-parcel and submit it to the VCP for review and acceptance. If the application is received after the cleanup and redevelopment activities described in this RADWP are implemented and a NFA is issued by the Agencies pursuant to the CHS Act, the VCP shall prepare a No Further Requirements Determination for the sub-parcel.

If Tradepoint Atlantic or other entity has not carried out cleanup and redevelopment activities described in the RADWP, the cleanup and redevelopment activities may be conducted under the oversight authority of either the VCP or the CHS Act, so long as those activities comport with this RADWP.

This RADWP provides a site description and history; summary of environmental conditions identified by the 2014 Phase I Environmental Site Assessment (ESA); summary of relevant findings and environmental conditions identified by the relevant Phase II Investigations conducted between 2015 and 2020; a human health Screening Level Risk Assessment (SLRA) conducted for the identified conditions; and any necessary engineering and/or institutional controls to facilitate the planned development and address the impacts and potential human health exposures. These controls include work practices and applicable protocols that are submitted for approval to support the development and use of the Site. Engineering/institutional controls approved and installed for this RADWP shall be described in closure certification documentation submitted to the Agencies demonstrating that exposure pathways on the Site are addressed in a manner that protects public health and the environment.

The remainder of Parcel B7 will be addressed in separate development plans in accordance with the requirements of the ACO, which may include RADWPs, if necessary. This work will include assessments of risk and, if necessary, RADWPs to address unacceptable risks associated with future land use. As discussed below, temporary external construction worker areas with a total area of 1.97 acres will be utilized to install utility connections for the project outside of the sub-parcel. The temporary work outside of the boundary of the Site is not intended to be the basis for the issuance of a NFA or a COC, although the scope of construction is covered by this RADWP.

## 2.0 SITE DESCRIPTION AND HISTORY

### 2.1 SITE DESCRIPTION

The Sub-Parcel B7-2 development project consists of approximately 11.6 acres comprising a portion of Parcel B7 (**Figure 1**). The development will include completion of a 204,000 square foot warehouse (**Figure 2**). Outside of the main development area designated as Sub-Parcel B7-2, temporary external construction worker areas (not intended for permanent occupancy) with a total area of approximately 1.97 acres within the construction Limit of Disturbance (LOD) will be utilized to install subgrade utility connections for the project. The Site is currently zoned Manufacturing Heavy-Industrial Major (MH-IM) and is not occupied. There is no groundwater use on-site or within the surrounding Tradepoint Atlantic property.

Ground surface elevations at the Site range from approximately 12 to 16 feet above mean sea level (amsl), with the majority of the Site being relatively flat. According to Figure B-2 of the property Stormwater Pollution Prevention Plan Revision 9 dated September 27, 2021, surface water runoff from the Site is conveyed to the east and is discharged into Old Road Bay through National Pollutant Discharge Elimination System (NPDES) permitted Outfall 017.

### 2.2 SITE HISTORY

From the late 1800s until 2012, the production and manufacturing of steel was conducted at Sparrows Point. Iron and steel production operations and processes at Sparrows Point included raw material handling, coke production, sinter production, iron production, steel production, and semi-finished and finished product preparation. In 1970, Sparrows Point was the largest steel facility in the United States, producing hot and cold rolled sheets, coated materials, pipes, plates, and rod and wire. The steel making operations at the facility ceased in fall 2012.

There are several existing wooded areas which occupy large portions Parcel B7. Near the southern end of Parcel B7, a network of unpaved roads is present within the existing wooded areas. Although not labeled on the available historical steel plant drawings, historical aerial images (1952) available through Johns Hopkins University online databases indicate that this southern wooded area was formerly occupied by residential housing for mill workers. The historical steel plant drawings indicate the presence of three baseball fields in within the Site in an area formerly occupied by the golf course. Several railways are present running from north to south through Parcel B7, but there do not appear to be any significant steel production activities which occurred historically within the Parcel.

### 2.3 SITE GRADING ACTIVITIES

In July 2022, TPA collected one 5-point composite soil sample from each of ten sections within Site B7-2. Refer to **Appendix B** for the map with the sampling grid and laboratory results. In an

August 9, 2022 email, TPA requested approval to use the top 2-feet of soil across the Site as clean cap material. Later emails clarified that the material appears to be free of slag, and that it would be stockpiled for reuse at B7-2 and potentially other areas within Sparrows Point. Agency approval to use the material as clean cap material was received via email on August 18, 2022, with the following conditions: 1) an Environmental Professional be onsite to oversee the work; 2) any encountered slag is stockpiled separately for additional sampling; 3) the material from quadrant S-1 can be used under a VCP cap only due to elevated manganese; and 4) that all material must be tracked. The Agencies further clarified via email on April 20, 2023 that the material was acceptable for unrestricted use on both commercial and industrial parcels with Sparrows Point (with the exception of quadrant S-1). All email correspondence is included in **Appendix B**.

As part of the Site preparation activities, excavation / grading work was conducted and approximately 1.5-feet of soil was removed and stockpiled from across the entire Site. Material was also removed from quadrant S-1 and stockpiled separately. In September 2022, preliminary grading activities, including slag fill was placed across the Site to raise the elevation to approximately 17 feet amsl. All work was completed in accordance with the Sub-Parcel B7-2 Grading Plan (Revision 0, August 2, 2022). All Site preparation and grading activities will be included in the Development Completion Report.

### 3.0 ENVIRONMENTAL SITE ASSESSMENT RESULTS

#### 3.1 PHASE I ENVIRONMENTAL SITE ASSESSMENT RESULTS

A Phase I ESA was completed by Weaver Boos for the entire Sparrows Point property on May 19, 2014. Weaver Boos completed site visits of Sparrows Point from February 19 through 21, 2014, for the purpose of characterizing current conditions at the former steel plant. The Phase I ESA identified particular features across the Tradepoint Atlantic property which presented potential risks to the environment. These RECs included buildings and process areas where releases of hazardous substances and/or petroleum products potentially may have occurred. The Phase I ESA also relied upon findings identified during a previous visual site inspection (VSI) conducted in 1991 as part of the RCRA Facility Assessment prepared by A.T. Kearney, Inc. dated August 1993, for the purpose of identifying Solid Waste Management Units (SWMUs) and Areas of Concern (AOCs) on the property. This VSI is regularly cited in Description of Current Conditions (DCC) Report prepared by Rust Environment and Infrastructure (January 1998).

Weaver Boos' distinction of a REC or Non-REC was based upon the findings of the DCC Report (which was prepared when the features remained on-site in 1998) or on observations of the general area during their site visit. Weaver Boos made the determination to identify a feature as a REC based on historical information, observations during the site visit, and prior knowledge and experience with similar facilities. There were no RECs, Findings, SWMUs, or AOCs identified within the Sub-Parcel B7-2 development area.

#### 3.2 PHASE II INVESTIGATION RESULTS – SUB-PARCEL B7-2

Phase II Investigations specific to soil and groundwater conditions were performed for the property area including Sub-Parcel B7-2 in accordance with the requirements outlined in the ACO as further described in the following agency-approved Phase II Investigation Work Plans:

- Area B: Parcel B7 and Parcel B25 (Revision 1) dated May 22, 2018
- Area B: Parcel B3 (Revision 1) dated May 17, 2017
- Area B Groundwater (Revision 3) dated October 6, 2015

All soil samples and groundwater samples were collected and analyzed in accordance with agency-approved protocols during the Phase II Investigations, the specific details of which can be reviewed in each agency-approved Work Plan. Each Phase II Investigation was developed to target specific features which represented a potential release of hazardous substances and/or petroleum products to the environment, including RECs, SWMUs, and AOCs, as applicable, as well as numerous other targets identified from former operations that would have the potential for environmental contamination. Samples were also collected at site-wide locations to ensure full coverage of each investigation area. The full analytical results and conclusions of each investigation have been presented to the agencies in the following Phase II Investigation Reports:

- Area B: Parcel B7 and Parcel B25 (Revision 0) dated March 24, 2021
- Area B: Parcel B3 (Revision 0) dated April 13, 2018
- Area B Groundwater (Revision 0) dated September 30, 2016

This RADWP summarizes the relevant soil and groundwater findings from these Phase II Investigations with respect to the proposed development of Sub-Parcel B7-2.

### 3.2.1 Phase II Soil Investigation Findings

Based on the scope of development for Sub-Parcel B7-2, 27 soil samples collected from 10 soil borings (including one soil boring from the Parcel B3 Phase II Investigation and nine soil borings from the Parcel B7 and Parcel B25 Phase II Investigation) were included in this evaluation of Sub-Parcel B7-2. The 10 boring locations are shown on **Figure 3**, and the samples obtained from these borings provided relevant analytical data for discussion of on-site conditions.

Soil samples collected during the Phase II Investigation were analyzed for the Target Compound List (TCL) volatile organic compounds (VOCs), TCL semi-volatile organic compounds (SVOCs) and polynuclear aromatic hydrocarbons (PAHs), Oil & Grease, Target Analyte List (TAL) metals, hexavalent chromium, and cyanide. Shallow soil samples (0 to 1 foot below ground surface (bgs)) were analyzed for polychlorinated biphenyls (PCBs). Soil sampling targets with potential petroleum contamination were also analyzed for total petroleum hydrocarbon (TPH) diesel range organics (DRO) and gasoline range organics (GRO). The laboratory Certificates of Analysis (including Chains of Custody) and Data Validation Reports are included as electronic attachments. The Data Validation Reports contain qualifier keys for the flags assigned to individual results in the attached summary tables.

Soil sample results were screened against the Project Action Limits (PALs) established in the property-wide Quality Assurance Project Plan (QAPP) dated April 5, 2016, or based on other direct agency guidance. Several PALs have been adjusted based on revised toxicity data published by the USEPA (May 2021). **Table 1** and **Table 2** provide summaries of the detected organic compounds and inorganics in the soil samples collected from the soil borings relevant for this Site evaluation. **Figure S1** presents the soil sample results that exceeded the PALs among these soil borings. PAL exceedances were limited to one inorganic (arsenic).

Non-aqueous phase liquid (NAPL) was not observed in any of the Phase II soil boring location.

### 3.2.2 Phase II Groundwater Investigation Findings

Groundwater conditions were investigated as reported in the Area B Groundwater Phase II Investigation Report (Revision 0 dated September 30, 2016). This report included the installation and sampling of two monitoring wells (SW-045-MWS and SW-048-MWS). These two locations were resampled in February 2023 to provide more recent groundwater data for the Site. The two monitoring points provide relevant analytical data for the proposed Sub-Parcel B7-2 development



project and are shown on **Figure 4**. There is no direct exposure risk for future Composite Workers at the Site because there is no use of groundwater on the Tradepoint Atlantic property; however, groundwater may be encountered in the sub-parcel during some construction tasks. If groundwater is encountered, it will be managed to prevent exposures in accordance with the dewatering requirements outlined in Section 5.2. Additionally, vapor intrusion (VI) risks are evaluated in Section 3.2.3.

Each groundwater monitoring point was inspected for evidence of NAPL using an oil-water interface probe prior to sampling. None of the monitoring points relevant for the proposed development project showed evidence of NAPL during these checks. The groundwater samples were analyzed for TCL-VOCs, TCL-SVOCs, TAL metals, hexavalent chromium, total cyanide, TPH-DRO, TPH-GRO, and Oil & Grease. The laboratory Certificates of Analysis (including Chains of Custody) and Data Validation Reports are included as electronic attachments. The Data Validation Reports contain qualifier keys for the flags assigned to individual results in the attached summary tables.

The Phase II Investigation groundwater results were screened against the PALs established in the property-wide QAPP dated April 5, 2016, or based on other direct agency guidance. Similar to the evaluation of soil data, several PALs have been adjusted based on revised toxicity data published by the USEPA (May 2021). **Table 3** and **Table 4** provide summaries of the detected organic compounds and inorganics in the groundwater samples submitted for laboratory analysis during both the 2016 and 2023 sampling events, and **Figure GW1** presents the 2023 groundwater results that exceeded the PALs. PAL exceedances in the Phase II Investigation and supplemental groundwater in the vicinity of the proposed development project consisted of Oil & Grease and three dissolved metals (cobalt, iron, and manganese – all slag related compounds).

### 3.2.3 Locations of Potential Concern

Groundwater data were screened to determine whether any sample results exceeded the USEPA Vapor Intrusion Target Cancer Risk (TCR) (carcinogen) or Target Hazard Quotient (THQ) (non-carcinogen) Screening Levels. None of the individual sample results exceeded the cumulative VI cancer risk screening level of 1E-5 or the non-cancer VI Hazard Index (HI) value of 1. Therefore, there are no identified VI risks associated with site development. The VI risk evaluation is summarized in **Table 5**.

Other locations of potential concern which are subject to special requirements could include elevated lead, PCBs, or TPH/Oil & Grease in soil. The soil data for Sub-Parcel B7-2 were evaluated to determine the presence of any such locations of potential concern including: lead concentrations above 10,000 mg/kg, PCB concentrations above 50 mg/kg, or TPH/Oil & Grease concentrations above 6,200 mg/kg. There were no soil concentrations of lead, PCBs, or TPH/Oil & Grease above the specified criteria. However, elevated Oil & Grease (6,800 µg/L) was detected



in the groundwater sample collected from SW-048-MWS; while no NAPL was identified in the soil boring, no soil samples were collected for laboratory analysis at this location.

Locations with physical evidence of NAPL are also considered to be locations of potential concern with respect to proposed development. No visual observations of NAPL were noted at any locations for the Site. Additionally, no NAPL was detected in any monitoring wells proximate to the proposed development area.

### 3.3 HUMAN HEALTH SCREENING LEVEL RISK ASSESSMENT

#### 3.3.1 Analysis Process

A human health SLRA has been completed based on the analytical data obtained from the characterization of surface and subsurface soils. The SLRA was conducted to evaluate the existing soil conditions to determine if any response measures are necessary.

The SLRA included the following evaluation process:

**Identification of Exposure Units (EUs):** The Composite Worker SLRA was evaluated using a single Exposure Unit (EU1) with an area of 11.6 acres. EU1 corresponds with the proposed development area. The Construction Worker SLRA was evaluated using a slightly expanded EU (EU1-EXP), covering 13.6 acres in total which includes the 1.97 acres of additional construction worker areas incorporated within the LOD to include the facility utility installation outside of the sub-parcel.

It should be noted that industrial fill including processed slag aggregate sourced from the Tradepoint Atlantic property will be used within the Site; therefore, regardless of the findings of the Composite Worker baseline SLRA, the Site will be subject to surface engineering controls (i.e., capping) unless separate approvals are received from the Agencies following appropriate laboratory testing of the industrial fill materials.

**Identification of Constituents of Potential Concern (COPCs):** For the project-specific SLRA, COPC screening was completed assuming a Target Risk (TR) of 1E-6 and THQ of 0.1. The initial screening also identified parameters detected at a frequency greater than 5%. Based on that data set, parameters were identified as COPCs if:

- The compound was detected in soil at a frequency of greater than 5%; and
- The maximum detection exceeded the USEPA's Composite Worker Soil Regional Screening Levels (RSLs).

A COPC screening analysis is provided in **Table 6** to identify all compounds above the relevant screening levels.

All aroclor mixtures (e.g., Aroclor 1248 and Aroclor 1260) are taken into account for the reported concentrations of total PCBs. The total PCBs concentrations are used to evaluate the carcinogenic risk associated with PCBs.

### **Exposure Point Concentrations (EPCs):**

The COPC soil datasets for each EU were divided into surface (0 to 1 feet bgs), subsurface (>1 feet bgs), and pooled depths for estimation of potential EPCs. Thus, there are three soil datasets associated with each EU. If there were less than 10 sample results, the maximum detected value was used as the soil EPC. If there were 10 or more sample results in the dataset, then a statistical analysis was performed using the ProUCL software (version 5.0) developed by the USEPA to determine representative reasonable maximum exposure (RME) values for the EPC for each constituent. The RME value is typically the 95% Upper Confidence Limit (UCL) of the mean. For lead, the arithmetic mean for each depth was calculated for comparison to the Adult Lead Model (ALM)-based values (presented in **Table 7**).

**Risk Ratios:** The surface soil EPCs, subsurface soil EPCs, and pooled soil EPCs were compared to the USEPA RSLs for the Composite Worker and to site-specific Soil Screening Levels (SSLs) for the Construction Worker based on equations derived in the USEPA Supplemental Guidance for Developing Soil Screening Levels for Superfund Sites (OSWER 9355.4-24, December 2002). Risk ratios were calculated with a cancer risk of  $1E-6$  and a non-cancer HQ of 1. The risk ratios for the carcinogens were summed to develop a screening level estimate of the baseline cumulative cancer risk. The risk ratios for the non-carcinogens were segregated and summed by target organ to develop a screening level estimate of the baseline cumulative non-cancer HI.

For the Construction Worker, site-specific risk-based evaluations were completed for a range of potential exposure frequencies to determine the maximum allowable exposure frequency for the site-wide EU1-EXP that would result in risk ratios equivalent to a cumulative cancer risk of  $1E-5$  or HI of 1 for the individual target organs. This analysis indicated that the allowable exposure frequency before additional worker protections or more detailed job safety evaluations might be needed is 165 days.

There is no potential for direct human exposure to groundwater for a Composite Worker since groundwater is not used on the Tradepoint Atlantic property (and is not proposed to be utilized). In the event that construction/excavation leads to a potential Construction Worker exposure to groundwater during development, health and safety plans and management procedures shall be followed to limit exposure risk.

**Assessment of Lead:** For lead, the arithmetic mean concentrations for surface soils, subsurface soils, and pooled soils for the site-wide EU were compared to the applicable

RSL (800 mg/kg) as an initial screening. If the mean concentrations for the EU were below the applicable RSL, the EU was identified as requiring no further action for lead. If a mean concentration exceeded the RSL, the mean values were compared to calculated ALM values (ALM Version dated 6/21/2009 updated with the 5/17/2017 OLEM Directive) with inputs of 1.8 for the geometric standard deviation and a blood baseline lead level of 0.6 micrograms lead per deciliter of blood (ug/dL). The ALM calculation generates a soil lead concentration of 2,518 mg/kg, which represents the concentrations such that there would be no more than a 5% probability that fetuses exposed to lead would exceed a blood lead of 10 µg/dL. If the arithmetic mean concentrations for the EU were below 2,518 mg/kg, the EU was identified as requiring no further action for lead. The lead averages are presented for surface, subsurface, and pooled soils in **Table 7**. Neither surface, subsurface, nor pooled soils exceeded an average lead concentration of 800 mg/kg.

**Assessment of TPH/Oil & Grease:** EPCs were not calculated for TPH/Oil & Grease. Instead, the individual results were compared to the PAL set to a HQ of 1 (6,200 mg/kg). No soil sample results exceeded the PAL for TPH or Oil & Grease.

**Risk Characterization Approach:** Generally, if the baseline risk ratio for each non-carcinogenic COPC or cumulative target organ does not exceed 1, and the sum of the risk ratios for the carcinogenic COPCs does not exceed a cumulative cancer risk of 1E-5, then a no further action determination will be recommended. If the baseline estimate of cumulative cancer risk exceeds 1E-5 but is less than or equal to 1E-4, then capping of the EU will be considered to be an acceptable remedy for the Composite Worker. The efficacy of capping for elevated non-cancer hazard will be evaluated in terms of the magnitude of exceedance and other factors such as bioavailability. For the Construction Worker, cumulative cancer risks exceeding 1E-5 (but less than or equal to 1E-4) or HI values exceeding 1 will be mitigated via site-specific health and safety requirements.

It should be noted that industrial fill including processed slag aggregate sourced from the Tradepoint Atlantic property will be used at the Site; therefore, regardless of the findings of the Composite Worker baseline assessment, the Site will be subject to surface engineering controls (i.e., capping) unless separate approvals are received from the Agencies following appropriate laboratory testing of the industrial fill materials. The goal of the SLRA is therefore to determine whether additional response actions beyond capping may be needed due to current conditions at the Site.

The USEPA's acceptable risk range is between 1E-6 and 1E-4. If the sum of the risk ratios for carcinogens exceeds a cumulative cancer risk of 1E-4, further analysis of site conditions will be required including the consideration of toxicity reduction in any proposal for a remedy. The magnitude of any non-carcinogen HI exceedances and bioavailability of the COPC will also dictate further analysis of site conditions including consideration of toxicity reduction in any proposal for a remedy.

### 3.3.2 SLRA Results and Risk Characterization

Soil data were divided into three datasets (surface, subsurface, and pooled) for Sub-Parcel B7-2 to evaluate potential exposure scenarios. Due to the grading activities including cut and fill which will be implemented during development at the Site (covered by the Sub-Parcel B7-2 Grading Plan dated August 2, 2022; which was developed for preparatory grading work associated with the project), each of these potential exposure scenarios is relevant for the SLRA.

EPCs were calculated for each soil dataset (i.e., surface, subsurface, and pooled soils) in each EU. ProUCL output tables (with computed UCLs) derived from the data for each COPC in soils are provided as electronic attachments, with computations presented and EPCs calculated for COPCs within each of the datasets. The ProUCL input tables are also included as electronic attachments. The results were evaluated to identify any samples that may require additional assessment or special management based on the risk characterization approach. The calculated EPCs for the surface, subsurface, and pooled exposure scenarios are provided in **Table 8**.

As indicated above, the EPCs for lead are the average (i.e., arithmetic mean) values for each dataset. A lead evaluation spreadsheet, providing the computations to determine lead averages for each dataset, is also included as an electronic attachment. The average and maximum lead concentrations are presented for each dataset in **Table 7**, which indicates that neither surface, subsurface, nor pooled soils exceeded an average lead concentration of 800 mg/kg.

#### Composite Worker Assessment:

Risk ratios for the estimates of potential EPCs for the Composite Worker baseline scenario prior to the placement of industrial fill at the Site are shown in **Table 9** (surface), **Table 10** (subsurface), and **Table 11** (pooled). The results are summarized as follows:

Worker Scenario	Exposure Unit	Medium	Hazard Index (>1)	Total Cancer Risk
Composite Worker	EU1 (11.6 acres)	Surface Soil	none	5E-6
		Subsurface Soil	none	2E-6
		Pooled Soil	none	2E-6

Based on the risk ratios for Sub-Parcel B7-2, capping is not necessary to be protective of future Composite Workers for the surface, subsurface, and pooled exposure scenarios. None of the cancer risk values exceeded 1E-5 and none of the non-carcinogenic HI values exceeded 1. However, slag aggregate will be used as the primary fill material and pavement subbase at the Site. Therefore, environmental capping will be required to be protective of future Composite Workers.

**Construction Worker Assessment:**

Ground intrusive activities which could result in potential Construction Worker exposures are expected to be limited primarily to utility installation tasks performed by specific work crews. Construction Worker risks were evaluated for several different exposure scenarios to determine the maximum exposure frequency for the site-wide EU1-EXP that would result in risk ratios equivalent to a cumulative cancer risk of 1E-5 or HI of 1 for any individual target organ. Risk ratios for the Construction Worker scenario using the selected duration (165 days) are shown in **Table 12** (surface), **Table 13** (subsurface), and **Table 14** (pooled). The variables entered for calculation of the site-specific Construction Worker SSLs (EU area, input assumptions, and exposure frequency) are indicated as notes on the tables. The spreadsheet used for computation of the site-specific Construction Worker SSLs is included as **Appendix C**. The results are summarized as follows:

<b>Worker Scenario</b>	<b>Exposure Unit</b>	<b>Medium</b>	<b>Hazard Index (&gt;1)</b>	<b>Total Cancer Risk</b>
Construction Worker	EU1-EXP (13.6 acres) (165 exposure days)	Surface Soil	none	4E-7
		Subsurface Soil	none	3E-7
		Pooled Soil	none	3E-7

Using the selected exposure duration for the site-wide EU1-EXP (165 days), the carcinogenic risks were all less than 1E-5, and none of the non-carcinogens caused a cumulative HI to exceed 1 for any target organ system. These findings are below the acceptable limits for no further action established by the agencies. This evaluation indicates that additional site-specific health and safety requirements (beyond standard Level D protection) would be required only if the allowable exposure duration of 165 days were to be exceeded for an individual worker.

Development activities may exceed the allowable duration. In such an event, Construction Worker risks would be required to be mitigated, warranting additional site-specific health and safety requirements to be protective of workers. Upgraded Personal Protective Equipment (PPE) beyond standard Level D protection will be used for the entire scope of intrusive work covered by this RADWP as a protective measure to ensure that there are no unacceptable exposures for Construction Workers during project implementation. The modified Level D PPE requirements which will be applied immediately and throughout this project, including specific PPE details, planning, tracking/supervision, enforcement, and documentation, are outlined in the PPE Standard Operational Procedure (SOP) provided as **Appendix D**.

Institutional controls will be required to be established for the protection of future Construction Workers in the event of any future long-term construction projects which could include intrusive

activities. The anticipated institutional controls, including notification requirements, health and safety requirements, and materials management requirements, are specified in Section 5.4.

### 3.3.3 Evaluation of RCRA Criteria

Tradepoint Atlantic will be using industrial fill (including processed slag aggregate) throughout the Site. Therefore, environmental capping is required within the development area to mitigate potential Composite Worker risks. The entirety of the Site (11.6 acres) will therefore require a remedy of capping with institutional controls to mitigate potential Composite Worker risks.

Site-specific health and safety controls will be implemented to mitigate Construction Worker risks within the sub-parcel. This includes using modified Level D PPE. The modified Level D PPE requirements will be implemented throughout the project duration in accordance with the PPE SOP provided as **Appendix D**. Institutional controls will also be required to be established for the protection of future Construction Workers in the event of any future long-term construction projects which could include intrusive activities.

The proposed VCP capping remedy with institutional controls was evaluated for consistency with the RCRA Threshold Criteria and Balancing Criteria. The Threshold Criteria assess the overall protection of human health and the environment, as well as achievement of media cleanup objectives and control of sources of releases at the Site. The Balancing Criteria assess long-term effectiveness and permanence; reduction of toxicity, mobility or volume; short-term effectiveness; implementability; cost effectiveness; and community and State acceptance.

#### **Threshold Criteria:**

**Protect Human Health and the Environment:** The assessment against this criterion evaluates how the remedy, as a whole, protects and maintains protection of human health and the environment. This criterion is satisfied when response actions are complete. The purpose of this remedy is to provide a protective barrier between human site users and impacted materials, and to protect the environment by preventing surface water from contacting potentially impacted materials in place. The capping and institutional control remedy would eliminate risk to current and future industrial workers by preventing exposure to areas of the Site where processed slag aggregate has been placed or where soil concentrations exceed a cancer risk of  $1E-5$  or a HI of 1. Groundwater does not present a direct human health hazard since there is no groundwater use on the property. Implementation of the proposed use restrictions will address the residual risk and will also protect future workers by eliminating or controlling potential exposure pathways, thus, reducing potential intake and contact of soil/groundwater COPCs by human receptors.

**Achieve Media Cleanup Objective:** The assessment against this criterion describes how the remedy meets the cleanup objective, which is risk reduction, appropriate for the



expected current and reasonably anticipated future land use. The objective is to protect current/future Composite Workers and Construction Workers from potential exposures to COPCs present in soil or groundwater at levels that may result in risks of adverse health effects. Given the controlled access and use restrictions, the proposed remedy will attain soil and groundwater objectives. The activity use restrictions will eliminate current and future unacceptable exposures to both soil and groundwater.

**Control the Source of Releases:** In its RCRA Corrective Action proposed remedies, USEPA seeks to eliminate or reduce further releases of hazardous wastes or hazardous constituents that may pose a threat to human health and the environment. Controlling the sources of contamination relates to the ability of the proposed remedy to reduce or eliminate, to the maximum extent practicable, further releases. Sampling results did not indicate localized, discernible source areas associated with the soil conditions observed at the Site. The control measures included in the proposed remedy, such as Materials Management Plan requirements and groundwater use restrictions, provide a mechanism to control and reduce potential further releases of COPCs. This is achieved by eliminating the potential for groundwater use and requiring proper planning for intrusive activities.

### **Balancing Criteria:**

**Long-Term Reliability and Effectiveness:** The assessment against this criterion evaluates the long-term effectiveness of the remedy in maintaining protection of human health and the environment after the response objectives have been met. The primary focus of this criterion is the extent and effectiveness of the controls that may be required to manage the risk posed by slag aggregate, treatment residuals, and/or untreated wastes. The proposed capping remedies have been proven to be effective in the long-term at similar sites with similar conditions. The capping remedy will permanently contain the slag aggregate and other potentially contaminated media in place. In order for the cap to effectively act as a barrier, regular inspections will be performed pursuant to the Institutional Control Operations and Maintenance Plan (O&M Plan).

Institutional controls will be implemented to protect future Composite and Construction Workers against inadvertent contact with potentially impacted media. The anticipated institutional controls are specified in Section 5.4. The proposed remedy will maintain protection of human health and the environment over time by controlling exposures to the hazardous constituents potentially remaining in slag aggregate or existing on-site media. The long-term effectiveness is high, as use restrictions are readily implementable and easily maintained. Given the historical, heavily industrial uses of the Site and the surrounding area, including the presence of landfills, land and groundwater use restrictions are expected to continue in the long term.

**Reduction of Toxicity, Mobility, or Volume of Waste:** The assessment against this criterion evaluates the anticipated performance of specific technologies that a remedial

action alternative may employ. The capping remedy will prevent the spread of contaminants in wind-blown dust or stormwater and will prevent infiltration through the unsaturated zone from carrying contaminants to the groundwater. Thus, the mobility of contaminants will be reduced by the capping remedy.

**Short-term Effectiveness:** The assessment against this criterion examines how well the proposed remedy protects human health and the environment during the construction and implementation until response objectives have been met. This criterion also includes an estimate of the time required to achieve protection for either the entire site or individual elements associated with specific site areas or threats. The risks to the Construction Worker during remedy implementation are mitigated by executing the modified Level D PPE requirements outlined in **Appendix D**. The short-term risk to site workers following these upgraded health and safety measures during implementation of the remedy will be low, leading to a high level of short-term effectiveness for protection of future site users and the environment. Short-term effectiveness in protecting on-site workers and the environment will be achieved through establishing appropriate management, construction, health and safety, and security procedures. Proper water management protocols will be implemented to prevent discharges offsite. Security will be used to maintain controlled access during construction.

**Implementability:** The assessment against this criterion evaluates the technical and administrative feasibility, including the availability of trained and experienced personnel, materials, and equipment. Technical feasibility includes the ability to construct and operate the technology, the reliability of the technology, and the ability to effectively monitor the technology. Administrative feasibility includes the capability of obtaining permits, meeting permit requirements, and coordinating activities of governmental agencies. The proposed capping remedy for the Composite Worker area will use readily available, typically acceptable, and proven technologies.

**Cost Effectiveness:** The assessment against this criterion evaluates the capital costs, annual O&M costs, and the net present value (NPV) of this remedy relative to alternatives. The capping remedy remedial costs would be incurred as part of the proposed site development, regardless of the findings of the SLRA.

**State Support / Agency Acceptance:** The Agencies have been involved throughout the Site investigation process. The proposed use restrictions included in the proposed remedy are generally recognized as commonly employed measures for long-term stewardship.

A capping remedy with institutional controls would satisfy the CERCLA Threshold Criteria and the Balancing Criteria and would do so in a manner that ensures reliable implementation and effectiveness. The remedy is cost-effective and consistent with the proposed development plan for the Site.



## 4.0 PROPOSED SITE DEVELOPMENT PLAN

Tradepoint Atlantic is proposing the construction of a 204,000 square foot warehouse on Sub-Parcel B7-2. The proposed development will include permanent improvements on approximately 11.6 acres located within Parcel B7. The proposed future use of Sub-Parcel B7-2 is Tier 3 – Industrial. The remainder of Parcel B7 will be addressed in separate development plans in accordance with the requirements of the ACO that will include RADWPs, if necessary. Outside of the main development area, temporary external construction worker areas with a total area of approximately 1.97 acres will be utilized to install the subgrade utility connections for the project. The temporary work outside of the boundary of the Site is not intended to be the basis for the issuance of a NFA or a COC, although the scope of construction work is covered by this RADWP. The Site (11.6 acres encompassing Sub-Parcel B7-2; excluding the temporary construction worker areas) will be capped by surface engineering controls.

Certain compounds are present in the soils located near the surface and in the subsurface at concentrations in excess of the PALs. Therefore, soil is considered a potential media of concern. Potential risks to future adult workers associated with impacts to soil and groundwater exceeding the PALs will be addressed through a remedy consisting of surface engineering controls (capping) and institutional controls (deed restrictions for B7-2). The development plan provides for a containment remedy and institutional controls that will mitigate future adult workers from contacting impacted soil at the Site. In addition, Tradepoint Atlantic has proposed the use of processed slag aggregate as the primary fill material and pavement subbase. The placement of materials other than approved clean fill, such as slag aggregate, requires the installation of surface engineering controls regardless of the existing soil conditions.

Future Construction Workers may contact impacted surface and/or subsurface soil during earth movement activities associated with construction activities, including within the temporary external construction worker areas outside of the primary development area. The findings of the Construction Worker SLRA indicated that using the site-specific 165-day exposure frequency for the site-wide EU1-EXP, the screening level estimates of Construction Worker cancer risk were less than 1E-5 and no HI values above 1 were identified for any target organ system (the acceptable thresholds for no further action).

Development activities at the Site are not expected to exceed the allowable duration; however additional site-specific health and safety requirements will be implemented as a conservatism to be protective of workers. Upgraded PPE beyond standard Level D protection will be used in conjunction with the property-wide Health and Safety Plan (HASP) for the entire scope of intrusive work covered by this RADWP as a protective measure to ensure that there are no unacceptable exposures for Construction Workers during project implementation. The modified Level D PPE requirements which will be applied throughout this project, including specific PPE details, planning, tracking/supervision, enforcement, and documentation, are outlined in the PPE SOP provided as **Appendix D**.

A restriction prohibiting the use of groundwater for any purpose at the Site will be included as an institutional control in the NFA and COC issued by the Agencies, and a deed restriction prohibiting the use of groundwater will be filed. The groundwater use restriction will protect future Composite Workers from potential direct exposures. Proper water management is required to prevent unacceptable discharges or risks to Construction Workers during development. Work practices and health and safety plans governing groundwater encountered during excavation activities will provide protection for Construction Workers involved with development at the Site.

The development plan for the Site is shown on **Figure 2**. Detailed development plan drawings are included as **Appendix E**. The process of constructing the proposed warehouse will involve the tasks listed below. Documentation of the outlined tasks and procedures will be provided in a Sub-Parcel B7-2 Development Completion Report.

#### **4.1 RESPONSE PHASE – GROUNDWATER NETWORK MODIFICATION**

As shown on **Figure 4**, monitoring well SW-048-MWS is located within the development LOD. Prior to development, this monitoring well will be abandoned in accordance with COMAR 26.04.04.34 through 36.

The abandonment of any permitted groundwater wells must be reported to the Water Management Administration as per COMAR 26.04.04, and records of all groundwater well and piezometer abandonments (including abandonment forms, if available) will be included in the Development Completion Report. It is understood that the agencies may require the installation of additional permanent monitoring wells in the future following site development.

#### **4.2 DEVELOPMENT PHASE**

##### **4.2.1 Erosion and Sediment Control Installation**

Installation of erosion and sediment controls will be completed in accordance with the requirements of the 2011 Maryland Standards and Specifications for Soil Erosion and Sediment Control prior to any construction at the Site. Any soils within EU1 which are disturbed during the installation of erosion and sediment controls will be placed on-site below the cap.

##### **4.2.2 Grading and Site Preparation**

Grading activities including both cut and fill will occur within the Sub-Parcel B7-2 boundary. As stated above, preliminary grading has already commenced at the Site and is covered by the Sub-Parcel B7-2 Grading Plan dated August 2, 2022. Any material that is not suitable for compaction will be excavated and replaced with subbase material, although it is not anticipated that poor soils will be encountered. Borrow materials will be obtained from Agency-approved sources and will be documented prior to transport to the Site. Processed slag aggregate sourced from the Tradepoint Atlantic property will be used as fill within the Site. Other materials approved by the Agencies for

industrial use may also be used as fill, but the placement of materials other than approved clean fill will necessitate that the Site will be subject to surface engineering controls (i.e., capping). Fill sources shall be free of organic material, frozen material, or other deleterious material. In the case that there is excess material (not anticipated), the spoils will be stockpiled at a suitable location and dealt with in accordance with the Materials Management Plan (MMP) for the Sparrows Point Facility (Jenkins Environmental, Inc., August 17, 2021). This work will be coordinated with Agencies accordingly. No excess material will leave the 3,100-acre property without prior approval from Agencies.

#### 4.2.3 Installation of Structures and Underground Utilities

The warehouse and other infrastructure associated with the development of Sub-Parcel B7-2 will be installed as shown on **Figure 2**. Soils relocated or removed during construction or utility trenches may be replaced on-site below the cap based on field observations by the Environmental Professional (EP). Additional protocols for soil monitoring during the installation of utilities at the Site are provided in Section 5.1.2. Any water removed will be sampled (if necessary) as described in Section 5.2 and (if acceptable) sent to the on-site Humphrey Creek Wastewater Treatment Plant (HCWWTP).

#### 4.2.4 Paving

As shown on **Figure 5** a significant portion of the Site will be covered with paving. The paved areas will receive a layer of subbase material which will consist of compacted aggregate base, which may include processed slag aggregate sourced from the Tradeport Atlantic property. The placement of processed slag aggregate or materials other than Agency-approved clean fill will necessitate that the Site will be subject to surface engineering controls (i.e., capping).

The required minimum thicknesses of all site-wide pavement sections which will serve as surface engineering controls are shown in the minimum capping section details provided in **Appendix F**. All paved areas at the Site will be installed with a minimum of 4 inches of compacted aggregate base and a minimum of 4 inches of overlying pavement surface (asphalt or concrete), which meet these required minimum thicknesses.

#### 4.2.5 Stormwater Management

New stormwater infrastructure will be installed throughout the Site and will discharge to the north of the Site. Based on the shallow groundwater elevation measurements collected during the site-wide groundwater elevation investigation, excavations may encounter groundwater. As shown on **Figure 6**, the site-wide shallow groundwater elevations range from approximately 12 feet amsl (in the north) to 4 feet amsl (in the south). During the Phase II Investigation, shallow groundwater was observed between 1 and 5 feet bgs within the Site. Water removed will be managed as described in Section 5.2.

The stormwater management systems for each parcel are reviewed and approved by Baltimore County for each individual development project.

## 5.0 DEVELOPMENT IMPLEMENTATION PROTOCOLS

### 5.1 DEVELOPMENT PHASE

This plan presents protocols for the handling of soils and fill materials in association with the development of Sub-Parcel B7-2. In particular, this plan highlights the minimum standards for construction practices and managing potentially contaminated materials to reduce potential risks to workers and the environment.

Several exceedances of the PALs were identified in soil samples across the Site. The PALs are set based on USEPA's RSLs for industrial soils, or other direct guidance from the MDE. Because PAL exceedances can present potential risks to human health and the environment at certain concentrations, this plan presents material management and other protocols to be followed during the work to adequately mitigate potential risks from such materials remaining on-site during the development phase. There were no locations in the proposed Site boundary with soil exceedances of the special management criteria for PCBs (50 mg/kg), lead (10,000 mg/kg), or TPH/Oil & Grease (6,200 mg/kg). NAPL was not detected in any soil borings or on the water table in any piezometers or monitoring wells within the proposed development area. However, elevated Oil & Grease (6,800 µg/L) was detected in the groundwater sample collected from SW-048-MWS; while no NAPL was identified in the soil boring, no soil samples were collected for laboratory analysis at this location.

Following completion of the SLRA, the findings of the Construction Worker evaluation indicated that using the site-specific 165-day exposure frequency for the site-wide EU1-EXP, the screening level estimates of Construction Worker cancer risk were less than 1E-5 and no HI values above 1 were identified for any target organ system (the acceptable thresholds for no further action). Development activities at the Site are not expected exceed the allowable duration of 165 days, however Construction Worker risks will be mitigated to facilitate the proposed construction. Upgraded PPE beyond standard Level D protection will be used in conjunction with the HASP for the entire scope of intrusive work covered by this RADWP as a protective measure to ensure that there are no unacceptable exposures for Construction Workers during project implementation. The modified Level D PPE requirements which will be applied throughout this project, including specific PPE details, planning, tracking/supervision, enforcement, and documentation, are outlined in the PPE SOP provided as **Appendix D**.

Based on the characterization of surface and subsurface soils and the associated SLRA findings, surface engineering controls are an acceptable remedy to be protective of future adult Composite Workers. Tradepoint Atlantic has proposed the use of processed slag aggregate as the primary fill material and pavement subbase within the Site. The placement of materials other than approved clean fill, such as slag aggregate, requires the installation of surface engineering controls (i.e., capping) regardless of the existing soil conditions. The proposed capping sections will meet the

required minimum thicknesses for surface engineering controls, which are provided in **Appendix F**.

### 5.1.1 Erosion/Sediment Control

Erosion and sediment controls will be installed prior to commencing work in accordance with the 2011 Maryland Standards and Specifications for Soil Erosion and Sediment Control. The erosion and sediment controls will be approved by the Agencies. In addition, the following measures will be taken to prevent contaminated soil from exiting the Site:

- Stabilized construction entrance will be placed at site entrance.
- A dry street sweeper will be used as necessary on adjacent roads, and the swept dust will be collected and properly managed.
- Accumulated sediment removed from silt fence, and sediment traps if applicable, shall be periodically removed and returned to the Site.

### 5.1.2 Soil Excavation and Utility Trenching

A pre-excavation meeting shall be held to address proper operating procedures for working on-site and monitoring excavations and utility trenching in potentially contaminated material. This meeting shall include the construction manager and the EP providing oversight on the project. During the meeting, the construction manager and the EP shall review the proposed excavation/trenching locations and any associated utility invert elevations. The construction manager will be responsible for conveying all relevant information regarding excavation/grading and/or utility work to the workers who will be involved with these activities. The HASP and PPE SOP for the project shall also be reviewed and discussed.

The EP will provide oversight of soil excavation/trenching activities as described in Section 5.6. Soil excavation/trenching will occur during various phases of construction. In general, and based on the existing sampling information, all excavated materials are expected to be suitable for replacement on the Site. However, the EP will monitor the soil excavation activities for signs of significantly contaminated material which may not be suitable for reuse (as described below). The EP will also be responsible for monitoring organic vapor concentrations in the worker breathing zone within utility trenches and excavations to determine whether any increased level of health and safety protection is required. Extra awareness of subsurface conditions and EP oversight will be required in the vicinity of SW-048-MWS, where elevated Oil and Grease was detected in the groundwater sample.

To the extent practical, all excavation activities should be conducted in a manner to minimize double or extra handling of materials. Stockpiles shall be stored in a location that is not subjected to concentrated stormwater runoff. Stockpiles shall be managed as necessary to prevent the erosion and off-site migration of stockpiled materials, and in accordance with the applicable provisions of

the 2011 Maryland Standards and Specifications for Soil Erosion and Sediment Control. Soil designated for replacement on-site which does not otherwise exhibit evidence of contamination (as determined by the EP) may be managed in large stockpiles (no size restriction) as long as they remain within the erosion and sediment controls.

A general utility cross section is provided as **Appendix G**. Additional preventative measures will be required if evidence of petroleum contamination is encountered, to prevent the discharge to, or migration of, petroleum product along a utility conduit. Contingency measures have been developed to ensure that utilities will be constructed in a manner that will prevent the migration of any encountered NAPL, and that excavated material will be properly managed. The Utility Excavation NAPL Contingency Plan (**Appendix H**) provides protocols to be followed if NAPL is encountered during the construction activities. Preventative measures to inhibit the spread of petroleum product will be conducted in accordance with this plan.

The EP will monitor all soil excavation and utility trenching activities for signs of potential contamination. In particular, soils will be monitored with a hand-held photoionization detector (PID) for potential VOCs and will also be visually inspected for the presence of staining, petroleum waste materials, or other indications of significant contamination. If there are no visual indications of potential contamination and no elevated PID detections, material removed from excavations/trenching can be re-used as backfill on-site. If screening of excavated materials by the EP indicates the presence of conditions of potential concern (i.e., sustained PID readings greater than 10 ppm, visual staining, unsuitable waste materials, etc.), such materials shall be segregated for additional sampling and special management.

Excavated material exhibiting evidence of significant contamination shall be placed in stockpiles (not to exceed 500 cubic yards) on polyethylene sheeting to minimize potential exposures and erosion when not in use. Materials stockpiled due to evidence of contamination will be sampled in accordance with reuse and/or waste disposal requirements and transported to an appropriate permitted disposal facility. Plans for analysis of segregated soils for any use other than disposal must be submitted to the Agencies for approval.

### 5.1.3 Soil Sampling and Disposal

Excavated materials that are determined by the EP to warrant sampling and analysis because of elevated PID readings or other indications of potential contamination shall be sampled and analyzed to determine how the materials should be managed. If excavated and stockpiled, such materials should be placed on a polyethylene or equivalent tarp to minimize potential exposures and erosion. All stockpiled soil may be considered for use as fill under surface engineering controls at this Site or on other areas of the TPA property depending on the analytical results.

Any soil that is generated from excavations/trenching that is not proposed (or suitable) for reuse within the subject parcel will be sampled to determine the suitability of the material for disposal.



Soil material that is determined to be non-hazardous may be taken to an appropriate non-hazardous landfill (which may include Greys Landfill if approved by TPA) for proper disposal. Soil material that is determined to be a hazardous waste shall be shipped off-site in accordance with applicable regulations to an appropriate and permitted Resource Conservation and Recovery Act (RCRA) disposal facility. A summary of sampling including a description of the material, estimated volume, and sampling parameters will be submitted to the Agencies. The quantities of all materials that require disposal, if any, will be recorded and identified in the Development Completion Report.

#### 5.1.4 Fill

Processed slag aggregate sourced from the Tradepoint Atlantic property will be used as the primary fill material for this project. The placement of processed slag aggregate or materials other than approved clean fill will necessitate that the Site will be subject to surface engineering controls (i.e., capping). Soil excavated on the Sub-Parcel has been determined to be suitable for re-use within the Site, unless such materials are determined by the Agencies to be unsuitable for use as outlined in Section 5.1.2 and Section 5.1.3.

All over-excavated utility trenches will be backfilled with material approved by the Agencies for industrial use. Backfill may include material removed from utility trenches unless such materials are identified by the EP as unsuitable due to elevated PID readings or other indications of potential contamination. As with structural fill, processed slag aggregate and other materials approved for industrial use can be used as backfill in utility trenches on the Site if the area will be covered by a VCP cap. Utility backfill which will extend into the cap (i.e., top 2 feet of backfill in landscaped areas) must meet the VCP clean fill requirements, and a geotextile marker fabric will be placed between the VCP clean fill and any underlying material. Materials permanently placed in areas outside of the Site boundary (i.e., within the temporary external construction worker areas outside of Sub-Parcel B7-2) must meet the VCP clean fill requirements or be otherwise approved by the Agencies prior to placement. A general utility detail drawing is provided as **Appendix G**. Material imported to the Site will be screened according to Agency guidance for suitability.

#### 5.1.5 Dust Control

General construction operations, including grading, will be performed at the Site. These activities are anticipated to be performed in areas of soil impacted with COPCs. Best management practices should be undertaken at the Tradepoint Atlantic property as a whole to prevent the generation of dust which could impact other areas of the property outside of the immediate work zone. To limit worker exposure to contaminants borne in dust and windblown particulates, dust monitoring will be performed during dust-generating activities.

The Environmental Professional (EP) will be responsible for the Site dust monitoring program. This will consist of both monitoring for visible dust as well as real-time dust monitoring. If



sustained visible dust is observed, the General Contractor will implement dust suppression methods to address dust levels at the Site. Such methods may include an increase in the frequency of water trucks spraying vehicle routes, covering of material piles with plastic sheeting, or decreasing drop heights of material from excavation equipment.

Real-time dust monitoring will be implemented using Met One Instruments, Inc. E-Sampler dust monitors or equivalent real-time air monitoring devices will be utilized. Continuous dust monitoring will be performed in the work area as well as perimeter monitors at upwind and downwind locations based on the prevailing wind direction predicted for that day. The prevailing wind direction will be assessed during the day, and the positions of the perimeter monitors may be adjusted if there is a substantial shift in prevailing wind direction.

The action level for determining the need for implementing additional dust suppression methodologies is 3.0 milligrams per cubic meter ( $\text{mg}/\text{m}^3$ ). The lowest of the site-specific dust action levels, Occupational Safety and Health Administration (OSHA) Permissible Exposure Limit (PEL), and American Conference of Governmental Industrial Hygienists (ACGIH) Threshold Limit Value (TLV) was selected. If sustained dust concentrations exceed the action level ( $3.0 \text{ mg}/\text{m}^3$ ) at monitoring locations as a result of conditions occurring at the Site, operations will be stopped temporarily until additional dust suppression can be implemented. Operations may resume once monitoring indicates that dust concentrations are below the action level.

Once all dust-generating activities are complete, the dust monitoring program may be discontinued.

## 5.2 WATER MANAGEMENT

This plan presents the protocols for handling any groundwater or surface water that needs to be removed to facilitate construction of the proposed Sub-Parcel B7-2 development.

### 5.2.1 Groundwater PAL Exceedances

Groundwater samples were collected during the preceding Phase II Investigations from two monitoring wells surrounding the Site. Aqueous PAL exceedances in groundwater in the vicinity of the development LOD included both inorganics and organic compounds. The aqueous PAL exceedances obtained during the February 2023 resampling are summarized on **Figure GW1**. There are no concerns related to potential VI risks/hazards at the Site.

While the concentrations of PAL exceedances are not deemed to be a significant human health hazard for future workers since there is no on-site groundwater use which could lead to direct exposures, proper water management is required during construction to prevent unacceptable discharges or risks to Construction Workers.

### 5.2.2 Dewatering

Dewatering may be necessary to facilitate the placement and compaction of structural fill as well as during ground intrusive work such as the installation of underground utilities or within excavations/trenches. **Figure 6** displays the groundwater elevations underlying the Site for the shallow aquifer zone, based on the 2020 site-wide synoptic gauging event. If dewatering is required during construction, it shall be done in accordance with all local, state, and federal regulations. Water that collects in excavations/trenches due to intrusion of groundwater, stormwater, and/or dust control waters will be managed via one of the following options:

- Transported to be treated at the HCWWTP, following any pretreatment necessary and discharged in accordance with NPDES Permit No. 90-DP-0064; Special Conditions; A.1, A.4, or A.6 (whichever is currently in effect); Effluent Limitations and Monitoring Requirements;
- Discharged to the Baltimore County sanitary sewer system;
- Discharged locally in accordance with the requirements of Special Condition AF, Section 2, Mobile Dewatering Collection and Treatment Unit of NPDES Permit No. 90-DP-0064; or
- Off-site disposal.

The Agencies will be notified which option is selected prior to the generation of groundwater.

If water is sent to the HCWWTP via the Tin Mill Canal, trucking, or direct discharge to a drainage system that flows to the HCWWTP, an applicable outfall dewatering fluids sample will be evaluated pursuant to the HCWWTP Constituent Threshold Limits for Dewatering Activities related to Remediation, Development, and Capping Protocol. Water discharged to the TMC will be pumped through a filter bag, weir frac tank, or equivalent to remove suspended solids prior to discharge.

The EP will inspect water that collects in the excavations/trenches. If the water exhibits indications of significant contamination (e.g., sheen, odor, discoloration, presence of product), the water may be sampled to confirm conditions. If the results of the analyses are above the threshold levels listed below, groundwater at the Site will be further evaluated to confirm acceptable treatment by the HCWWTP, or will be evaluated to design an appropriate pre-treatment option. Alternatively, the water may be disposed of at an appropriate off-site facility.

<u>Analysis</u>	<u>Threshold Levels</u>
• <u>Total metals by USEPA Method 6020A</u>	<u>1,000 ppm</u>
• <u>PCBs by USEPA Method 8082</u>	<u>&gt;Non-Detect</u>
• <u>SVOCs by USEPA Method 8270C</u>	<u>1 ppm</u>
• <u>VOCs by USEPA Method 8260B</u>	<u>1 ppm</u>

- Oil & Grease by USEPA Method 1664 200 ppm
- TPH-DRO by USEPA Method 8015B 200 ppm
- TPH-GRO by USEPA Method 8015B 200 ppm

Documentation of water testing, and the selected disposal option, will be reported to the Agencies in the Development Completion Report. Associated permits or permit modifications related to dewatering will also be included in the Development Completion Report.

### 5.3 HEALTH AND SAFETY

A property-wide HASP has been developed and is provided with this RADWP (as an electronic attachment) to present the minimum requirements for worker health and safety protection for all development projects. All contractors working on the Site may elect to adopt the property-wide HASP or may prepare their own HASP that provides a level of protection at least as much as that provided by the attached HASP.

General health and safety controls (level D protection) are adequate to mitigate potential risk to Construction Workers conducting ground intrusive activities for a duration of up to 165 exposure days. However, certain ground intrusive activities at the Site (utility installations for specific crews) may exceed the allowable duration. Therefore, modified Level D PPE will be used for the entire scope of intrusive work covered by this RADWP as a protective measure to ensure that there are no unacceptable exposures for Construction Workers during project implementation. Health and safety controls outlined in the HASP and PPE SOP will mitigate any potential risk to Construction Workers from contacting impacted soil and groundwater during development. The modified Level D PPE requirements planned for this development project, including specific PPE details, planning, tracking/supervision, enforcement, and documentation, are outlined in the PPE SOP provided as **Appendix D**. The EP will be responsible for monitoring organic vapor concentrations in the worker breathing zone within the utility trenches and excavations to determine whether any increased level of health and safety protection (including engineering controls and/or PPE) is required.

Prior to commencing work, the contractor must conduct an on-site safety meeting for all personnel. All personnel must be made aware of the HASP and the PPE SOP. Detailed safety information shall be provided to personnel who may be exposed to COPCs. Workers will be responsible for following established safety procedures to prevent contact with potentially contaminated material.

### 5.4 INSTITUTIONAL CONTROLS (FUTURE LAND USE CONTROLS)

Long-term conditions related to future use of the Site will be placed on the RADWP approval, NFA, and COC. These conditions are anticipated to include the following:

- A restriction prohibiting the use of groundwater for any purpose at the Site and a requirement to characterize, containerize, and properly dispose of groundwater in the event of deep excavations encountering groundwater.
- Notice to the Agencies at least 30 days prior to any future soil disturbances that are expected to breach the approved capping remedy (i.e., through the pavement cap or marker fabric in landscaped areas).
- Notice to the USEPA at least 30 days prior to any future soil disturbances that are expected to breach the approved capping remedy, only if the proposed duration of ground intrusive activity would exceed the allowable exposure duration determined in the SLRA and the contractor will not use the modified Level D PPE specified in the approved SOP.
- Requirement for a HASP in the event of any future excavations at the Site.
- Complete appropriate characterization and disposal of any material excavated/pumped at the Site in accordance with applicable local, state, and federal requirements.
- Implementation of inspection procedures and maintenance of the containment remedies.

The owner/operator will file the above deed restrictions as defined by the MDE-VCP in the NFA and COC.

## 5.5 POST REMEDIATION REQUIREMENTS

Post remediation requirements will include compliance with the conditions specified in the NFA, COC, and the deed restrictions recorded for the Site. Deed restrictions will be recorded within 30 days after receipt of the final NFA. In addition, the Agencies will be provided with a written notice of any future excavations (as applicable) in accordance with the requirements given in Section 5.5. Written notice of planned excavation activities will include the proposed date(s) for the excavation, location of the excavation, health and safety protocols (as required), clean fill source (as required), and proposed characterization and disposal requirements. Written notice may consist of email correspondence and/or hard copy correspondence.

Additional requirements will include inspection procedures and maintenance of the containment remedies to minimize degradation which could lead to future exposures, as well as continued perimeter groundwater monitoring. An O&M Plan will be submitted for Agency approval and will include long-term inspection and maintenance requirements for the capped areas of the Site. The responsible party will perform cap inspections, perform maintenance of the cap, and retain inspection records, as required by the O&M Plan.

## 5.6 CONSTRUCTION OVERSIGHT

Construction Oversight by an EP will ensure and document that the project is built as designed and appropriate environmental and safety protocols are followed. Upon completion, the EP will certify that the project is constructed in accordance with this RADWP.

The EP will monitor all soil excavation and utility trenching activities for signs of contamination that may indicate materials that are not suitable for reuse. In particular, soils will be monitored with a hand-held PID for potential VOC impacts, and will also be visually inspected for staining, petroleum waste materials, or other indications of significant contamination. If screening of excavated materials by the EP indicates the presence of conditions of potential concern (i.e., sustained PID readings greater than 10 ppm, visual staining, unsuitable waste materials, etc.), such materials shall be segregated for additional sampling and special management (as described in Section 5.1.2; Soil Excavation and Utility Trenching). The EP will also perform routine periodic breathing zone monitoring and PPE spot checks during ground intrusive activities. The EP will also inspect any water that collects in the excavations/trenches on an as-needed basis to coordinate appropriate sampling prior to disposal (as described in Section 5.2.2; Dewatering).

Daily inspections, as necessary, will be performed during general site grading and cap construction activities to verify that appropriate fill materials are being used (as described in Section 5.1.4; Fill), dust monitoring and control measures are being implemented as appropriate (as described in Section 5.1.5; Dust Control), the requirements of the HASP and the PPE SOP are being enforced by the designated Site Safety Officer (as described in Section 5.4; Health and Safety), and surface engineering controls are being installed with the appropriate thicknesses (shown on the RADWP attachments). Oversight by an EP will not be required during construction activities which do not have a significant environmental component, such as above-grade construction.

Records will be developed by the EP to document:

- Compliance with soil screening requirements;
- Proper water management, including documentation of any testing and water disposal;
- Observations of construction activities during site grading and cap construction; and
- Proper cap thickness and construction.

## 6.0 PERMITS, NOTIFICATIONS AND CONTINGENCIES

The participant and their contractors will comply with all local, state, and federal laws and regulations by obtaining any necessary approvals and permits to conduct the activities contained herein. Any permits or permit modifications from State or local authorities will be provided as addenda to this RADWP.

A grading permit is required if the proposed grading disturbs over 5,000 square feet of surface area or over 100 cubic yards of earth. A grading permit is required for any grading activities in any watercourse, floodplain, wetland area, buffers (stream and within 100 feet of tidal water), habitat protection areas or forest buffer areas (includes forest conservation areas). Based on the scope of proposed earth disturbance, a grading permit will be required as part of this development project. Erosion and Sediment Control Plans will be submitted to, and approved by, the Agencies prior to initiation of land disturbance for development.

Contingency measures will include the following:

1. The Agencies will be notified immediately of any previously undiscovered contamination, previously undiscovered storage tanks and other oil-related issues, and citations from regulatory entities related to health and safety practices.
2. Any significant change to the implementation schedule will be noted in the progress reports to Agencies.
3. Modified Level D PPE will be used for the entire scope of ground intrusive work covered by this RADWP as a protective measure to ensure that there are no unacceptable exposures for Construction Workers during project implementation. The modified Level D PPE requirements which will be applied during this project are outlined in the PPE SOP provided as **Appendix D**. If it is not possible to implement the PPE SOP as provided, the agencies will be notified and a RADWP Addendum will be submitted to detail any appropriate mitigative measures.

## 7.0 IMPLEMENTATION SCHEDULE

Progress reports will be submitted to the Agencies on a quarterly basis. Each quarterly progress report will include, at a minimum, a discussion of the following information regarding tasks completed during the specified quarter:

- Development Progress
- Soil Management (imported materials, screening, stockpiling)
- Soil Sampling and Disposal
- Water Management
- Dust Monitoring
- Notable Occurrences (if applicable)
- Additional Associated Work (if applicable)

The proposed implementation schedule is shown below:

<b><u>Task</u></b>	<b><u>Proposed Completion Date</u></b>
Anticipated RADWP Approval	June 2023
<b><i>Development:</i></b>	
Installation of Erosion and Sediment Controls	Complete
Slag (or Alternative Fill) Delivery and Placement	Complete
Site Preparation / Grading	Complete
Utility Installations	July 2023 (start)
Submittal of Development Completion Report/ Notice of Completion of Remedial Actions*	March 2024
Request for NFA from the Agencies	March 2024
Recordation of institutional controls in the land records office of Baltimore County	Within 30 days of receiving the approval of NFA from the Agencies

Submit proof of recordation with  
Baltimore County

Upon receipt from Baltimore County

\*Notice of Completion of Remedial Actions will be prepared by Professional Engineer registered in Maryland and submitted with the Development Completion Report to certify that the work is consistent with the requirements of this RADWP and the Site is suitable for occupancy and use.



---

---

## **FIGURES**

---

---



**LEGEND**

- B7-2 Site Boundary
- Site Boundary
- Parcel Boundaries
- Private Property



**Tradepoint Atlantic  
Area A and Area B Parcels**


April 7, 2023

**Figure**

**1**



**ARM Group LLC**  
Engineers and Scientists



Tradepoint Atlantic





Sparrows Point


Baltimore County, MD

Area A: Project 210101  
Area B: Project 210102




**LEGEND**


-  Proposed Building
-  B7-2 Site Boundary
-  External Construction Worker Area
-  Parcel Boundary

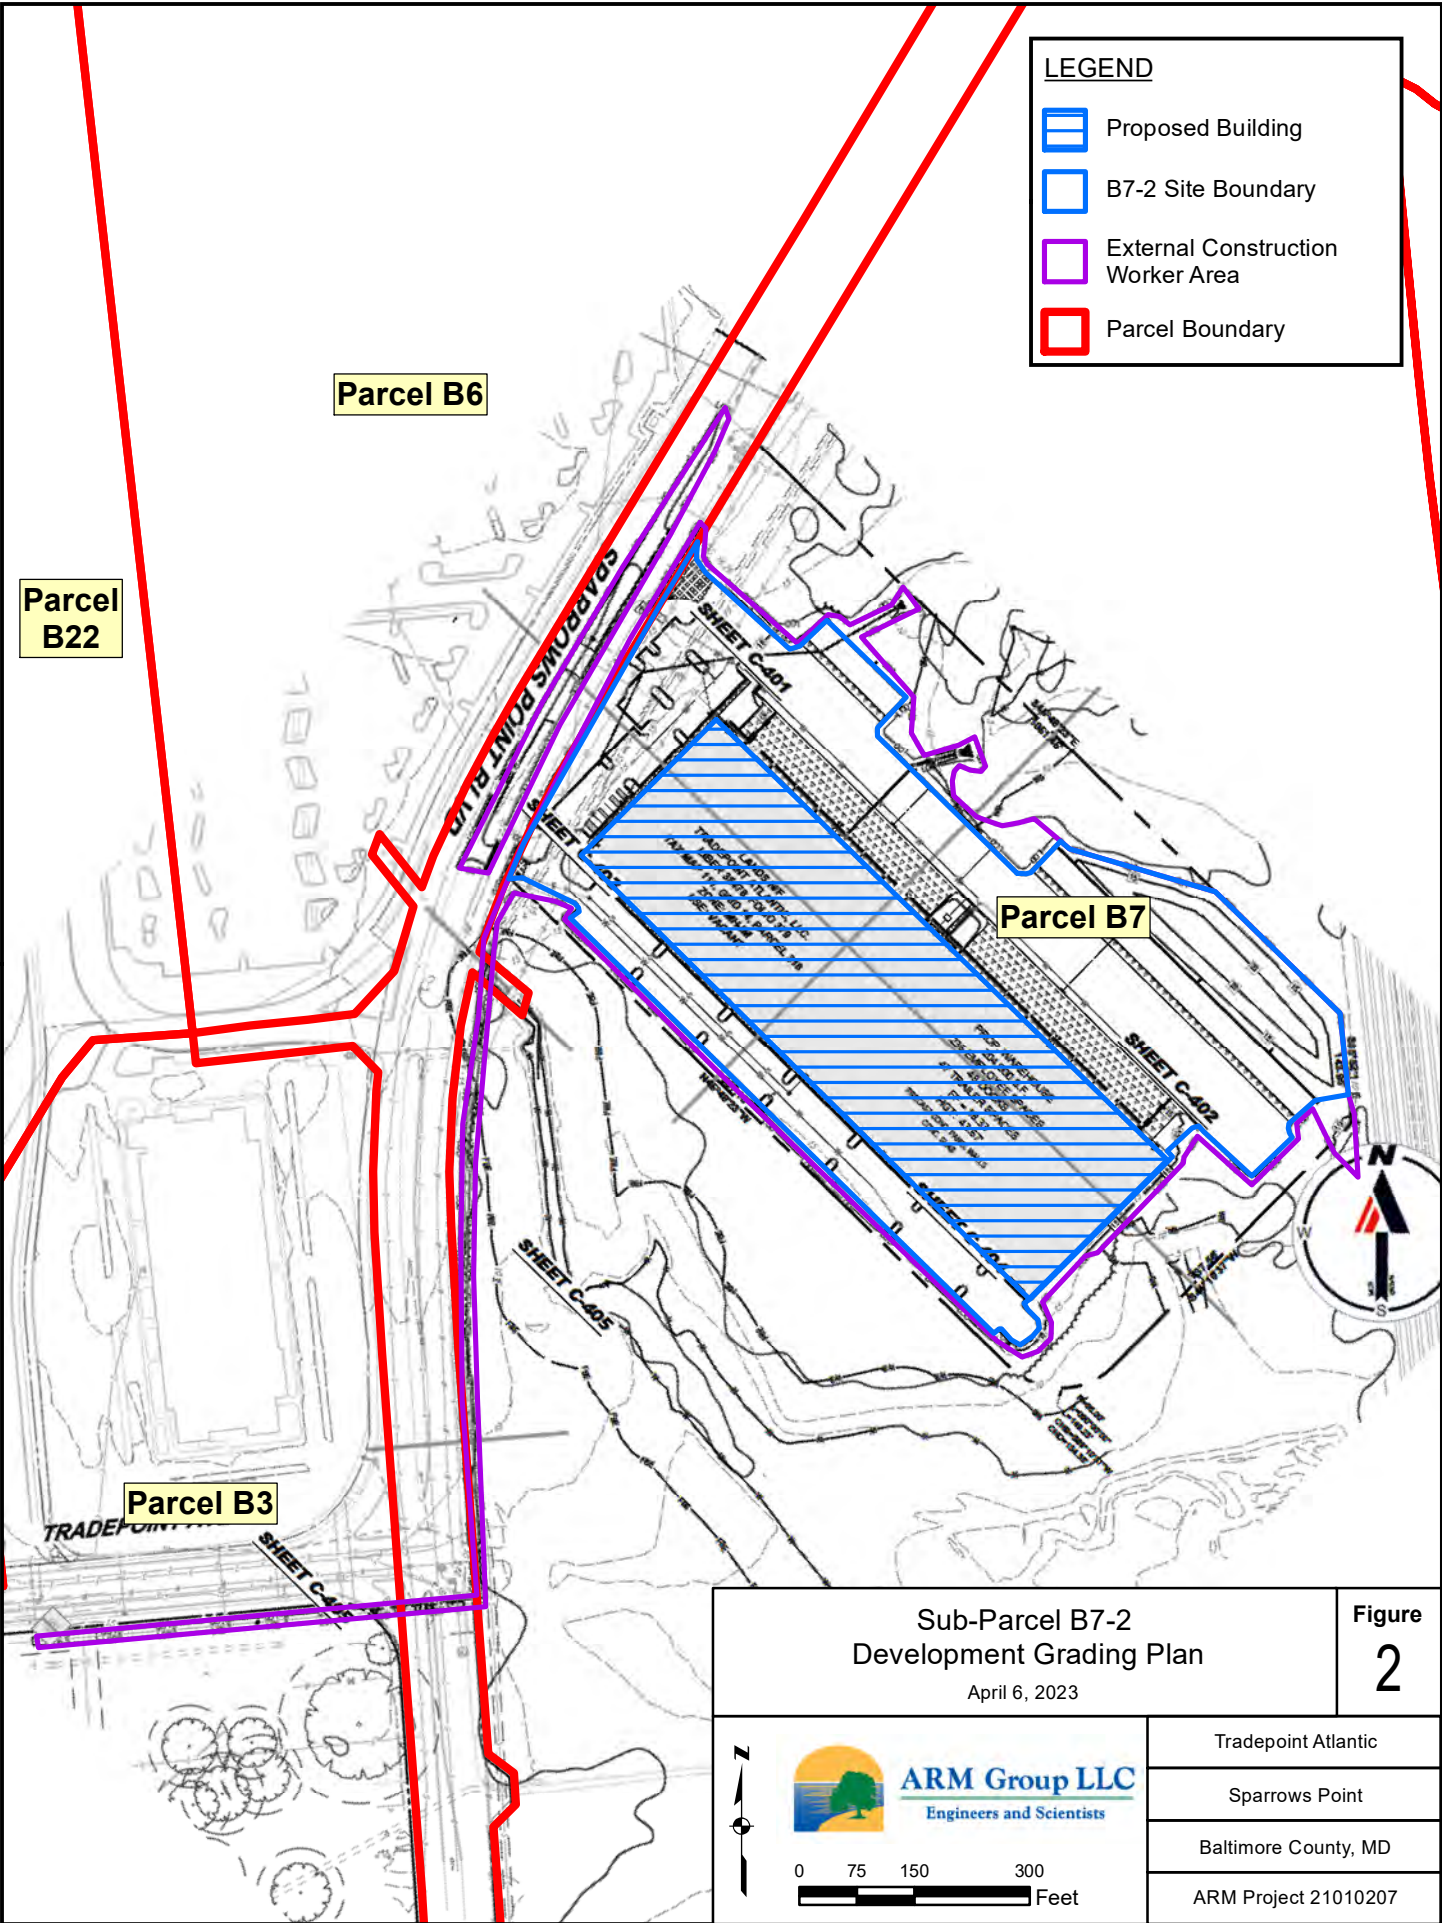


**Sub-Parcel B7-2  
Development Grading Plan**  
April 6, 2023

**Figure  
2**






**ARM Group LLC**  
Engineers and Scientists







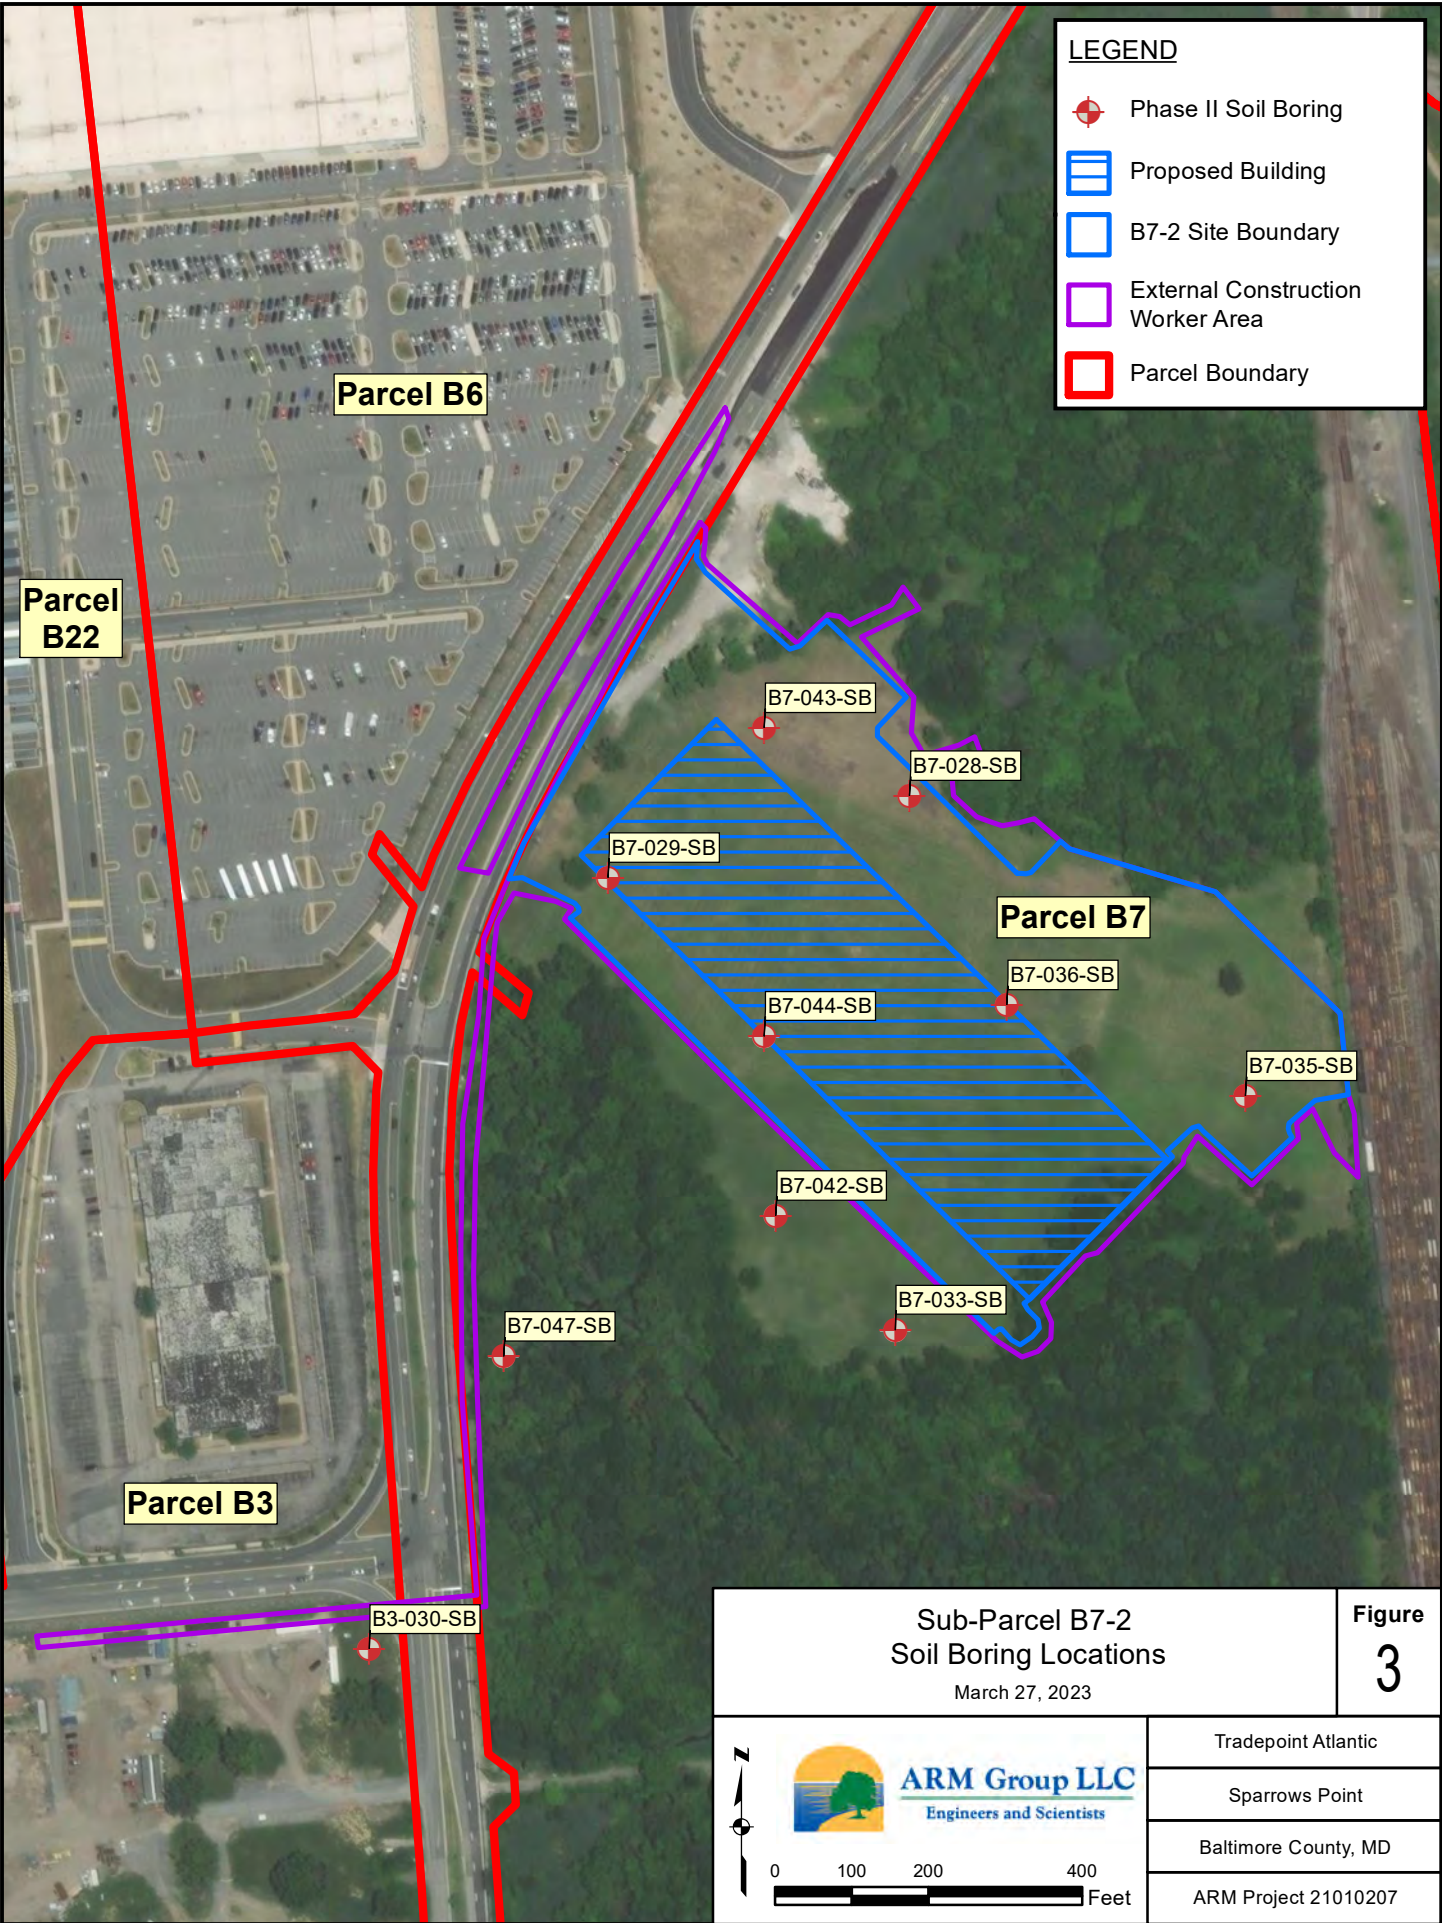



Tradepoint Atlantic
Sparrows Point
Baltimore County, MD
ARM Project 21010207






**LEGEND**






-  Phase II Soil Boring
-  Proposed Building
-  B7-2 Site Boundary
-  External Construction Worker Area
-  Parcel Boundary
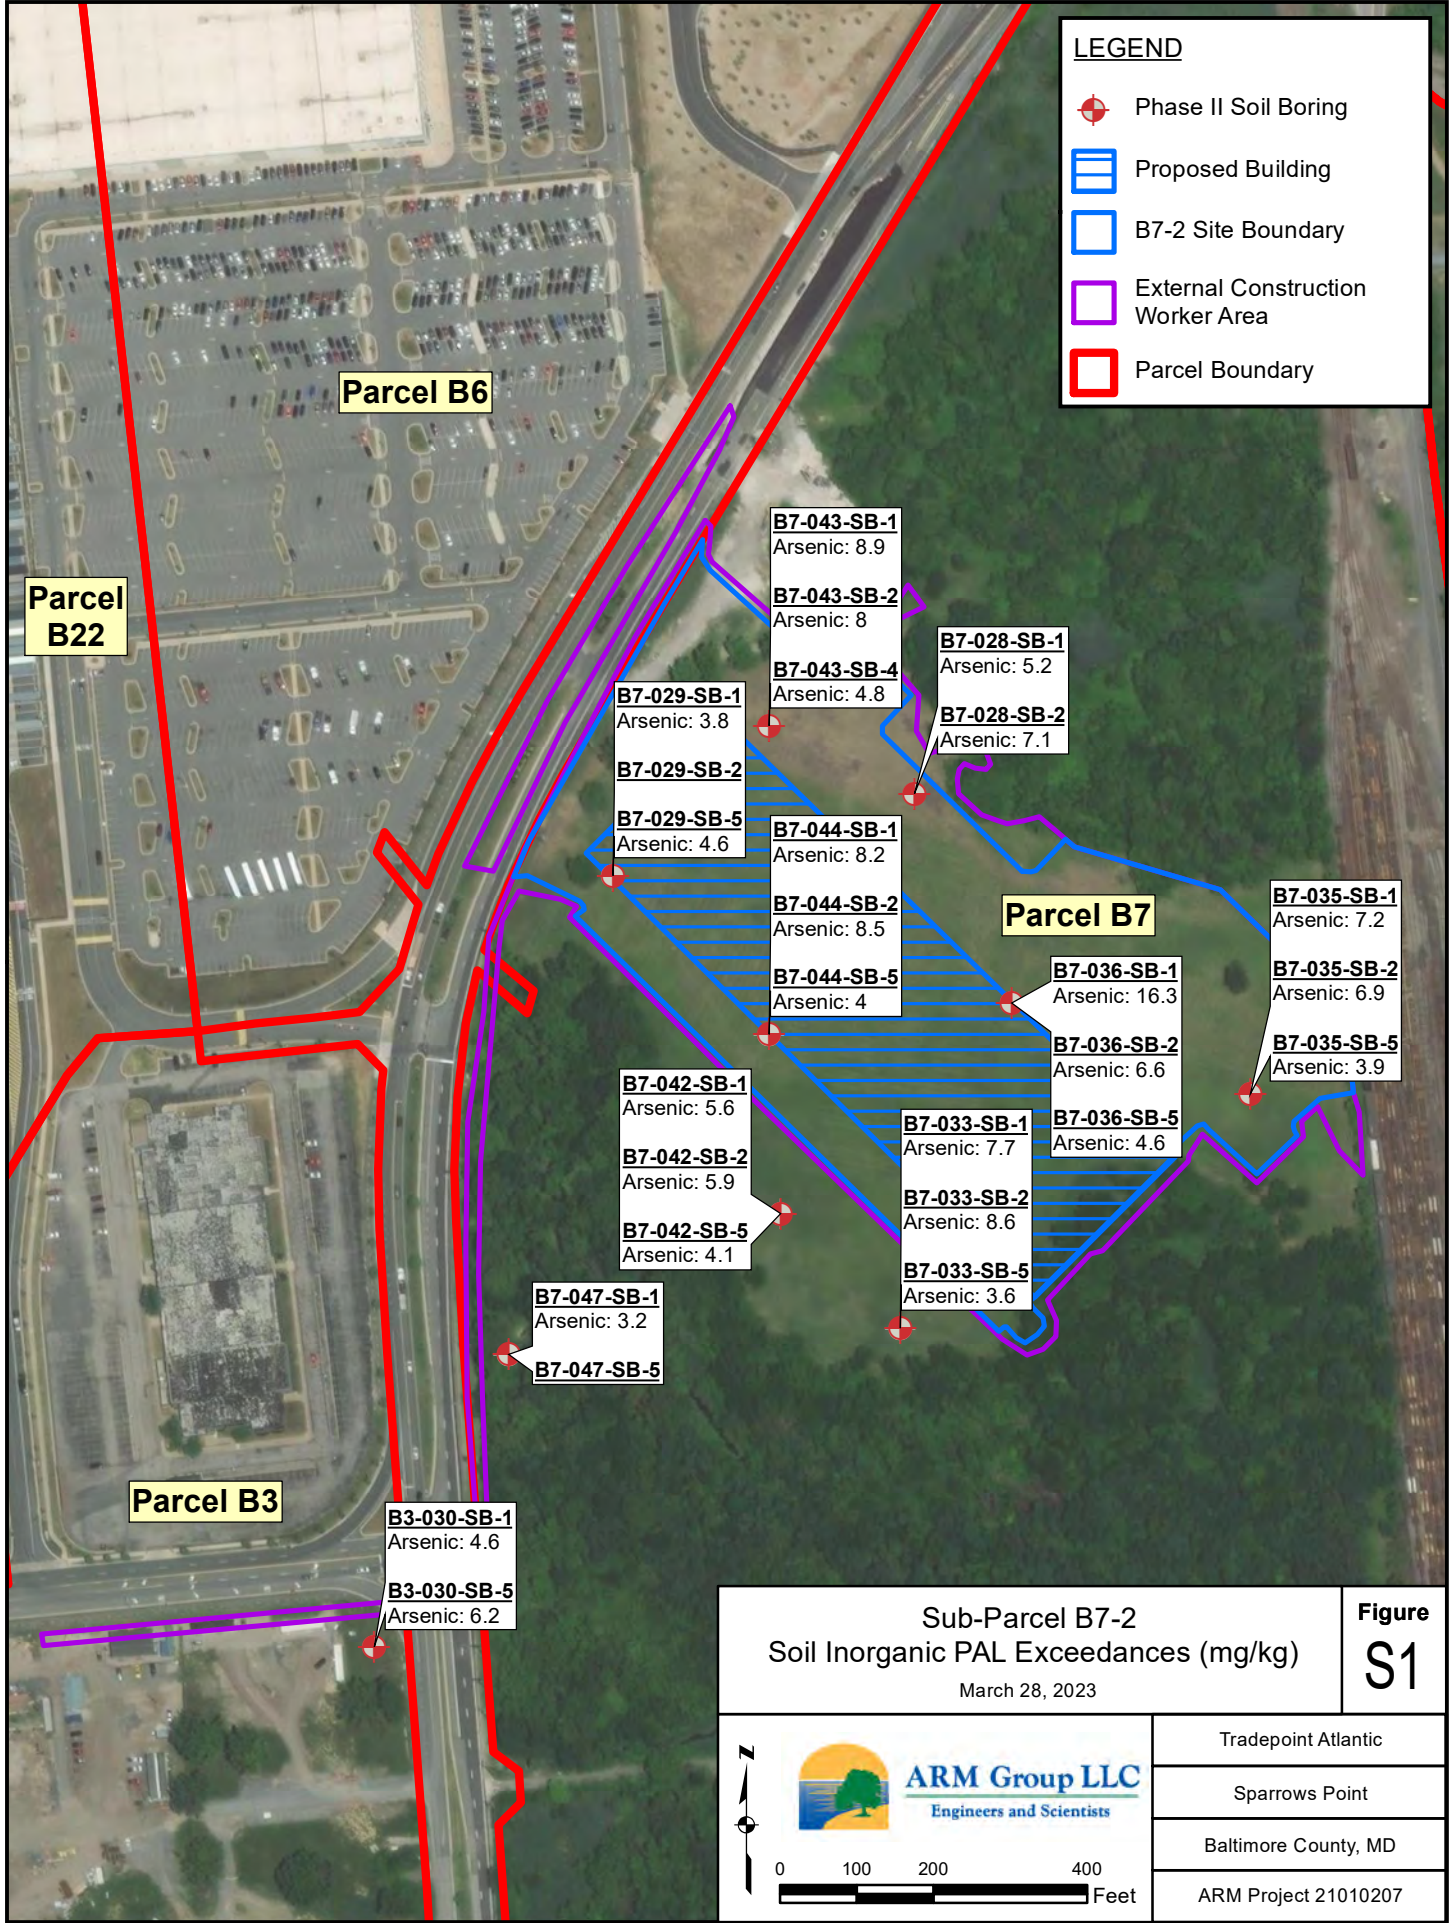
<b>Sub-Parcel B7-2 Soil Boring Locations</b> March 27, 2023		<b>Figure 3</b>
 	 <b>ARM Group LLC</b> Engineers and Scientists	
	Tradepoint Atlantic	
	Sparrows Point	
	Baltimore County, MD ARM Project 21010207	





**LEGEND**

-  Phase II Soil Boring
-  Proposed Building
-  B7-2 Site Boundary
-  External Construction Worker Area
-  Parcel Boundary

**Parcel B6**

**Parcel B22**

**Parcel B3**

**Parcel B7**

**B7-043-SB-1**  
Arsenic: 8.9

**B7-043-SB-2**  
Arsenic: 8

**B7-043-SB-4**  
Arsenic: 4.8

**B7-028-SB-1**  
Arsenic: 5.2

**B7-028-SB-2**  
Arsenic: 7.1

**B7-029-SB-1**  
Arsenic: 3.8

**B7-029-SB-2**

**B7-029-SB-5**  
Arsenic: 4.6

**B7-044-SB-1**  
Arsenic: 8.2

**B7-044-SB-2**  
Arsenic: 8.5

**B7-044-SB-5**  
Arsenic: 4

**B7-035-SB-1**  
Arsenic: 7.2

**B7-035-SB-2**  
Arsenic: 6.9

**B7-035-SB-5**  
Arsenic: 3.9

**B7-036-SB-1**  
Arsenic: 16.3

**B7-036-SB-2**  
Arsenic: 6.6

**B7-036-SB-5**  
Arsenic: 4.6

**B7-042-SB-1**  
Arsenic: 5.6

**B7-042-SB-2**  
Arsenic: 5.9

**B7-042-SB-5**  
Arsenic: 4.1

**B7-033-SB-1**  
Arsenic: 7.7

**B7-033-SB-2**  
Arsenic: 8.6

**B7-033-SB-5**  
Arsenic: 3.6

**B7-047-SB-1**  
Arsenic: 3.2

**B7-047-SB-5**

**B3-030-SB-1**  
Arsenic: 4.6

**B3-030-SB-5**  
Arsenic: 6.2

**Sub-Parcel B7-2**  
**Soil Inorganic PAL Exceedances (mg/kg)**

March 28, 2023

**Figure**  
**S1**



**ARM Group LLC**  
Engineers and Scientists

0 100 200 400 Feet


Tradepoint Atlantic

Sparrows Point

Baltimore County, MD

ARM Project 21010207



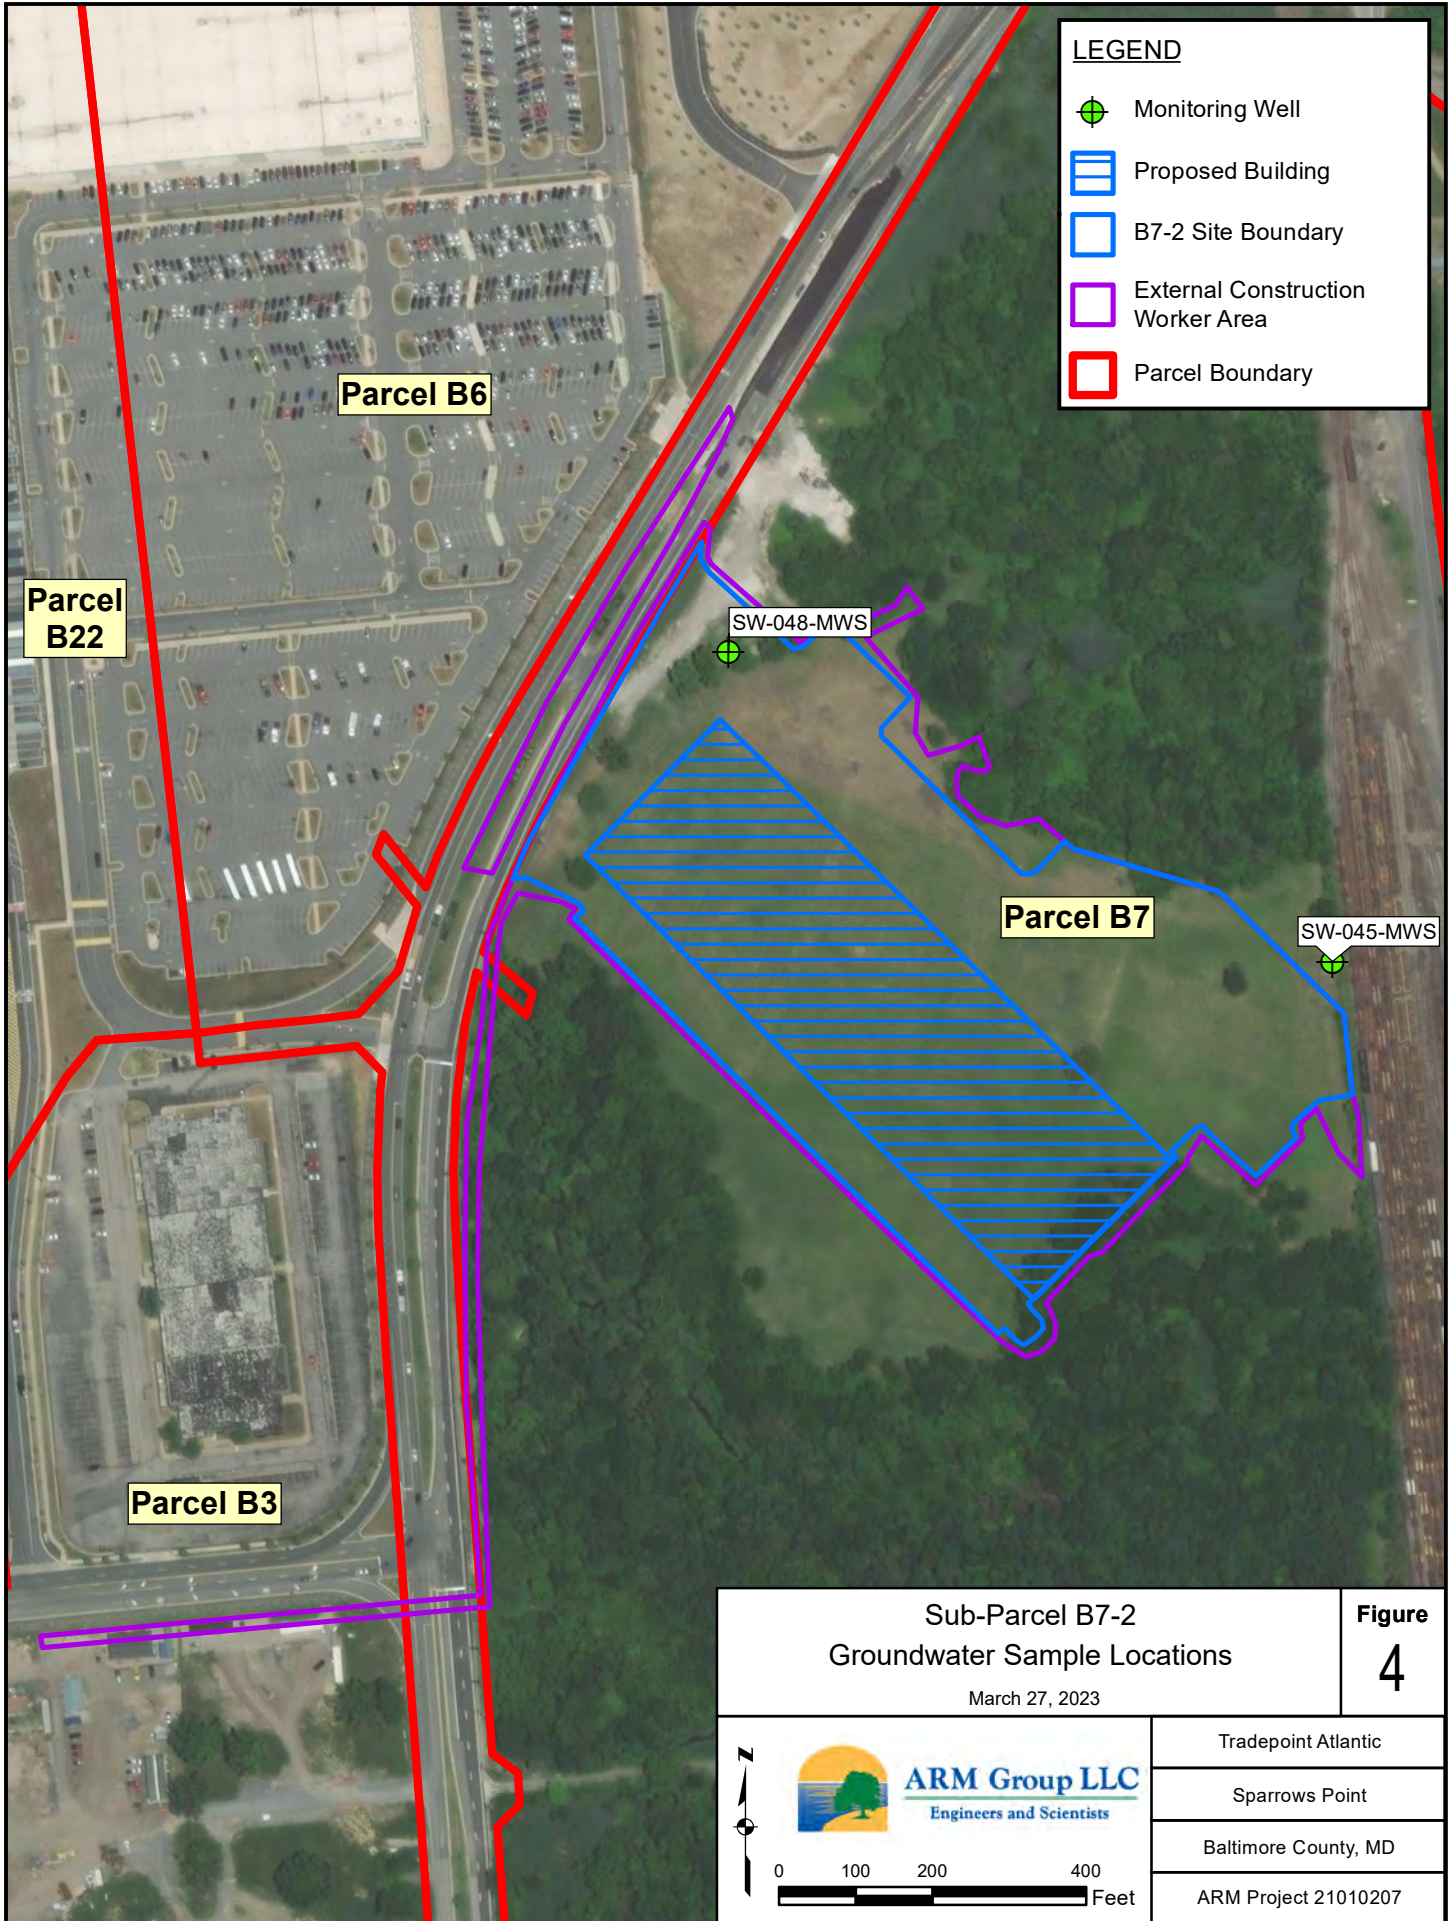

**LEGEND**

- Monitoring Well
- Proposed Building
- B7-2 Site Boundary
- External Construction Worker Area
- Parcel Boundary

**Parcel B22**

**Parcel B6**

SW-048-MWS

**Parcel B7**

SW-045-MWS

**Parcel B3**

**Sub-Parcel B7-2  
Groundwater Sample Locations**

March 27, 2023

**Figure  
4**



**ARM Group LLC**  
Engineers and Scientists




Tradepoint Atlantic

Sparrows Point

Baltimore County, MD

ARM Project 21010207



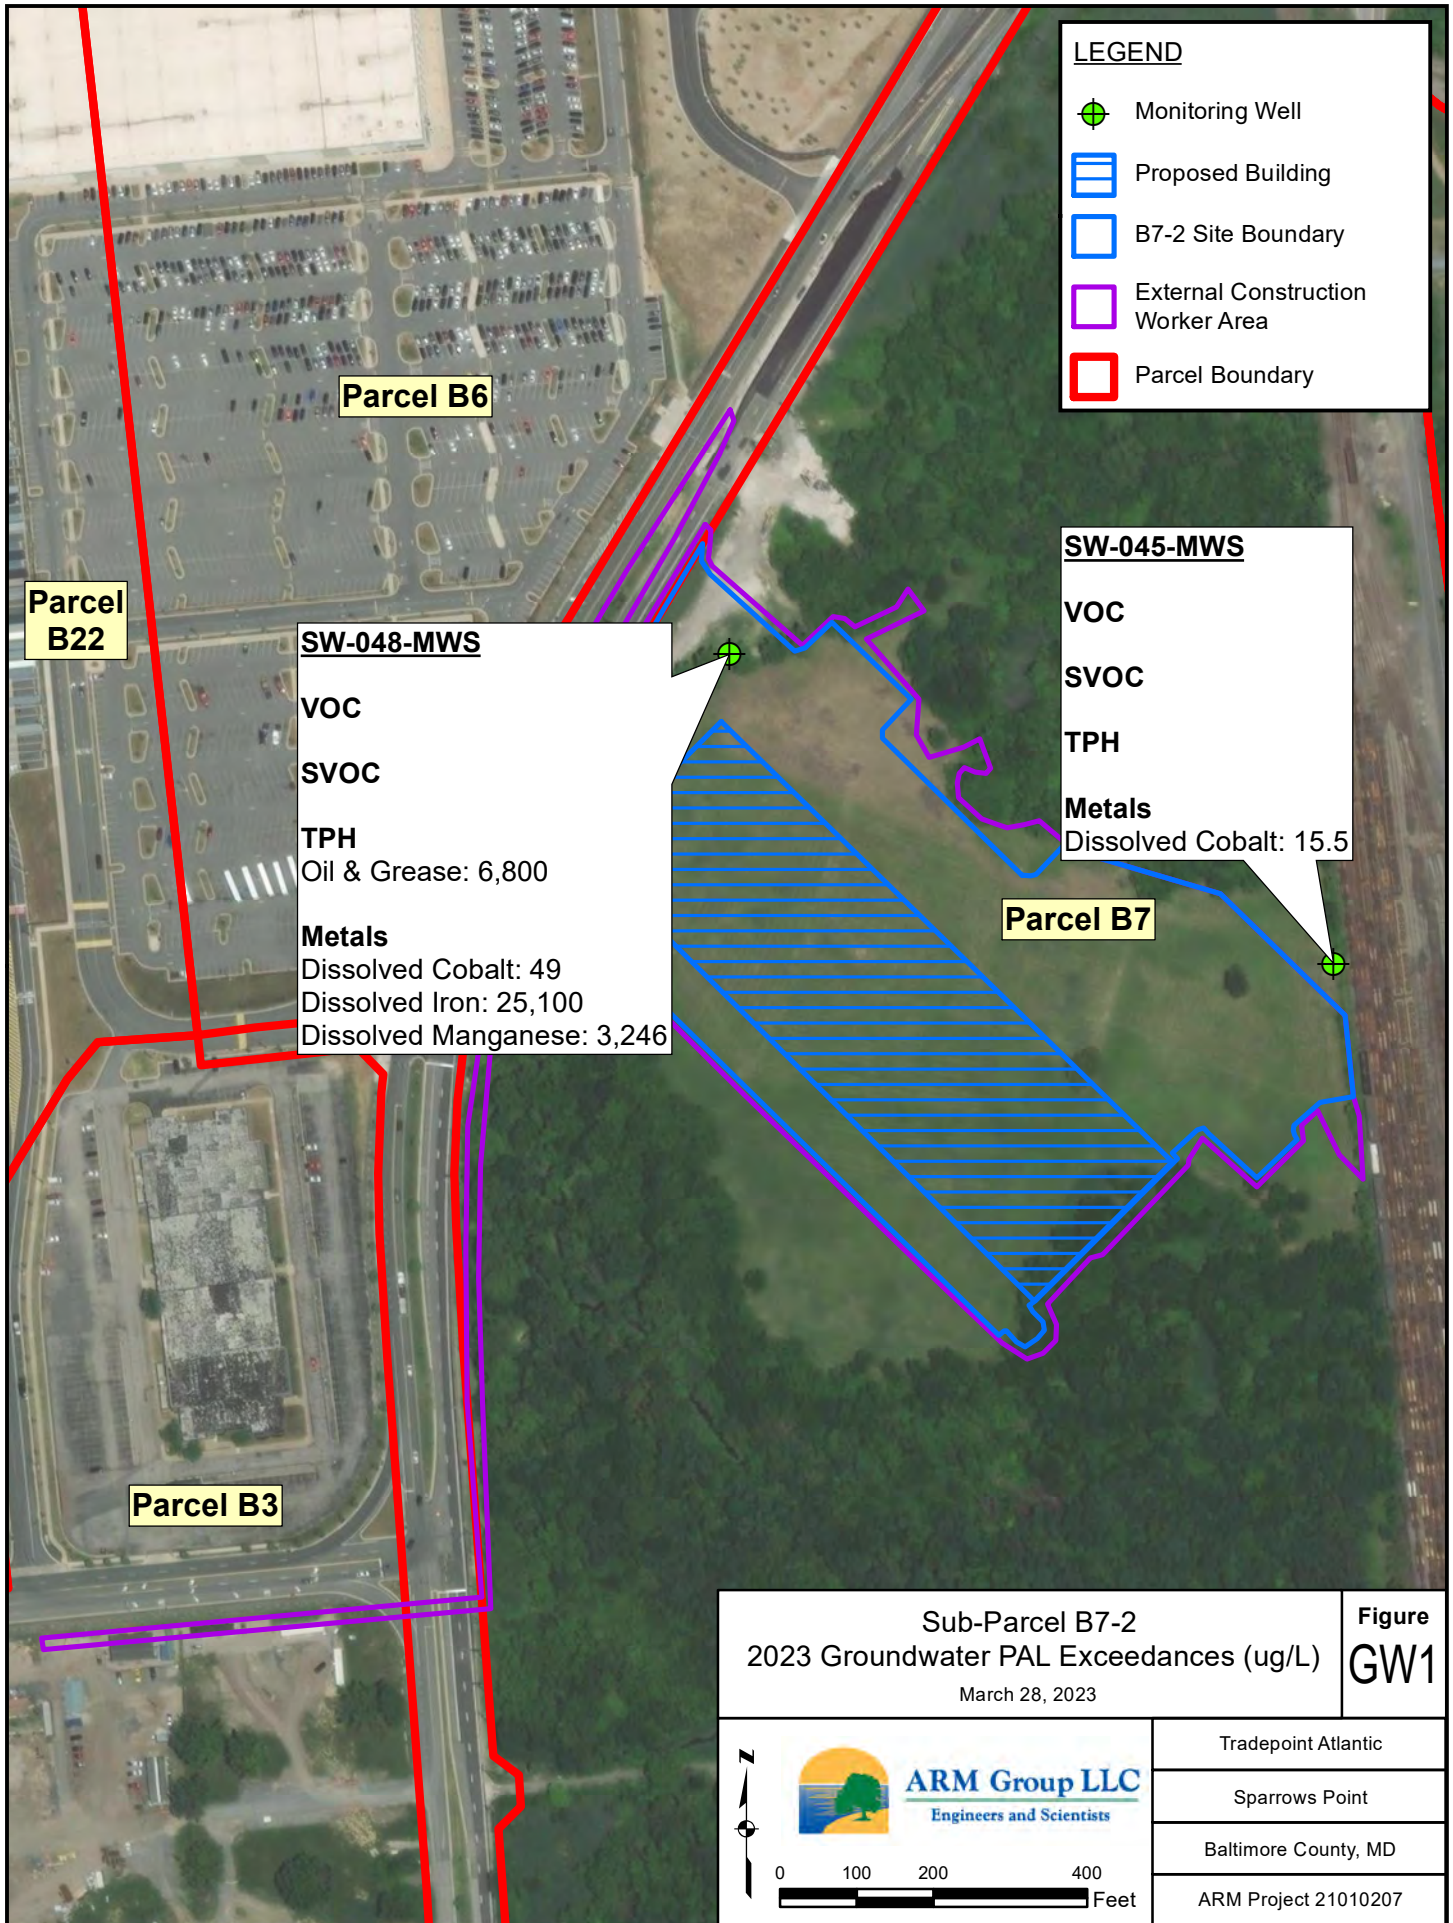

**LEGEND**

- Monitoring Well
- Proposed Building
- B7-2 Site Boundary
- External Construction Worker Area
- Parcel Boundary

**SW-048-MWS**

VOC

SVOC

TPH

Oil & Grease: 6,800

**Metals**

Dissolved Cobalt: 49

Dissolved Iron: 25,100

Dissolved Manganese: 3,246

**SW-045-MWS**

VOC

SVOC

TPH

**Metals**

Dissolved Cobalt: 15.5

**Sub-Parcel B7-2**  
**2023 Groundwater PAL Exceedances (ug/L)**  
 March 28, 2023

**Figure**  
**GW1**


**ARM Group LLC**  
Engineers and Scientists

0    100    200    400



Feet

Tradepoint Atlantic
Sparrows Point
Baltimore County, MD
ARM Project 21010207

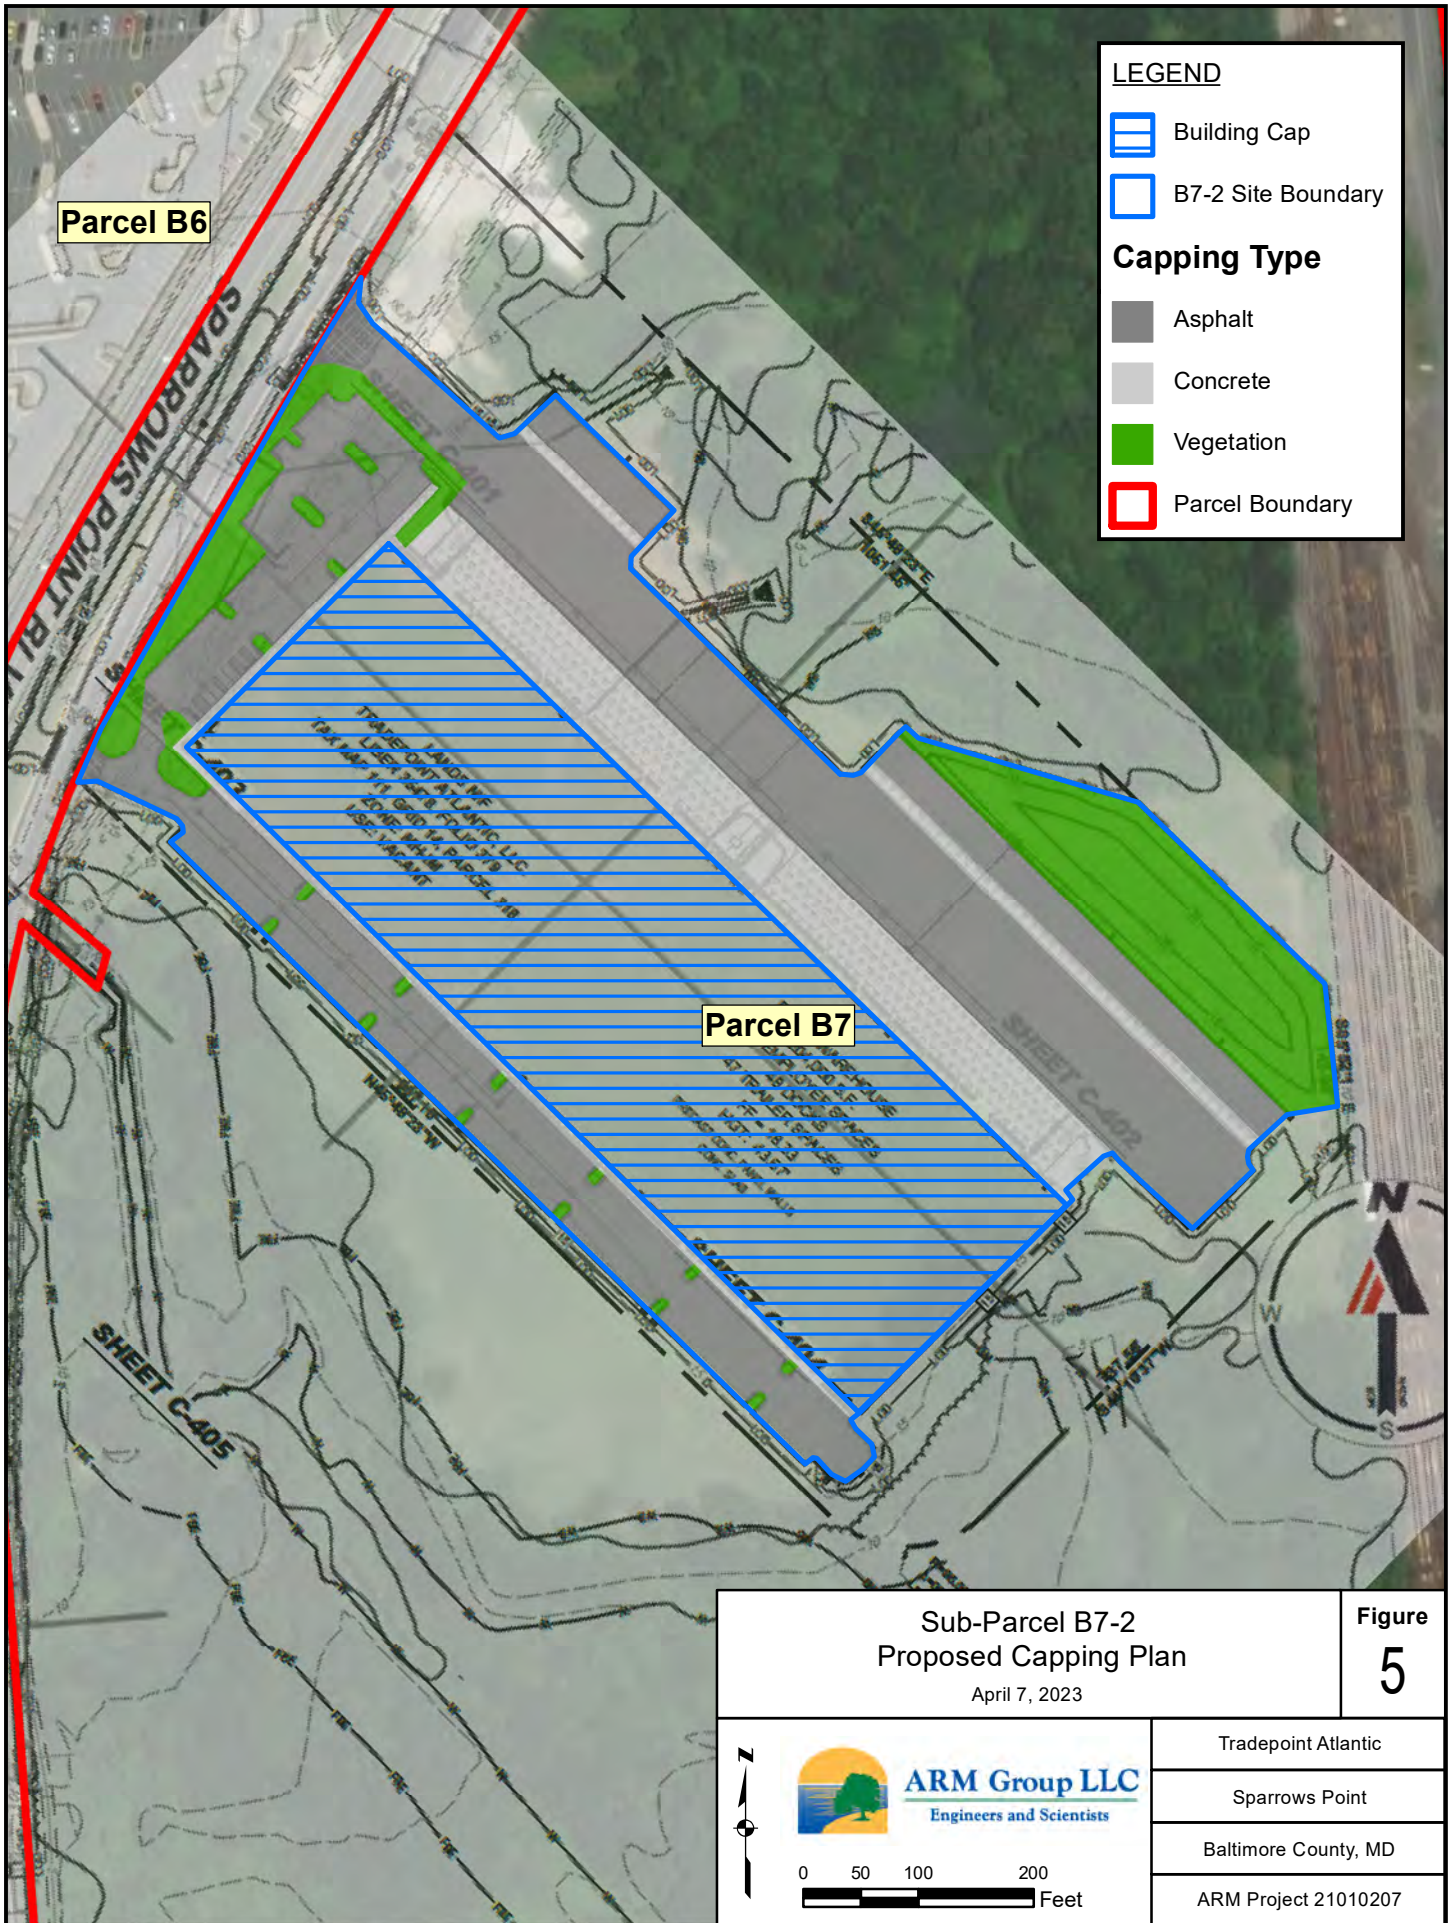







**LEGEND**

-  Building Cap
-  B7-2 Site Boundary

**Capping Type**

-  Asphalt
-  Concrete
-  Vegetation
-  Parcel Boundary

**Parcel B7**

**Parcel B6**

Sub-Parcel B7-2  
Proposed Capping Plan  
April 7, 2023


Figure  
**5**



**ARM Group LLC**  
Engineers and Scientists

0 50 100 200  
Feet

Tradepoint Atlantic
Sparrows Point
Baltimore County, MD
ARM Project 21010207

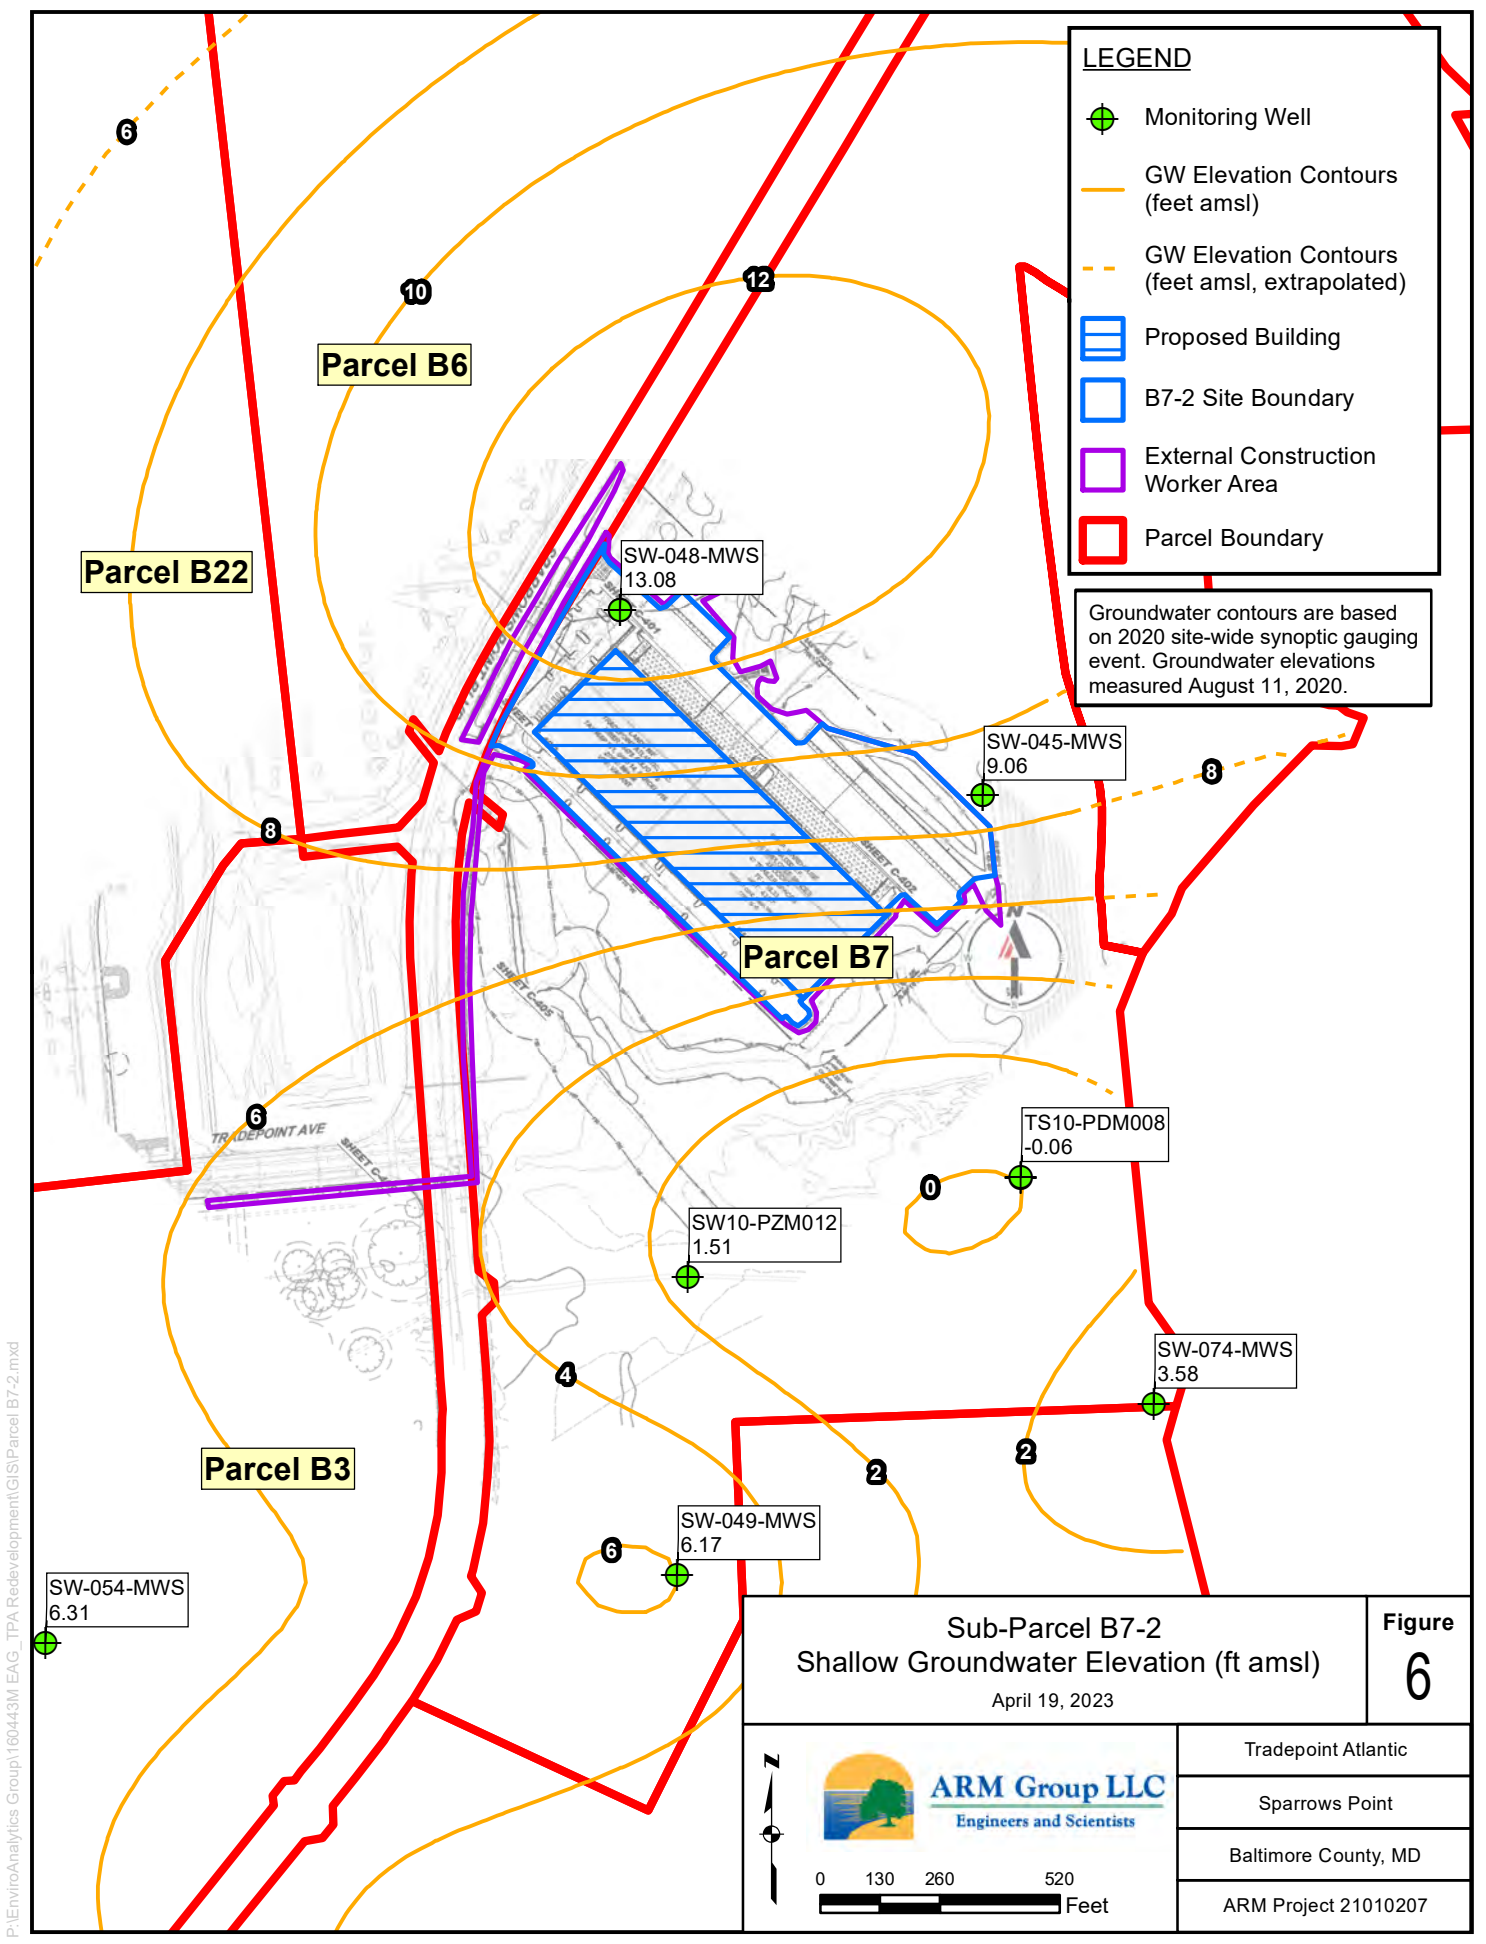

P:\EnviroAnalytics Group\160443M EAG\_TPA Redevelopment\GIS\Parcel B7-2.mxd

---

---

## **TABLES**

---

---



**Table 1 - Sub-Parcel B7-2  
Summary of Organics Detected in Soil**

Parameter	Units	PAL	B3-030-SB-1*	B3-030-SB-5*	B7-028-SB-1	B7-028-SB-2	B7-029-SB-1*	B7-029-SB-2*	B7-029-SB-5*	B7-033-SB-1	B7-033-SB-2	B7-033-SB-5	B7-035-SB-1*	B7-035-SB-2*	B7-035-SB-5*
			5/23/2017	5/23/2017	10/4/2018	10/4/2018	10/5/2018	10/5/2018	10/5/2018	10/4/2018	10/4/2018	10/4/2018	10/5/2018	10/5/2018	10/5/2018
<b>Semi-Volatile Organic Compounds<sup>^</sup></b>															
2-Methylnaphthalene	mg/kg	3,000	<b>0.042 J</b>	0.0078 U	<b>0.0079</b>	0.0079 U	<b>0.0039 J</b>	0.008 U	0.008 U	<b>0.0045 J</b>	<b>0.018</b>	0.0077 U	<b>0.0087 J</b>	<b>0.0024 J</b>	0.0079 U
Acenaphthene	mg/kg	45,000	<b>0.019 J</b>	0.0078 U	<b>0.001 J</b>	0.0079 U	0.0086 U	0.008 U	0.008 U	0.008 U	<b>0.004 J</b>	0.0077 U	<b>0.0016 J</b>	0.008 U	0.0079 U
Acenaphthylene	mg/kg	45,000	<b>0.011 J</b>	0.0078 U	<b>0.002 J</b>	0.0079 U	0.0086 U	0.008 U	0.008 U	<b>0.0036 J</b>	<b>0.057</b>	0.0077 U	<b>0.0021 J</b>	<b>0.001 J</b>	0.0079 U
Acetophenone	mg/kg	120,000	<b>0.043 J</b>	0.076 U	0.073 U	0.077 U	0.086 U	0.081 U	0.079 U	0.08 U	0.79 U	0.077 U	0.086 U	0.078 U	0.08 U
Anthracene	mg/kg	230,000	<b>0.034 J</b>	0.0078 U	<b>0.0023 J</b>	0.0079 U	<b>0.0022 J</b>	0.008 U	0.008 U	<b>0.0035 J</b>	<b>0.04</b>	<b>0.00092 J</b>	<b>0.0037 J</b>	<b>0.0022 J</b>	0.0079 U
Benz[a]anthracene	mg/kg	21	<b>0.24</b>	0.0078 U	<b>0.012</b>	0.0079 U	<b>0.014</b>	<b>0.0013 J</b>	0.008 U	<b>0.025</b>	<b>0.22</b>	<b>0.0038 J</b>	<b>0.024</b>	<b>0.012</b>	0.0079 U
Benzaldehyde	mg/kg	120,000	<b>0.074 J</b>	0.076 U	0.073 U	0.077 U	0.086 U	0.081 U	0.079 U	0.08 U	0.79 U	0.077 U	0.086 U	0.078 U	0.08 U
Benzo[a]pyrene	mg/kg	2.1	<b>0.23</b>	0.0078 U	<b>0.017</b>	0.0079 U	<b>0.014</b>	<b>0.0008 J</b>	0.008 U	<b>0.026</b>	<b>0.24</b>	<b>0.0031 J</b>	<b>0.024</b>	<b>0.01</b>	0.0079 U
Benzo[b]fluoranthene	mg/kg	21	<b>0.39</b>	0.0078 U	<b>0.04</b>	0.0079 U	<b>0.019</b>	<b>0.0013 J</b>	0.008 U	<b>0.051</b>	<b>0.47</b>	<b>0.0062 J</b>	<b>0.037</b>	<b>0.016</b>	0.0079 U
Benzo[g,h,i]perylene	mg/kg		<b>0.15</b>	0.0078 U	<b>0.014</b>	0.0079 U	<b>0.0086 J</b>	0.008 U	0.008 U	<b>0.015</b>	<b>0.12</b>	<b>0.002 J</b>	<b>0.017</b>	<b>0.0064 J</b>	0.0079 U
Benzo[k]fluoranthene	mg/kg	210	<b>0.14</b>	0.0078 U	<b>0.035</b>	0.0079 U	<b>0.0082 J</b>	0.008 U	0.008 U	<b>0.045</b>	<b>0.41</b>	<b>0.0055 J</b>	<b>0.013</b>	<b>0.0055 J</b>	0.0079 U
bis(2-Ethylhexyl)phthalate	mg/kg	160	<b>0.15</b>	0.076 U	0.073 U	0.077 U	0.086 U	0.081 U	0.079 U	0.08 U	0.79 U	0.077 U	0.086 U	0.078 U	0.08 U
Carbazole	mg/kg		<b>0.046 J</b>	0.076 U	0.073 U	0.077 U	0.086 U	0.081 U	0.079 U	0.08 U	0.79 U	0.077 U	0.086 U	0.078 U	0.08 U
Chrysene	mg/kg	2,100	<b>0.29</b>	0.0078 U	<b>0.019</b>	0.0079 U	<b>0.015</b>	<b>0.00051 J</b>	0.008 U	<b>0.027</b>	<b>0.21</b>	<b>0.0038 J</b>	<b>0.027</b>	<b>0.012</b>	0.0079 U
Dibenz[a,h]anthracene	mg/kg	2.1	<b>0.045 J</b>	0.0078 U	<b>0.0046 J</b>	0.0079 U	<b>0.0026 J</b>	0.008 U	0.008 U	<b>0.0054 J</b>	<b>0.043</b>	0.0077 U	<b>0.0052 J</b>	<b>0.002 J</b>	0.0079 U
Diethylphthalate	mg/kg	660,000	<b>0.02 J</b>	0.076 U	0.073 U	0.077 U	0.086 U	0.081 U	0.079 U	0.08 U	0.79 U	0.077 U	0.086 U	0.078 U	0.08 U
Di-n-butylphthalate	mg/kg	82,000	0.067 B	0.043 B	0.073 U	0.077 U	0.086 U	0.081 U	0.079 U	0.08 U	0.79 U	0.077 U	0.086 U	0.078 U	0.08 U
Di-n-octylphthalate	mg/kg	8,200	<b>0.077 J</b>	0.076 U	0.073 U	0.077 U	0.086 U	0.081 U	0.079 U	0.08 U	0.79 U	0.077 U	0.086 U	0.078 U	0.08 U
Fluoranthene	mg/kg	30,000	<b>0.45</b>	0.0078 U	<b>0.023</b>	0.0079 U	<b>0.024</b>	<b>0.00078 J</b>	0.008 U	<b>0.042</b>	<b>0.38</b>	<b>0.0061 J</b>	<b>0.045</b>	<b>0.021</b>	0.0079 U
Fluorene	mg/kg	30,000	<b>0.014 J</b>	0.0078 U	<b>0.0012 J</b>	0.0079 U	0.0086 U	0.008 U	0.008 U	0.008 U	<b>0.01</b>	0.0077 U	<b>0.0015 J</b>	0.008 U	0.0079 U
Indeno[1,2,3-c,d]pyrene	mg/kg	21	<b>0.13</b>	0.0078 U	<b>0.012</b>	0.0079 U	<b>0.0074 J</b>	0.008 U	0.008 U	<b>0.015</b>	<b>0.13</b>	<b>0.0019 J</b>	<b>0.016</b>	<b>0.006 J</b>	0.0079 U
Naphthalene	mg/kg	8.6	<b>0.036 J</b>	0.0078 U	<b>0.008 J</b>	0.0079 U	<b>0.0046 J</b>	0.008 U	0.008 U	<b>0.0049 J</b>	<b>0.073 J</b>	<b>0.0016 J</b>	<b>0.0098</b>	<b>0.0028 J</b>	0.0079 U
Phenanthrene	mg/kg		<b>0.23</b>	0.0078 U	<b>0.015</b>	0.0079 U	<b>0.012</b>	0.008 U	0.008 U	<b>0.02</b>	<b>0.12</b>	<b>0.0052 J</b>	<b>0.02</b>	<b>0.01</b>	0.0079 U
Pyrene	mg/kg	23,000	<b>0.34</b>	0.0078 U	<b>0.02</b>	0.0079 U	<b>0.022</b>	0.008 U	0.008 U	<b>0.037</b>	<b>0.34</b>	<b>0.0053 J</b>	<b>0.039</b>	<b>0.018</b>	0.0079 U
<b>PCBs</b>															
Aroclor 1260	mg/kg	0.99	<b>0.029</b>	N/A	0.019 U	N/A	0.022 U	N/A	N/A	0.02 U	N/A	N/A	0.022 U	N/A	N/A
Aroclor 1268	mg/kg		0.02 U	N/A	0.019 UJ	N/A	0.022 U	N/A	N/A	0.02 UJ	N/A	N/A	<b>0.01 J</b>	N/A	N/A
PCBs (total)	mg/kg	0.97	0.14 U	N/A	0.17 U	N/A	0.19 U	N/A	N/A	0.18 U	N/A	N/A	0.2 U	N/A	N/A
<b>TPH/Oil &amp; Grease</b>															
Diesel Range Organics	mg/kg	6,200	<b>28.2</b>	2.4 B	<b>28.1 J</b>	7.9 UJ	<b>6.6 J</b>	8.2 U	8 U	<b>18.1 J</b>	<b>31.4 J</b>	<b>11.3 J</b>	<b>14.4</b>	<b>5.7 J</b>	7.9 U
Oil & Grease	mg/kg	6,200	<b>1,130</b>	<b>170</b>	<b>600</b>	<b>382</b>	<b>534</b>	<b>475</b>	<b>434</b>	<b>425</b>	<b>621</b>	<b>444</b>	<b>464</b>	<b>420</b>	<b>470</b>
<b>Pesticides</b>															
4,4'-DDD	mg/kg		N/A	N/A	0.0037 U	0.004 U	0.0043 U	0.0041 U	N/A	0.004 U	0.004 U	N/A	0.0044 U	0.004 U	N/A
4,4'-DDE	mg/kg		N/A	N/A	0.0037 U	0.004 U	0.0043 U	0.0041 U	N/A	0.004 U	0.004 U	N/A	0.0044 U	0.004 U	N/A
4,4'-DDT	mg/kg		N/A	N/A	0.0037 UJ	0.004 UJ	0.0043 U	0.0041 U	N/A	0.004 UJ	0.0021 U	N/A	0.0044 U	0.004 U	N/A
Aldrin	mg/kg		N/A	N/A	0.0019 U	0.002 U	0.0022 U	0.002 U	N/A	0.002 U	0.002 U	N/A	0.0022 U	0.002 U	N/A
alpha-Chlordane	mg/kg		N/A	N/A	<b>0.00036 J</b>	0.002 UJ	<b>0.0031</b>	0.002 U	N/A	<b>0.00048 J</b>	<b>0.00028 J</b>	N/A	<b>0.0021 J</b>	0.002 U	N/A
Dieldrin	mg/kg		N/A	N/A	0.0037 U	0.004 U	0.0043 U	0.0041 U	N/A	0.004 U	0.004 U	N/A	0.0044 U	0.004 U	N/A
Endosulfan I	mg/kg		N/A	N/A	0.0019 U	0.002 U	0.0022 U	0.002 U	N/A	0.002 U	0.002 U	N/A	0.0022 U	0.002 U	N/A
Endosulfan II	mg/kg		N/A	N/A	0.0037 U	0.004 U	0.0043 U	0.0041 U	N/A	0.004 U	<b>0.00099 J</b>	N/A	0.0044 U	0.004 U	N/A
Endrin	mg/kg		N/A	N/A	0.0037 U	0.004 U	<b>0.0011 J</b>	0.0041 U	N/A	0.004 U	<b>0.0021 J</b>	N/A	0.0044 U	0.004 U	N/A
Endrin aldehyde	mg/kg		N/A	N/A	0.0037 U	0.004 U	0.0043 U	0.0041 U	N/A	0.004 U	0.004 U	N/A	0.0044 U	<b>0.0019 J</b>	N/A
Endrine ketone	mg/kg		N/A	N/A	0.0037 UJ	0.004 UJ	0.0043 U	0.0041 U	N/A	0.0017 U	0.0028 U	N/A	<b>0.0031 J</b>	0.004 U	N/A
gamma-Chlordane	mg/kg		N/A	N/A	0.0019 U	0.002 U	<b>0.0021 J</b>	0.002 U	N/A	0.002 U	<b>0.005 J</b>	N/A	0.0022 U	0.002 U	N/A
Heptachlor	mg/kg		N/A	N/A	0.0013 U	<b>0.00041 J</b>	0.0022 U	0.002 U	N/A	0.002 UJ	<b>0.0012 J</b>	N/A	<b>0.0016 J</b>	0.002 U	N/A
Heptachlor epoxide	mg/kg		N/A	N/A	0.0019 U	0.002 U	<b>0.0026</b>	0.002 U	N/A	0.002 U	0.002 U	N/A	<b>0.0031</b>	0.002 U	N/A
Methoxychlor	mg/kg		N/A	N/A	0.0187 UJ	0.02 UJ	0.0216 U	0.0204 U	N/A	0.0201 UJ	0.02 UJ	N/A	0.022 U	0.02 U	N/A

Detections in bold

Values in red indicate an exceedance of the Project Action Limit (PAL)

\*indicates non-validated data

N/A indicates that the parameter was not analyzed for this sample

<sup>^</sup>PAH compounds were analyzed via SIM

U: This analyte was not detected in the sample. The numeric value represents the sample quantitation/detection limit.

UJ: This analyte was not detected in the sample. The actual quantitation/detection limit may be higher than reported.

J: The positive result reported for this analyte is a quantitative estimate.

J-: The positive result reported for this analyte is a quantitative estimate, but may be biased low.

B: This analyte was not detected substantially above the level of the associated method or field blank.

**Table 1 - Sub-Parcel B7-2  
Summary of Organics Detected in Soil**

Parameter	Units	PAL	B7-036-SB-1	B7-036-SB-2	B7-036-SB-5	B7-042-SB-1	B7-042-SB-2	B7-042-SB-5	B7-043-SB-1*	B7-043-SB-2*	B7-043-SB-4*	B7-044-SB-1	B7-044-SB-2	B7-044-SB-5	B7-047-SB-1	B7-047-SB-5
			10/4/2018	10/4/2018	10/4/2018	10/4/2018	10/4/2018	10/4/2018	10/4/2018	10/5/2018	10/5/2018	10/5/2018	10/4/2018	10/4/2018	10/4/2018	10/3/2018
<b>Semi-Volatile Organic Compounds<sup>^</sup></b>																
2-Methylnaphthalene	mg/kg	3,000	<b>0.026</b>	<b>0.0025 J</b>	0.0077 U	<b>0.023</b>	0.0082 U	0.0077 U	<b>0.002 J</b>	0.0078 U	0.0082 U	<b>0.0054 J</b>	<b>0.0021 J</b>	0.0079 U	0.0084 U	0.0079 U
Acenaphthene	mg/kg	45,000	<b>0.0059 J</b>	0.0081 U	0.0077 U	<b>0.0027 J</b>	0.0082 U	0.0077 U	0.0081 U	0.0078 U	0.0082 U	0.0083 U	0.0085 U	0.0079 U	0.0084 U	0.0079 U
Acenaphthylene	mg/kg	45,000	<b>0.0043 J</b>	<b>0.001 J</b>	0.0077 U	<b>0.037</b>	0.0082 U	0.0077 U	0.0081 U	0.0078 U	0.0082 U	0.0083 U	0.0085 U	0.0079 U	0.0084 U	0.0079 U
Acetophenone	mg/kg	120,000	0.085 U	0.08 U	0.076 U	0.098 U	0.08 U	0.077 U	0.08 U	0.077 U	0.082 U	0.081 U	0.085 U	0.079 U	0.086 U	0.08 U
Anthracene	mg/kg	230,000	<b>0.019</b>	<b>0.0022 J</b>	0.0077 U	<b>0.027</b>	<b>0.00076 J</b>	0.0077 U	0.0081 U	0.0078 U	0.0082 U	<b>0.0013 J</b>	0.0085 U	0.0079 U	0.0084 U	0.0079 U
Benz[a]anthracene	mg/kg	21	<b>0.055</b>	<b>0.012</b>	0.0077 U	<b>0.13</b>	<b>0.0063 J</b>	0.0077 U	<b>0.0049 J</b>	0.0078 U	0.0082 U	<b>0.0085</b>	0.0085 U	0.0079 U	<b>0.0016 J</b>	0.0079 U
Benzaldehyde	mg/kg	120,000	0.085 U	0.08 U	0.076 U	0.098 U	0.08 U	0.077 U	0.08 U	0.077 U	0.082 U	0.081 U	0.085 U	0.079 U	0.086 U	0.08 U
Benzo[a]pyrene	mg/kg	2.1	<b>0.056</b>	<b>0.011</b>	0.0077 U	<b>0.14</b>	<b>0.0053 J</b>	0.0077 U	<b>0.0066 J</b>	0.0078 U	0.0082 U	<b>0.0084</b>	0.0085 U	0.0079 U	<b>0.00073 J</b>	0.0079 U
Benzo[b]fluoranthene	mg/kg	21	<b>0.1</b>	<b>0.021</b>	0.0077 U	<b>0.26</b>	<b>0.01</b>	0.0077 U	<b>0.011</b>	0.0078 U	0.0082 U	<b>0.017</b>	0.0085 U	0.0079 U	0.0084 U	0.0079 U
Benzo[g,h,i]perylene	mg/kg		<b>0.032</b>	<b>0.0068 J</b>	0.0077 U	<b>0.075</b>	<b>0.0027 J</b>	0.0077 U	<b>0.0055 J</b>	0.0078 U	0.0082 U	<b>0.0055 J</b>	0.0085 U	0.0079 U	0.0084 U	0.0079 U
Benzo[k]fluoranthene	mg/kg	210	<b>0.09</b>	<b>0.019</b>	0.0077 U	<b>0.23</b>	<b>0.0089</b>	0.0077 U	<b>0.0036 J</b>	0.0078 U	0.0082 U	<b>0.015</b>	0.0085 U	0.0079 U	0.0084 U	0.0079 U
bis(2-Ethylhexyl)phthalate	mg/kg	160	0.085 U	0.08 U	0.076 U	0.098 U	0.08 U	0.077 U	0.08 U	0.077 U	0.082 U	0.081 U	0.085 U	0.079 U	0.086 U	0.08 U
Carbazole	mg/kg		0.085 U	0.08 U	0.076 U	0.098 U	0.08 U	0.077 U	0.08 U	0.077 U	0.082 U	0.081 U	0.085 U	0.079 U	0.086 U	0.08 U
Chrysene	mg/kg	2,100	<b>0.06</b>	<b>0.012</b>	0.0077 U	<b>0.13</b>	<b>0.0058 J</b>	0.0077 U	<b>0.0057 J</b>	0.0078 U	0.0082 U	<b>0.0096</b>	0.0085 U	0.0079 U	<b>0.00079 J</b>	0.0079 U
Dibenz[a,h]anthracene	mg/kg	2.1	<b>0.011</b>	<b>0.0022 J</b>	0.0077 U	<b>0.026</b>	0.0082 U	0.0077 U	0.0081 U	0.0078 U	0.0082 U	0.0083 U	0.0085 U	0.0079 U	0.0084 U	0.0079 U
Diethylphthalate	mg/kg	660,000	0.085 U	0.08 U	0.076 U	0.098 U	0.08 U	0.077 U	0.08 U	0.077 U	0.082 U	0.081 U	0.085 U	0.079 U	0.086 U	0.08 U
Di-n-butylphthalate	mg/kg	82,000	0.085 U	0.08 U	0.076 U	0.098 U	0.08 U	0.077 U	0.08 U	0.077 U	0.082 U	0.081 U	0.085 U	0.079 U	0.086 U	<b>0.024 J</b>
Di-n-octylphthalate	mg/kg	8,200	0.085 U	0.08 U	0.076 U	0.098 U	0.08 U	0.077 U	0.08 U	0.077 U	0.082 U	0.081 U	0.085 U	0.079 U	0.064 B	0.059 B
Fluoranthene	mg/kg	30,000	<b>0.1</b>	<b>0.021</b>	0.0077 U	<b>0.23</b>	<b>0.0083</b>	0.0077 U	<b>0.0058 J</b>	0.0078 U	0.0082 U	<b>0.014</b>	0.0085 U	0.0079 U	0.0015 B	0.0079 U
Fluorene	mg/kg	30,000	<b>0.0071 J</b>	0.0081 U	0.0077 U	<b>0.0057 J</b>	0.0082 U	0.0077 U	0.0081 U	0.0078 U	0.0082 U	0.0083 U	0.0085 U	0.0079 U	0.0084 U	0.0079 U
Indeno[1,2,3-c,d]pyrene	mg/kg	21	<b>0.03</b>	<b>0.0065 J</b>	0.0077 U	<b>0.077</b>	<b>0.0028 J</b>	0.0077 U	<b>0.0046 J</b>	0.0078 U	0.0082 U	<b>0.0051 J</b>	0.0085 U	0.0079 U	0.0084 U	0.0079 U
Naphthalene	mg/kg	8.6	<b>0.025 J</b>	<b>0.003 J</b>	0.0077 UJ	<b>0.09 J</b>	0.0082 UJ	0.0077 UJ	<b>0.0019 J</b>	<b>0.0015 J</b>	0.0082 U	<b>0.0056 J</b>	0.0085 UJ	<b>0.027 J</b>	0.0084 U	0.0079 U
Phenanthrene	mg/kg		<b>0.098</b>	<b>0.011</b>	0.0077 U	<b>0.098</b>	<b>0.0033 J</b>	0.0077 U	<b>0.0032 J</b>	0.0078 U	0.0082 U	<b>0.0091</b>	<b>0.00098 J</b>	<b>0.0015 J</b>	<b>0.0011 J</b>	0.0079 U
Pyrene	mg/kg	23,000	<b>0.092</b>	<b>0.018</b>	0.0077 U	<b>0.18</b>	<b>0.007 J</b>	0.0077 U	<b>0.0054 J</b>	0.0078 U	0.0082 U	<b>0.013</b>	0.0085 U	0.0079 U	<b>0.0014 J</b>	0.0079 U
<b>PCBs</b>																
Aroclor 1260	mg/kg	0.99	0.021 U	N/A	N/A	<b>0.096</b>	N/A	N/A	0.02 U	N/A	N/A	0.021 U	N/A	N/A	0.021 U	N/A
Aroclor 1268	mg/kg		0.021 UJ	N/A	N/A	0.025 UJ	N/A	N/A	0.02 U	N/A	N/A	0.021 UJ	N/A	N/A	0.021 U	N/A
PCBs (total)	mg/kg	0.97	0.19 U	N/A	N/A	<b>0.096 J</b>	N/A	N/A	0.18 U	N/A	N/A	0.19 U	N/A	N/A	0.19 U	N/A
<b>TPH/Oil &amp; Grease</b>																
Diesel Range Organics	mg/kg	6,200	<b>18.5 J</b>	<b>7.8 J</b>	7.7 UJ	<b>18.6 J</b>	<b>8.1 J</b>	7.6 UJ	8.1 U	<b>5 J</b>	8.1 U	<b>12.5 J</b>	<b>11.1 J</b>	<b>5.7 J</b>	<b>19.4 J</b>	7.9 UJ
Oil & Grease	mg/kg	6,200	<b>659</b>	<b>476</b>	<b>418</b>	<b>452</b>	<b>380</b>	<b>313</b>	<b>330</b>	<b>383</b>	<b>419</b>	<b>519</b>	<b>515</b>	<b>373</b>	<b>585 J-</b>	<b>705 J-</b>
<b>Pesticides</b>																
4,4'-DDD	mg/kg		<b>0.0019 J</b>	0.004 U	N/A	0.0051 U	0.004 U	N/A	0.0041 U	0.004 U	N/A	0.0041 U	0.0042 U	N/A	N/A	N/A
4,4'-DDE	mg/kg		<b>0.0054 J</b>	0.004 U	N/A	0.0051 U	0.004 U	N/A	0.0041 U	0.004 U	N/A	0.0041 U	0.0042 U	N/A	N/A	N/A
4,4'-DDT	mg/kg		0.0042 UJ	0.004 UJ	N/A	<b>0.0079 J</b>	0.004 UJ	N/A	0.0041 U	0.004 U	N/A	0.0041 UJ	0.0042 UJ	N/A	N/A	N/A
Aldrin	mg/kg		<b>0.146 J</b>	0.002 U	N/A	0.0025 U	0.002 U	N/A	0.002 U	0.002 U	N/A	0.0021 U	0.0021 U	N/A	N/A	N/A
alpha-Chlordane	mg/kg		<b>0.0782</b>	<b>0.0082</b>	N/A	0.0007 U	0.002 UJ	N/A	0.002 U	0.002 U	N/A	0.0021 UJ	0.00069 U	N/A	N/A	N/A
Dieldrin	mg/kg		<b>0.003 J</b>	0.004 U	N/A	<b>0.0052 J</b>	0.004 U	N/A	0.0041 U	0.004 U	N/A	0.0041 U	0.0042 U	N/A	N/A	N/A
Endosulfan I	mg/kg		<b>0.0115</b>	<b>0.0013 J</b>	N/A	<b>0.00063 J</b>	0.002 U	N/A	0.002 U	0.002 U	N/A	0.0021 U	0.0021 U	N/A	N/A	N/A
Endosulfan II	mg/kg		<b>0.0052 J</b>	0.004 U	N/A	0.0051 U	0.004 U	N/A	0.0041 U	0.004 U	N/A	0.0041 U	0.0042 U	N/A	N/A	N/A
Endrin	mg/kg		<b>0.0093 J</b>	0.004 U	N/A	<b>0.0084 J</b>	0.004 U	N/A	0.0041 U	0.004 U	N/A	0.0041 U	0.0042 U	N/A	N/A	N/A
Endrin aldehyde	mg/kg		<b>0.0196 J</b>	0.004 U	N/A	0.0037 U	0.004 U	N/A	0.0041 U	0.004 U	N/A	0.0041 U	<b>0.0022 J</b>	N/A	N/A	N/A
Endrine ketone	mg/kg		<b>0.004 J</b>	<b>0.00081 J</b>	N/A	<b>0.0068 J</b>	0.004 UJ	N/A	0.0041 U	0.004 U	N/A	0.0041 UJ	0.0042 UJ	N/A	N/A	N/A
gamma-Chlordane	mg/kg		<b>0.13 J</b>	<b>0.0232 J</b>	N/A	<b>0.0043</b>	0.002 U	N/A	0.002 U	0.002 U	N/A	<b>0.001 J</b>	0.0021 U	N/A	N/A	N/A
Heptachlor	mg/kg		<b>0.00067 J</b>	0.002 UJ	N/A	0.0025 UJ	0.002 UJ	N/A	0.002 U	0.002 U	N/A	0.0021 UJ	0.0021 UJ	N/A	N/A	N/A
Heptachlor epoxide	mg/kg		<b>0.057</b>	<b>0.0072</b>	N/A	0.0025 U	0.002 U	N/A	0.002 U	0.002 U	N/A	0.0021 U	0.0021 U	N/A	N/A	N/A
Methoxychlor	mg/kg		0.0212 UJ	0.0202 UJ	N/A	<b>0.0052 J</b>	0.0202 UJ	N/A	0.0203 U	0.0198 U	N/A	0.0207 UJ	0.0209 UJ	N/A	N/A	N/A

**Detections in bold**

Values in red indicate an exceedance of the Project Action Limit (PAL)

\*indicates non-validated data

N/A indicates that the parameter was not analyzed for this sample

<sup>^</sup>PAH compounds were analyzed via SIM

U: This analyte was not detected in the sample. The numeric value represents the sample quantitation/detection limit.

UJ: This analyte was not detected in the sample. The actual quantitation/detection limit may be higher than reported.

J: The positive result reported for this analyte is a quantitative estimate.

J-: The positive result reported for this analyte is a quantitative estimate, but may be biased low.

B: This analyte was not detected substantially above the level of the associated method or field blank.

**Table 2 - Sub-Parcel B7-2  
Summary of Inorganics Detected in Soil**

Parameter	Units	PAL	B3-030-SB-1*	B3-030-SB-5*	B7-028-SB-1	B7-028-SB-2	B7-029-SB-1*	B7-029-SB-2*	B7-029-SB-5*	B7-033-SB-1	B7-033-SB-2
			5/23/2017	5/23/2017	10/4/2018	10/4/2018	10/5/2018	10/5/2018	10/5/2018	10/5/2018	10/4/2018
<b>Metals</b>											
Aluminum	mg/kg	1,100,000	<b>15,800</b>	<b>15,600</b>	<b>30,000</b>	<b>17,200</b>	<b>10,200</b>	<b>14,600</b>	<b>18,300</b>	<b>12,600</b>	<b>13,200</b>
Arsenic	mg/kg	3	<b>4.6</b>	<b>6.2</b>	<b>5.2</b>	<b>7.1</b>	<b>3.8</b>	<b>2.9</b>	<b>4.6</b>	<b>7.7</b>	<b>8.6</b>
Barium	mg/kg	220,000	<b>119</b>	<b>35.7</b>	<b>337 J</b>	<b>61.6 J</b>	<b>83.3</b>	<b>64.7</b>	<b>40.2</b>	<b>77.7 J</b>	<b>73.8 J</b>
Beryllium	mg/kg	2,300	<b>1.1</b>	<b>0.54 J</b>	<b>3.9</b>	<b>0.74 J</b>	<b>0.41 J</b>	<b>0.42 J</b>	<b>1.3</b>	<b>0.67 J</b>	<b>0.73 J</b>
Cadmium	mg/kg	980	<b>1 J</b>	<i>1.5 U</i>	<i>1.3 U</i>	<i>1.4 U</i>	<i>1.5 U</i>	<i>1.4 U</i>	<i>1.4 U</i>	<i>1.4 U</i>	<i>1.4 U</i>
Chromium	mg/kg	120,000	<b>641</b>	<b>16.1</b>	<b>122</b>	<b>23.2</b>	<b>17.8</b>	<b>16.2</b>	<b>23.3</b>	<b>22.4</b>	<b>42.2</b>
Chromium VI	mg/kg	6.3	<i>0.61 B</i>	<i>0.85 B</i>	<i>1.1 UJ</i>	<i>1.2 UJ</i>	<b>2.1</b>	<i>1.2 U</i>	<i>1.2 U</i>	<i>1.2 UJ</i>	<i>1.2 UJ</i>
Cobalt	mg/kg	350	<b>7.5</b>	<b>4.2 J</b>	<b>6.1</b>	<b>3.8 J</b>	<b>5.2</b>	<b>3.4 J</b>	<b>3.6 J</b>	<b>11.4</b>	<b>8.3</b>
Copper	mg/kg	47,000	<b>38.9</b>	<b>7.4</b>	<b>26.7</b>	<b>12.6</b>	<b>18.3</b>	<b>5.8</b>	<b>8.7</b>	<b>13.9</b>	<b>19.5</b>
Iron	mg/kg	820,000	<b>127,000</b>	<b>27,100</b>	<b>56,300</b>	<b>17,100</b>	<b>11,900</b>	<b>15,800</b>	<b>18,300</b>	<b>16,100</b>	<b>25,900</b>
Lead	mg/kg	800	<b>89.4</b>	<b>6.3</b>	<b>43 J</b>	<b>14.9 J</b>	<b>45.9</b>	<b>10.7</b>	<b>16.6</b>	<b>38.2 J</b>	<b>86.8 J</b>
Manganese	mg/kg	26,000	<b>11,700</b>	<b>38.7</b>	<b>6,310</b>	<b>70.8</b>	<b>285</b>	<b>39</b>	<b>24.4</b>	<b>592</b>	<b>536</b>
Mercury	mg/kg	350	<b>0.083 J</b>	<i>0.11 U</i>	<b>0.04 J</b>	<i>0.12 U</i>	<b>0.12 J</b>	<b>0.017 J</b>	<i>0.12 U</i>	<b>0.16</b>	<b>1.4</b>
Nickel	mg/kg	22,000	<b>18.9</b>	<b>9.1 J</b>	<b>16.4</b>	<b>9.4</b>	<b>9.4 J</b>	<b>7.4 J</b>	<b>8.7 J</b>	<b>14.1</b>	<b>16.1</b>
Selenium	mg/kg	5,800	<i>4.1 U</i>	<i>4 U</i>	<b>2.7 J</b>	<i>3.7 U</i>	<i>4 U</i>	<i>3.8 U</i>	<i>3.8 U</i>	<i>3.7 U</i>	<b>2.7 J</b>
Silver	mg/kg	5,800	<b>8.3</b>	<b>0.58 J</b>	<i>2.6 U</i>	<i>2.8 U</i>	<i>3 U</i>	<i>2.8 U</i>	<i>2.8 U</i>	<i>2.8 U</i>	<i>2.8 U</i>
Vanadium	mg/kg	5,800	<b>520</b>	<b>23.8</b>	<b>252 J</b>	<b>30.3 J</b>	<b>33.9</b>	<b>24.4</b>	<b>30.5</b>	<b>37.5 J</b>	<b>76 J</b>
Zinc	mg/kg	350,000	<b>309</b>	<b>21.7</b>	<b>140</b>	<b>23.3</b>	<b>109</b>	<b>28.9</b>	<b>19.5</b>	<b>99.6</b>	<b>128</b>
<b>Other</b>											
Cyanide	mg/kg	150	<b>1.6</b>	<i>1.1 U</i>	<b>0.38 J</b>	<i>1.1 U</i>	<i>1.2 U</i>	<i>1.1 U</i>	<i>1.1 U</i>	<i>1.2 U</i>	<b>0.24 J+</b>

**Detections above reporting limit in bold**

**Values in red indicate an exceedance of the Project Action Limit (PAL)**

\*indicates non-validated data

U: This analyte was not detected in the sample. The numeric value represents the sample quantitation/detection limit.

UJ: This analyte was not detected in the sample. The actual quantitation/detection limit may be higher than reported.

J: The positive result reported for this analyte is a quantitative estimate.

J-: The positive result reported for this analyte is a quantitative estimate, but may be biased low.

J+: The positive result reported for this analyte is a quantitative estimate, but may be biased high.

B: This analyte was not detected substantially above the level of the associated method or field blank.

**Table 2 - Sub-Parcel B7-2  
Summary of Inorganics Detected in Soil**

Parameter	Units	PAL	B7-033-SB-5	B7-035-SB-1*	B7-035-SB-2*	B7-035-SB-5*	B7-036-SB-1	B7-036-SB-2	B7-036-SB-5	B7-042-SB-1	B7-042-SB-2
			10/4/2018	10/5/2018	10/5/2018	10/5/2018	10/4/2018	10/4/2018	10/4/2018	10/4/2018	10/4/2018
<b>Metals</b>											
Aluminum	mg/kg	1,100,000	<b>14,000</b>	<b>12,200</b>	<b>13,300</b>	<b>12,300</b>	<b>11,300</b>	<b>18,200</b>	<b>16,800</b>	<b>15,600</b>	<b>15,300</b>
Arsenic	mg/kg	3	<b>3.6</b>	<b>7.2</b>	<b>6.9</b>	<b>3.9</b>	<b>16.3</b>	<b>6.6</b>	<b>4.6</b>	<b>5.6</b>	<b>5.9</b>
Barium	mg/kg	220,000	<b>48.3 J</b>	<b>70.6</b>	<b>59.4</b>	<b>36.7</b>	<b>166 J</b>	<b>61.6 J</b>	<b>27.4 J</b>	<b>93.5 J</b>	<b>56.5 J</b>
Beryllium	mg/kg	2,300	<b>0.56 J</b>	<b>0.67 J</b>	<b>0.55 J</b>	<b>0.52 J</b>	<b>0.67 J</b>	<b>0.69 J</b>	<b>0.76 J</b>	<b>0.76 J</b>	<b>0.55 J</b>
Cadmium	mg/kg	980	<i>1.3 U</i>	<i>1.5 U</i>	<i>1.4 U</i>	<i>1.4 U</i>	<b>1.4 J</b>	<i>1.4 U</i>	<i>1.3 U</i>	<i>1.7 U</i>	<i>1.4 U</i>
Chromium	mg/kg	120,000	<b>19.5</b>	<b>25.8</b>	<b>19.9</b>	<b>17.5</b>	<b>41.2</b>	<b>29.8</b>	<b>19.7</b>	<b>70.4</b>	<b>23</b>
Chromium VI	mg/kg	6.3	<i>1.2 UJ</i>	<i>1.3 U</i>	<i>1.2 U</i>	<i>1.2 U</i>	<i>1.3 UJ</i>	<i>1.2 UJ</i>	<i>1.2 UJ</i>	<i>1.5 UJ</i>	<i>1.2 UJ</i>
Cobalt	mg/kg	350	<b>11.6</b>	<b>8.5</b>	<b>6.9</b>	<b>4.2 J</b>	<b>11.5</b>	<b>5.9</b>	<b>4.3 J</b>	<b>12.4</b>	<b>6</b>
Copper	mg/kg	47,000	<b>5.8</b>	<b>21.2</b>	<b>10.3</b>	<b>8.1</b>	<b>29.2</b>	<b>16</b>	<b>5.7</b>	<b>18.4</b>	<b>11.9</b>
Iron	mg/kg	820,000	<b>16,500</b>	<b>16,900</b>	<b>16,900</b>	<b>14,000</b>	<b>20,200</b>	<b>19,300</b>	<b>16,000</b>	<b>21,300</b>	<b>17,000</b>
Lead	mg/kg	800	<b>16.4 J</b>	<b>55</b>	<b>22.4</b>	<b>8.9</b>	<b>125 J</b>	<b>29.6 J</b>	<b>11 J</b>	<b>68.2 J</b>	<b>26 J</b>
Manganese	mg/kg	26,000	<b>96.5</b>	<b>455</b>	<b>286</b>	<b>86.8</b>	<b>4,060</b>	<b>184</b>	<b>36.1</b>	<b>750</b>	<b>119</b>
Mercury	mg/kg	350	<b>0.074 J</b>	<b>0.6</b>	<b>0.076 J</b>	<i>0.12 U</i>	<b>0.26</b>	<b>0.0098 J</b>	<i>0.11 U</i>	<b>0.39</b>	<b>0.1 J</b>
Nickel	mg/kg	22,000	<b>13.9</b>	<b>14.7</b>	<b>11.5</b>	<b>10.9</b>	<b>20</b>	<b>13</b>	<b>10.5</b>	<b>16.1</b>	<b>11.3</b>
Selenium	mg/kg	5,800	<i>3.5 U</i>	<i>4.1 U</i>	<i>3.8 U</i>	<i>3.7 U</i>	<i>4 U</i>	<i>3.7 U</i>	<i>3.6 U</i>	<i>4.5 U</i>	<i>3.8 U</i>
Silver	mg/kg	5,800	<i>2.7 U</i>	<i>3.1 U</i>	<i>2.8 U</i>	<i>2.8 U</i>	<i>3 U</i>	<i>2.8 U</i>	<i>2.7 U</i>	<i>3.4 U</i>	<i>2.9 U</i>
Vanadium	mg/kg	5,800	<b>31.4 J</b>	<b>46.4</b>	<b>31.4</b>	<b>21.3</b>	<b>70.1 J</b>	<b>42.1 J</b>	<b>29.2 J</b>	<b>294 J</b>	<b>36.7 J</b>
Zinc	mg/kg	350,000	<b>45.8</b>	<b>163</b>	<b>53</b>	<b>25.6</b>	<b>378</b>	<b>75.1</b>	<b>25</b>	<b>102</b>	<b>62.5</b>
<b>Other</b>											
Cyanide	mg/kg	150	<i>1 U</i>	<i>1.2 U</i>	<i>1.2 U</i>	<i>1 U</i>	<b>0.24 J</b>	<b>0.17 J</b>	<i>0.98 U</i>	<i>1.2 U</i>	<i>0.98 U</i>

**Detections above reporting limit in bold**

**Values in red indicate an exceedance of the Project Action Limit (PAL)**

\*indicates non-validated data

U: This analyte was not detected in the sample. The numeric value represents the sample quantitation/detection limit.

UJ: This analyte was not detected in the sample. The actual quantitation/detection limit may be higher than reported.

J: The positive result reported for this analyte is a quantitative estimate.

J-: The positive result reported for this analyte is a quantitative estimate, but may be biased low.

J+: The positive result reported for this analyte is a quantitative estimate, but may be biased high.

B: This analyte was not detected substantially above the level of the associated method or field blank.



**Table 2 - Sub-Parcel B7-2  
Summary of Inorganics Detected in Soil**

Parameter	Units	PAL	B7-042-SB-5	B7-043-SB-1*	B7-043-SB-2*	B7-043-SB-4*	B7-044-SB-1	B7-044-SB-2	B7-044-SB-5	B7-047-SB-1	B7-047-SB-5
			10/4/2018	10/5/2018	10/5/2018	10/5/2018	10/4/2018	10/4/2018	10/4/2018	10/3/2018	10/3/2018
<b>Metals</b>											
Aluminum	mg/kg	1,100,000	<b>14,500</b>	<b>23,100</b>	<b>18,300</b>	<b>17,600</b>	<b>12,300</b>	<b>30,100</b>	<b>14,700</b>	<b>16,500</b>	<b>12,100</b>
Arsenic	mg/kg	3	<b>4.1</b>	<b>8.9</b>	<b>8</b>	<b>4.8</b>	<b>8.2</b>	<b>8.5</b>	<b>4</b>	<b>3.2</b>	<b>2.8</b>
Barium	mg/kg	220,000	<b>72.1 J</b>	<b>76.4</b>	<b>44.7</b>	<b>42.6</b>	<b>72.4 J</b>	<b>71.3 J</b>	<b>19.1 J</b>	<b>62.2 J</b>	<b>14.9 J</b>
Beryllium	mg/kg	2,300	<b>0.5 J</b>	<b>0.72 J</b>	<b>0.4 J</b>	<b>0.64 J</b>	<b>0.65 J</b>	<b>1.1</b>	<b>0.58 J</b>	<b>0.73 J</b>	<b>0.49 J</b>
Cadmium	mg/kg	980	<i>1.3 U</i>	<i>1.4 U</i>	<i>1.4 U</i>	<i>1.4 U</i>	<i>1.5 U</i>	<i>1.5 U</i>	<i>1.4 U</i>	<i>1.5 U</i>	<i>1.4 U</i>
Chromium	mg/kg	120,000	<b>13.8</b>	<b>35.6</b>	<b>24.9</b>	<b>19.5</b>	<b>22.1</b>	<b>40.5</b>	<b>12.8</b>	<b>19.9 J</b>	<b>13.3 J</b>
Chromium VI	mg/kg	6.3	<b>0.63 J-</b>	<i>1.2 U</i>	<i>1.2 U</i>	<i>1.2 U</i>	<i>1.2 UJ</i>	<i>1.2 UJ</i>	<i>1.2 UJ</i>	<i>1.3 U</i>	<b>0.82 J</b>
Cobalt	mg/kg	350	<b>2.7 J</b>	<b>3.8 J</b>	<b>3.7 J</b>	<b>2.2 J</b>	<b>13.9</b>	<b>5.8</b>	<b>2.1 J</b>	<b>16.2</b>	<b>3.1 J</b>
Copper	mg/kg	47,000	<b>5.2</b>	<b>12.8</b>	<b>9.2</b>	<b>7.5</b>	<b>19.8</b>	<b>18.2</b>	<b>4.2 J-</b>	<b>6.7</b>	<b>5.4</b>
Iron	mg/kg	820,000	<b>10,400</b>	<b>27,500</b>	<b>11,900</b>	<b>9,470</b>	<b>15,100</b>	<b>28,700</b>	<b>11,300</b>	<b>16,800</b>	<b>15,600</b>
Lead	mg/kg	800	<b>10.5 J</b>	<b>14.2</b>	<b>11.1</b>	<b>10.6</b>	<b>57.3 J</b>	<b>15.6 J</b>	<b>10.9 J</b>	<b>12.6 J</b>	<b>7.4 J</b>
Manganese	mg/kg	26,000	<b>24.3</b>	<b>223</b>	<b>81.9</b>	<b>63.6</b>	<b>510</b>	<b>51.3</b>	<b>12.6</b>	<b>463 J</b>	<b>23.4 J</b>
Mercury	mg/kg	350	<i>0.11 U</i>	<b>0.026 J</b>	<i>0.11 U</i>	<i>0.12 U</i>	<b>0.16</b>	<i>0.12 U</i>	<i>0.11 U</i>	<b>0.026 J</b>	<i>0.12 U</i>
Nickel	mg/kg	22,000	<b>5.5 J</b>	<b>12.4</b>	<b>14.6</b>	<b>7.4 J</b>	<b>14.8</b>	<b>14.9</b>	<b>5.9 J</b>	<b>13.2</b>	<b>7 J</b>
Selenium	mg/kg	5,800	<i>3.6 U</i>	<i>3.7 U</i>	<i>3.7 U</i>	<i>3.7 U</i>	<i>3.9 U</i>	<i>4 U</i>	<i>3.7 U</i>	<i>3.9 U</i>	<i>3.8 U</i>
Silver	mg/kg	5,800	<i>2.7 U</i>	<i>2.8 U</i>	<i>2.8 U</i>	<i>2.8 U</i>	<i>2.9 U</i>	<i>3 U</i>	<i>2.8 U</i>	<i>2.9 U</i>	<i>2.8 U</i>
Vanadium	mg/kg	5,800	<b>23.3 J</b>	<b>57.3</b>	<b>29.2</b>	<b>24.1</b>	<b>44.2 J</b>	<b>59.4 J</b>	<b>19.5 J</b>	<b>30.6</b>	<b>18.7</b>
Zinc	mg/kg	350,000	<b>15.2</b>	<b>47.7</b>	<b>30.8</b>	<b>19.3</b>	<b>116</b>	<b>46.5</b>	<b>14.5</b>	<b>44.3</b>	<b>18.8</b>
<b>Other</b>											
Cyanide	mg/kg	150	<i>1.1 U</i>	<b>0.18 J</b>	<i>1.1 U</i>	<i>1.2 U</i>	<b>0.14 J</b>	<i>1.1 U</i>	<i>0.97 U</i>	<i>1.1 U</i>	<i>1.1 U</i>

**Detections above reporting limit in bold**

**Values in red indicate an exceedance of the Project Action Limit (PAL)**

\*indicates non-validated data

U: This analyte was not detected in the sample. The numeric value represents the sample quantitation/detection limit.

UJ: This analyte was not detected in the sample. The actual quantitation/detection limit may be higher than reported.

J: The positive result reported for this analyte is a quantitative estimate.

J-: The positive result reported for this analyte is a quantitative estimate, but may be biased low.

J+: The positive result reported for this analyte is a quantitative estimate, but may be biased high.

B: This analyte was not detected substantially above the level of the associated method or field blank.

**Table 3 - Sub-Parcel B7-2  
Summary of Organics Detected in Groundwater**

Parameter	Units	PAL	SW-045-MWS	SW-045-MWS	SW-048-MWS	SW-048-MWS
			1/20/2016	2/13/2023	1/21/2016	2/16/2023
<b>Volatile Organic Compounds</b>						
Acetone	µg/L	14,000	<b>9.2 J</b>	5 U	10 U	5 U
Benzene	µg/L	5	1 U	0.5 U	1 U	<b>0.75</b>
Methyl tert-butyl ether (MTBE)	µg/L	14	<b>2.5</b>	1 U	1 U	1 U
<b>Semi-Volatile Organic Compounds<sup>^</sup></b>						
Anthracene	µg/L	1,800	0.11 U	<b>0.04 J</b>	0.1 U	0.1 U
bis(2-Ethylhexyl)phthalate	µg/L	6	1.2 U	3 U	<b>0.69 J</b>	3 U
Naphthalene	µg/L	0.17	<b>0.038 B</b>	0.1 U	<b>0.038 B</b>	0.1 U
<b>TPH/Oil &amp; Grease</b>						
Diesel Range Organics	µg/L	47	104 UJ	500 U	<b>40.3 J</b>	500 U
Gasoline Range Organics	µg/L	47	200 U	<b>18 J</b>	200 U	<b>22 J</b>
Oil & Grease	µg/L	47	NA	4000 U	NA	<b>6,800</b>

**Detections in bold**

**Values in red indicate an exceedance of the Project Action Limit (PAL)**

<sup>^</sup>PAH compounds were analyzed via SIM

NA: Not analyzed for this parameter

U: This analyte was not detected in the sample. The numeric value represents the sample quantitation/detection limit.

UJ: This analyte was not detected in the sample. The actual quantitation/detection limit may be higher than reported.

J: The positive result reported for this analyte is a quantitative estimate.

B: This analyte was not detected substantially above the level of the associated method or field blank.

Note that some TPH/Oil & Grease

**Table 4 - Sub-Parcel B7-2  
Summary of Inorganics Detected in Groundwater**

Parameter	Units	PAL	SW-045-MWS	SW-045-MWS	SW-048-MWS	SW-048-MWS
			1/20/2016	2/13/2023	1/21/2016	2/16/2023
<b>Metal</b>						
Aluminum	µg/L	20,000	<b>603</b>	NA	<b>2,090</b>	NA
Barium	µg/L	2,000	<b>20.5</b>	NA	<b>27.2</b>	NA
Beryllium	µg/L	4	<b>1.1</b>	NA	<b>1.9</b>	NA
Cadmium	µg/L	5	<b>0.86 B</b>	NA	<b>1.1 B</b>	NA
Cobalt	µg/L	6	<b>64.7</b>	NA	<b>161</b>	NA
Copper	µg/L	1,300	<i>5 U</i>	NA	<b>4 J</b>	NA
Iron	µg/L	14,000	<b>1,010</b>	NA	<b>23,800</b>	NA
Manganese	µg/L	430	<b>1,140</b>	NA	<b>8,620</b>	NA
Nickel	µg/L	390	<b>103</b>	NA	<b>94.1</b>	NA
Vanadium	µg/L	86	<b>0.74 J</b>	NA	<b>2.6 J</b>	NA
Zinc	µg/L	6,000	<b>146</b>	NA	<b>214</b>	NA
Aluminum, Dissolve	µg/L	20,000	<b>625</b>	<b>228</b>	<b>2,040</b>	<b>42.1</b>
Antimony, Dissolve	µg/L	6	<i>6 U</i>	<i>4.0 U</i>	<i>6 U</i>	<b>0.6133 J</b>
Arsenic, Dissolve	µg/L	10	<i>5 U</i>	<b>0.221 J</b>	<i>5 U</i>	<b>0.4689 J</b>
Barium, Dissolve	µg/L	2,000	<b>20.1</b>	<b>21.92</b>	<b>26.1</b>	<b>36.73</b>
Beryllium, Dissolve	µg/L	4	<b>1.1</b>	<b>0.4177 J</b>	<b>2.4</b>	<b>0.1071 J</b>
Cadmium, Dissolve	µg/L	5	<b>0.74 B</b>	<b>0.2555</b>	<b>1.4 B</b>	<i>0.2 U</i>
Chromium, Dissolve	µg/L	100	<i>5 U</i>	<b>0.3936 J</b>	<i>5 U</i>	<i>1.0 U</i>
Cobalt, Dissolve	µg/L	6	<b>65.1</b>	<b>15.5</b>	<b>166</b>	<b>49</b>
Copper, Dissolve	µg/L	1,300	<i>5 U</i>	<b>2.664</b>	<b>3.3 J</b>	<i>1.0 U</i>
Iron, Dissolve	µg/L	14,000	<b>1,450</b>	<b>55.2</b>	<b>22,200</b>	<b>25,100</b>
Lead, Dissolve	µg/L	15	<i>5 U</i>	<i>1.0 U</i>	<b>3.4 B</b>	<i>1.0 U</i>
Manganese, Dissolve	µg/L	430	<b>1,100</b>	<b>164.6</b>	<b>8,510</b>	<b>3,246</b>
Nickel, Dissolve	µg/L	390	<b>105</b>	<b>46.95</b>	<b>93.6</b>	<b>21.65</b>
Thallium, Dissolve	µg/L	2	<i>10 U</i>	<b>0.1682 J</b>	<i>10 U</i>	<b>0.4179 J</b>
Vanadium, Dissolve	µg/L	86	<b>0.77 J</b>	<i>5.0 U</i>	<b>2.6 J</b>	<i>5.0 U</i>
Zinc, Dissolve	µg/L	6,000	<b>153</b>	<b>59.56</b>	<b>206</b>	<b>25.4</b>

**Detections above reporting limit in bold**

**Values in red indicate an exceedance of the Project Action Limit (PAL)**

NA: Not analyzed for this parameter

U: This analyte was not detected in the sample. The numeric value represents the sample quantitation/detection limit.

J: The positive result reported for this analyte is a quantitative estimate.

B: This analyte was not detected substantially above the level of the associated method or field blank.

**Table 5 - Sub-Parcel B7-2  
Cumulative Vapor Intrusion Risks**

				SW-045-MWS 1/20/2016		SW-045-MWS 2/13/2023		SW-048-MWS 1/21/2016		SW-048-MWS 2/16/2023	
Parameter	Type	Organ Systems	VI Screening Criteria (ug/L)	Conc. (ug/L)	Risk/ Hazard	Conc. (ug/L)	Risk/ Hazard	Conc. (ug/L)	Risk/ Hazard	Conc. (ug/L)	Risk/ Hazard
<b>Cancer Risk</b>											
Benzene	VOC	Immune	69	1 U	0	0.5 U	0	1 U	0	<b>0.75</b>	1.09E-07
Methyl tert-butyl ether (MTBE)	VOC	Hepatic; Ocular; Urinary	20,000	<b>2.5</b>	1.25E-09	1 U	0	1 U	0	1 U	0
Naphthalene	SVOC	Nervous; Respiratory	200	<b>0.038 B</b>	1.90E-09	0.1 U	0	<b>0.038 B</b>	1.90E-09	0.1 U	0
Cumulative Vapor Intrusion Cancer Risk						3.15E-09		0		1.90E-09	1.09E-07
<b>Non-Cancer Risk</b>											
Cumulative Vapor Intrusion Non-Cancer Hazard						0		0		0	0

**Detections in bold**

**Values in red indicate an exceedance of the VISL**

Yellow highlighted values indicate exceedances of the cumulative vapor intrusion criteria:  
TCR > 1E-05 or THI > 1

Conc. = Concentration

U: This analyte was not detected in the sample. The numeric value represents the sample quantitation/detection limit.

B: This analyte was not detected substantially above the level of the associated method or field blank.

**Table 6 - Sub-Parcel B7-2  
COPC Screening Analysis**

Parameter	CAS#	Location of Max Result	Max Detection (mg/kg)	Final Flag	Min Detection (mg/kg)	Average Detection (mg/kg)	Total Samples	Frequency of Detection (%)	Cancer TR=1E-06 (mg/kg)	Non-Cancer HQ=0.1 (mg/kg)	COPC?
2-Methylnaphthalene	91-57-6	B3-030-SB-1	0.042	J	0.002	0.01	27	48.15		300	no
4,4'-DDD	72-54-8	B7-036-SB-1	0.0019	J	0.0019	0.002	16	6.25	9.6	2.5	no
4,4'-DDE	72-55-9	B7-036-SB-1	0.0054	J	0.0054	0.01	16	6.25	9.3	35	no
4,4'-DDT	50-29-3	B7-042-SB-1	0.0079	J	0.0079	0.01	16	6.25	8.5	52	no
Acenaphthene	83-32-9	B3-030-SB-1	0.019	J	0.001	0.01	27	22.22		4,500	no
Acenaphthylene	208-96-8	B7-033-SB-2	0.057		0.001	0.01	27	33.33			no
Acetophenone	98-86-2	B3-030-SB-1	0.043	J	0.043	0.04	27	3.70		12,000	no
Aldrin	309-00-2	B7-036-SB-1	0.146	J	0.146	0.15	16	6.25	0.18	3.5	no
alpha-Chlordane	5103-71-9	B7-036-SB-1	0.0782		0.00028	0.01	16	43.75			no
Aluminum	7429-90-5	B7-044-SB-2	30,100		10,200	16,137	27	100.00		110,000	no
Anthracene	120-12-7	B7-033-SB-2	0.04		0.00076	0.01	27	48.15		23,000	no
Aroclor 1260	11096-82-5	B7-042-SB-1	0.096		0.029	0.06	10	20.00	0.99		no
Arsenic	7440-38-2	B7-036-SB-1	16.3		2.8	6.07	27	100.00	3	48	YES (C)
Barium	7440-39-3	B7-028-SB-1	337	J	14.9	73.7	27	100.00		22,000	no
Benz[a]anthracene	56-55-3	B3-030-SB-1	0.24		0.0013	0.05	27	59.26	21		no
Benzaldehyde	100-52-7	B3-030-SB-1	0.074	J	0.074	0.07	27	3.70	820	12,000	no
Benzo[a]pyrene	50-32-8	B7-033-SB-2	0.24		0.00073	0.05	27	59.26	2.1	22	no
Benzo[b]fluoranthene	205-99-2	B7-033-SB-2	0.47		0.0013	0.10	27	55.56	21		no
Benzo[g,h,i]perylene	191-24-2	B3-030-SB-1	0.15		0.002	0.03	27	51.85			no
Benzo[k]fluoranthene	207-08-9	B7-033-SB-2	0.41		0.0036	0.07	27	51.85	210		no
Beryllium	7440-41-7	B7-028-SB-1	3.9		0.4	0.79	27	100.00	6,900	230	no
bis(2-Ethylhexyl)phthalate	117-81-7	B3-030-SB-1	0.15		0.15	0.15	27	3.70	160	1,600	no
Cadmium	7440-43-9	B7-036-SB-1	1.4	J	1	1.20	27	7.41	9,300	10	no
Carbazole	86-74-8	B3-030-SB-1	0.046	J	0.046	0.05	27	3.70			no
Chromium	7440-47-3	B3-030-SB-1	641		12.8	51.6	27	100.00		180,000	no
Chromium VI	18540-29-9	B7-029-SB-1	2.1		0.63	1.18	27	11.11	6.3	350	no
Chrysene	218-01-9	B3-030-SB-1	0.29		0.00051	0.05	27	59.26	2,100		no
Cobalt	7440-48-4	B7-047-SB-1	16.2		2.1	6.60	27	100.00	1,900	35	no
Copper	7440-50-8	B3-030-SB-1	38.9		4.2	13.6	27	100.00		4,700	no
Cyanide	57-12-5	B3-030-SB-1	1.6		0.14	0.42	27	25.93		120	no
Dibenz[a,h]anthracene	53-70-3	B3-030-SB-1	0.045	J	0.002	0.01	27	37.04	2.1		no
Dieldrin	60-57-1	B7-042-SB-1	0.0052	J	0.003	0.00	16	12.50	0.14	4.1	no

J: The positive result reported for this analyte is a quantitative estimate.

COPC = Constituent of Potential Concern

TR = Target Risk

HQ = Hazard Quotient

C = Compound was identified as a cancer COPC

NC = Compound was identified as a non-cancer COPC

\*PCBs (total) include the sum of all detected aroclor mixtures, including those without RSLs (e.g. Aroclor 1262, Aroclor 1268) which are not displayed.

^Lead is assessed separately through the ALM and IEUBK models.

**Table 6 - Sub-Parcel B7-2  
COPC Screening Analysis**

Parameter	CAS#	Location of Max Result	Max Detection (mg/kg)	Final Flag	Min Detection (mg/kg)	Average Detection (mg/kg)	Total Samples	Frequency of Detection (%)	Cancer TR=1E-06 (mg/kg)	Non-Cancer HQ=0.1 (mg/kg)	COPC?
Diethylphthalate	84-66-2	B3-030-SB-1	0.02	J	0.02	0.02	27	3.70		66,000	no
Di-n-butylphthalate	84-74-2	B7-047-SB-5	0.024	J	0.024	0.02	27	3.70		8,200	no
Di-n-octylphthalate	117-84-0	B3-030-SB-1	0.077	J	0.077	0.08	27	3.70		820	no
Endosulfan I	959-98-8	B7-036-SB-1	0.0115		0.00063	0.004	16	18.75			no
Endosulfan II	33213-65-9	B7-036-SB-1	0.0052	J	0.00099	0.003	16	12.50			no
Endrin	72-20-8	B7-036-SB-1	0.0093	J	0.0011	0.01	16	25.00		25	no
Endrin aldehyde	7421-93-4	B7-036-SB-1	0.0196	J	0.0019	0.01	16	18.75			no
Endrine ketone	53494-70-5	B7-042-SB-1	0.0068	J	0.00081	0.004	16	25.00			no
Fluoranthene	206-44-0	B3-030-SB-1	0.45		0.00078	0.09	27	55.56		3,000	no
Fluorene	86-73-7	B3-030-SB-1	0.014	J	0.0012	0.01	27	22.22		3,000	no
gamma-Chlordane	5103-74-2	B7-036-SB-1	0.13	J	0.001	0.03	16	37.50			no
Heptachlor	76-44-8	B7-035-SB-1	0.0016	J	0.00041	0.001	16	25.00	0.63	58	no
Heptachlor epoxide	1024-57-3	B7-036-SB-1	0.057		0.0026	0.02	16	25.00	0.33	1.5	no
Indeno[1,2,3-c,d]pyrene	193-39-5	B3-030-SB-1	0.13		0.0019	0.03	27	51.85	21		no
Iron	7439-89-6	B3-030-SB-1	127,000		9,470	22,977	27	100.00		82,000	YES (NC)
Lead^	7439-92-1	B7-036-SB-1	125	J	6.3	32.02	27	100.00		800	no
Manganese	7439-96-5	B3-030-SB-1	11,700		12.6	1,005	27	100.00		2,600	YES (NC)
Mercury	7439-97-6	B7-033-SB-2	1.4		0.0098	0.22	27	59.26		35	no
Methoxychlor	72-43-5	B7-042-SB-1	0.0052	J	0.0052	0.01	16	6.25		410	no
Naphthalene	91-20-3	B7-042-SB-1	0.09	J	0.0015	0.02	27	55.56	8.6	59	no
Nickel	7440-02-0	B7-036-SB-1	20		5.5	12.1	27	100.00	64,000	2,200	no
PCBs (total)*	1336-36-3	B7-042-SB-1	0.096	J	0.096	0.10	10	10.00	0.94		no
Phenanthrene	85-01-8	B3-030-SB-1	0.23		0.00098	0.04	27	62.96			no
Pyrene	129-00-0	B3-030-SB-1	0.34		0.0014	0.08	27	55.56		2,300	no
Pyrene	129-00-0	B7-033-SB-2	0.34		0.0014	0.08	27	55.56		2,300	no
Selenium	7782-49-2	B7-028-SB-1	2.7	J	2.7	2.70	27	7.41		580	no
Selenium	7782-49-2	B7-033-SB-2	2.7	J	2.7	2.70	27	7.41		580	no
Silver	7440-22-4	B3-030-SB-1	8.3		0.58	4.44	27	7.41		580	no
Vanadium	7440-62-2	B3-030-SB-1	520		18.7	71.8	27	100.00		580	no
Zinc	7440-66-6	B7-036-SB-1	378		14.5	80.1	27	100.00		35,000	no

J: The positive result reported for this analyte is a quantitative estimate.

COPC = Constituent of Potential Concern

TR = Target Risk

HQ = Hazard Quotient

C = Compound was identified as a cancer COPC

NC = Compound was identified as a non-cancer COPC

\*PCBs (total) include the sum of all detected arochlor mixtures, including those without RSLs (e.g. Aroclor 1262, Aroclor 1268) which are not displayed.

^Lead is assessed separately through the ALM and IEUBK models.

**Table 7 - Sub-Parcel B7-2  
Assessment of Lead**

<b>Exposure Unit</b>	<b>Surface/Sub-Surface</b>	<b>Maximum Concentration (mg/kg)</b>	<b>Arithmetic Mean (mg/kg)</b>
EU1 (11.6 ac.)	Surface	125	55.9
	Sub-Surface	86.8	20.1
	Pooled	125	32.6
EU1-EXP (13.6 ac.)	Surface	125	54.9
	Sub-Surface	86.8	18.6
	Pooled	125	32.0



**Table 8 - Sub-Parcel B7-2  
Soil Exposure Point Concentrations**

Parameter	EU1 (11.6 ac.)					
	EPCs - Surface Soils		EPCs - Sub-Surface Soils		EPCs - Pooled Soils	
	EPC Type	EPC (mg/kg)	EPC Type	EPC (mg/kg)	EPC Type	EPC (mg/kg)
Arsenic	<b>Maximum Value</b>	<b>16.3</b>	95% Student's-t UCL	6.47	95% Student's-t UCL	7.41
Iron	<b>Maximum Value</b>	<b>56,300</b>	95% Student's-t UCL	18,974	95% Modified-t UCL	22,503
Manganese	<b>Maximum Value</b>	<b>6,310</b>	95% Adjusted Gamma UCL	198	95% Chebyshev (Mean, Sd) UCL	1,999

**Bold indicates maximum value used as the EPC**

**Table 8 - Sub-Parcel B7-2  
Soil Exposure Point Concentrations**

Parameter	EU1-EXP (13.6 ac.)					
	EPCs - Surface Soils		EPCs - Sub-Surface Soils		EPCs - Pooled Soils	
	EPC Type	EPC (mg/kg)	EPC Type	EPC (mg/kg)	EPC Type	EPC (mg/kg)
Arsenic	95% Student's-t UCL	9.25	95% Student's-t UCL	6.28	95% Student's-t UCL	6.98
Iron	95% Chebyshev (Mean, Sd) UCL	81,715	95% Student's-t UCL	19,494	95% Chebyshev (Mean, Sd) UCL	41,983
Manganese	95% Chebyshev (Mean, Sd) UCL	7,787	95% Adjusted Gamma UCL	172	95% Chebyshev (Mean, Sd) UCL	3,138

**Table 9 - Sub-Parcel B7-2  
Surface Soils  
Composite Worker Risk Ratios**

Parameter	Target Organs	EU1 (11.6 ac.)				
		EPC (mg/kg)	Composite Worker			
			RSLs (mg/kg)		Risk Ratios	
			Cancer	Non-Cancer	Risk	HQ
<b>Arsenic</b>	<b>Cardiovascular; Dermal</b>	<b>16.3</b>	3.00	480	5.4E-06	0.03
<b>Iron</b>	<b>Gastrointestinal</b>	<b>56,300</b>		820,000		0.07
<b>Manganese</b>	<b>Nervous</b>	<b>6,310</b>		26,000		0.2
					<b>5E-06</b>	<b>↓</b>

**Bold indicates maximum value**

RSLs were obtained from the EPA Regional Screening Levels at

[https://epa-prgs.ornl.gov/cgi-bin/chemicals/csl\\_search](https://epa-prgs.ornl.gov/cgi-bin/chemicals/csl_search)

EPC: Exposure Point Concentration

HQ: Hazard Quotient

HI: Hazard Index

Total HI	Cardiovascular	0
	Dermal	0
	Gastrointestinal	0
	Nervous	0

**Table 10 - Sub-Parcel B7-2  
Subsurface Soils  
Composite Worker Risk Ratios**

Parameter	Target Organs	EU1 (11.6 ac.)				
		EPC (mg/kg)	Composite Worker			
			RSLs (mg/kg)		Risk Ratios	
			Cancer	Non-Cancer	Risk	HQ
Arsenic	Cardiovascular; Dermal	6.47	3.00	480	2.2E-06	0.01
Iron	Gastrointestinal	18,974		820,000		0.02
Manganese	Nervous	198		26,000		0.008
					<b>2E-06</b>	<b>↓</b>

RSLs were obtained from the EPA Regional Screening Levels at [https://epa-prgs.ornl.gov/cgi-bin/chemicals/csl\\_search](https://epa-prgs.ornl.gov/cgi-bin/chemicals/csl_search)  
 EPC: Exposure Point Concentration  
 HQ: Hazard Quotient  
 HI: Hazard Index

Total HI	Cardiovascular	0
	Dermal	0
	Gastrointestinal	0
	Nervous	0

**Table 11 - Sub-Parcel B7-2  
Pooled Soils  
Composite Worker Risk Ratios**

Parameter	Target Organs	EU1 (11.6 ac.)				
		EPC (mg/kg)	Composite Worker			
			RSLs (mg/kg)		Risk Ratios	
			Cancer	Non-Cancer	Risk	HQ
Arsenic	Cardiovascular; Dermal	7.41	3.00	480	2.5E-06	0.02
Iron	Gastrointestinal	22,503		820,000		0.03
Manganese	Nervous	1,999		26,000		0.08
					<b>2E-06</b>	<b>↓</b>

RSLs were obtained from the EPA Regional Screening Levels at [https://epa-prgs.ornl.gov/cgi-bin/chemicals/csl\\_search](https://epa-prgs.ornl.gov/cgi-bin/chemicals/csl_search)  
 EPC: Exposure Point Concentration  
 HQ: Hazard Quotient  
 HI: Hazard Index

Total HI	Cardiovascular	0
	Dermal	0
	Gastrointestinal	0
	Nervous	0

**Table 12 - Sub-Parcel B7-2  
Surface Soils  
Construction Worker Risk Ratios**

<b>165 Day</b>		<b>EU1-EXP (13.6 ac.)</b>				
<b>Parameter</b>	<b>Target Organs</b>	<b>EPC (mg/kg)</b>	<b>Construction Worker</b>			
			<b>SSLs (mg/kg)</b>		<b>Risk Ratios</b>	
			<b>Cancer</b>	<b>Non-Cancer</b>	<b>Risk</b>	<b>HQ</b>
<b>Arsenic</b>	<b>Cardiovascular; Dermal</b>	9.25	22.9	145	4.0E-07	0.06
<b>Iron</b>	<b>Gastrointestinal</b>	81,715		364,457		0.2
<b>Manganese</b>	<b>Nervous</b>	7,787		5,901		1
					<b>4E-07</b>	<b>↓</b>

SSLs calculated using equations in 2002 EPA Supplemental Guidance

Guidance Equation Input Assumptions:

5 cars/day (2 tons/car)

5 trucks/day (20 tons/truck)

3 meter source depth thickness

EPC: Exposure Point Concentration

HQ: Hazard Quotient

HI: Hazard Index

Total HI	Cardiovascular	0
	Dermal	0
	Gastrointestinal	0
	Nervous	1

**Table 13 - Sub-Parcel B7-2  
Subsurface Soils  
Construction Worker Risk Ratios**

<b>165 Day</b>		<b>EU1-EXP (13.6 ac.)</b>				
<b>Parameter</b>	<b>Target Organs</b>	<b>EPC (mg/kg)</b>	<b>Construction Worker</b>			
			<b>SSLs (mg/kg)</b>		<b>Risk Ratios</b>	
			<b>Cancer</b>	<b>Non-Cancer</b>	<b>Risk</b>	<b>HQ</b>
<b>Arsenic</b>	<b>Cardiovascular; Dermal</b>	6.28	22.9	145	2.7E-07	0.04
<b>Iron</b>	<b>Gastrointestinal</b>	19,494		364,457		0.05
<b>Manganese</b>	<b>Nervous</b>	172		5,901		0.03
					<b>3E-07</b>	<b>↓</b>

SSLs calculated using equations in 2002 EPA Supplemental Guidance

Guidance Equation Input Assumptions:

- 5 cars/day (2 tons/car)
- 5 trucks/day (20 tons/truck)
- 3 meter source depth thickness

EPC: Exposure Point Concentration

HQ: Hazard Quotient

HI: Hazard Index

Total HI	Cardiovascular	0
	Dermal	0
	Gastrointestinal	0
	Nervous	0



**Table 14 - Sub-Parcel B7-2  
Pooled Soils  
Construction Worker Risk Ratios**

<b>165 Day</b>		<b>EU1-EXP (13.6 ac.)</b>				
<b>Parameter</b>	<b>Target Organs</b>	<b>EPC (mg/kg)</b>	<b>Construction Worker</b>			
			<b>SSLs (mg/kg)</b>		<b>Risk Ratios</b>	
			<b>Cancer</b>	<b>Non-Cancer</b>	<b>Risk</b>	<b>HQ</b>
<b>Arsenic</b>	<b>Cardiovascular; Dermal</b>	6.98	22.9	145	3.0E-07	0.05
<b>Iron</b>	<b>Gastrointestinal</b>	41,983		364,457		0.1
<b>Manganese</b>	<b>Nervous</b>	3,138		5,901		0.5
					<b>3E-07</b>	<b>↓</b>

SSLs calculated using equations in 2002 EPA Supplemental Guidance

Guidance Equation Input Assumptions:

5 cars/day (2 tons/car)

5 trucks/day (20 tons/truck)

3 meter source depth thickness

EPC: Exposure Point Concentration

HQ: Hazard Quotient

HI: Hazard Index

Total HI	Cardiovascular	0
	Dermal	0
	Gastrointestinal	0
	Nervous	1

---

---

## **APPENDIX A**

---

---



March 28, 2023

Maryland Department of Environment  
1800 Washington Boulevard  
Baltimore MD, 21230  
Attention: Ms. Barbara Brown

**Subject: Request to Enter Temporary CHS Review  
Tradepoint Atlantic Sub-Parcel B7-2**

Dear Ms. Brown:

The conduct of any environmental assessment and cleanup activities on the Tradepoint Atlantic property, as well as any associated development, is subject to the requirements outlined in the following agreements:

- Administrative Consent Order (ACO) between Tradepoint Atlantic (formerly Sparrows Point Terminal, LLC) and the Maryland Department of the Environment (effective September 12, 2014); and
- Settlement Agreement and Covenant Not to Sue (SA) between Tradepoint Atlantic (formerly Sparrows Point Terminal, LLC) and the United States Environmental Protection Agency (effective November 25, 2014).

On September 11, 2014, Tradepoint Atlantic submitted an application to the Maryland Department of the Environment's (Department) Voluntary Cleanup Program (VCP).

In consultation with the Department, Tradepoint Atlantic affirms that it desires to accelerate the assessment, remediation, and redevelopment of certain sub-parcels within the larger site due to current market conditions. To that end, the Department and Tradepoint Atlantic agree that the Controlled Hazardous Substance (CHS) Act (Section 7-222 of the Environment Article) and the CHS Response Plan (COMAR 26.14.02) shall serve as the governing statutory and regulatory authority for completing the development activities on Sub-Parcel B7-2 and complement the statutory requirements of the Voluntary Cleanup Program (Section 7-501 of the Environment Article). Upon submission of a Site Response and Development Work Plan and completion of the remedial activities for the sub-parcel, the Department shall issue a "No Further Action" letter upon a recordation of an environmental covenant describing any necessary land use controls for the specific sub-parcel. At such time that all the sub-parcels within the larger parcel have completed remedial activities, Tradepoint Atlantic shall submit to the Department a request for issuing a Certificate of Completion (COC) as well as all pertinent information concerning completion of remedial activities conducted on the parcel. Once the VCP has completed its review of the



**TRADEPOINT  
ATLANTIC**

submitted information it shall issue a COC for the entire parcel described in Tradepoint Atlantic's VCP application.

Alternatively, Tradepoint Atlantic, or other entity may elect to submit an application for a specific sub-parcel and submit it to the VCP for review and acceptance. If the application is received after the cleanup and redevelopment activities described in this work plan are implemented and a No Further Action letter is issued by the Department pursuant to the CHS Act, the VCP shall prepare a No Further Requirements Determination for the sub-parcel.

If Tradepoint Atlantic or other entity has not carried out cleanup and redevelopment activities described in the work plan, the cleanup and redevelopment activities may be conducted under the oversight authority of either the VCP or the CHS Act, so long as those activities comport with this work plan.

Engineering and institutional controls approved as part of this Site Response and Development Work Plan shall be described in documentation submitted to the Department demonstrating that the exposure pathways on the sub-parcel are addressed in a manner that protects public health and the environment. This information shall support Tradepoint Atlantic's request for the issuance of a COC for the larger parcel.

Please do not hesitate to contact Tradepoint Atlantic for further information.

Thank you,

Matthew Newman

Environmental Manager  
TRADEPOINT ATLANTIC  
6995 Bethlehem Boulevard, Suite 100  
Baltimore, Maryland 21219  
T 443.649.5063 C 443.791.9046  
mnewman@tradepointatlantic.com

---

---

## **APPENDIX B**

---

---

## Keith Progin

---

**From:** Jennifer Sohns -MDE- <jennifer.sohns@maryland.gov>  
**Sent:** Thursday, April 20, 2023 9:40 AM  
**To:** Keith Progin  
**Cc:** Barbara Brown -MDE-  
**Subject:** Re: TPA\_B7 Clean Fill Sampling

CAUTION: External Email.

---

Keith,

The material is acceptable for unrestricted use on commercial and industrial parcels within the Sparrows Point site, with the exception of quadrangle 1 as you noted.

Thank you,

On Wed, Apr 19, 2023 at 3:33 PM Keith Progin <[kprogin@hcea.com](mailto:kprogin@hcea.com)> wrote:

Jennifer,

With the exception of quadrangle 1, you approved material from B7 as clean cap material (see email below). TPA is looking to move some of this material to the retail projects. Looking back at the email, I don't believe you clarified if it was good for commercial use, or just industrial. Can you please verify before they move any material to retail.

Thanks!

Keith Progin | Senior Environmental Project Manager

**HILLIS-CARNES ENGINEERING ASSOCIATES**

Cell (443) 250-9467  
Phone +1 (410) 880-4788  
Fax +1 (410) 880-4098

Sign up for AIA courses [here](#)

---

**From:** Jennifer Sohns -MDE- <[jennifer.sohns@maryland.gov](mailto:jennifer.sohns@maryland.gov)>  
**Sent:** Thursday, August 18, 2022 10:07 AM  
**To:** Keith Progin <[kprogin@hcea.com](mailto:kprogin@hcea.com)>  
**Cc:** Barbara Brown -MDE- <[barbara.brown1@maryland.gov](mailto:barbara.brown1@maryland.gov)>  
**Subject:** Re: TPA\_B7 Clean Fill Sampling

CAUTION: External Email.

---

Hi Kieth,

It is understood that the plan has been amended slightly and TPA plans to excavate material to a depth of 1.5' bgs, which will reduce the anticipated quantity of material. The plan is acceptable, however, an EP should be overseeing this work, and if significant areas of slag material are encountered, that material would need to be stockpiled separately for additional sampling. As stated in my previous email, material from quadrant S-1 is not acceptable for use as clean fill due to elevated manganese. You indicated that slag fill was observed in this area, which was confirmed by the sample results. That material can be used underneath a VCP cap on the site, if needed.

We are aware that an eagle's nest is located nearby and precautions must be taken, as required by law, to ensure that area is undisturbed.

This material must be tracked in accordance with the site's fill material management plan.

Please let me know if you have any questions.

Thank you,

**Jennifer Sohns**  
Project Manager  
Land Management Administration  
Maryland Department of the Environment  
[1800 Washington Boulevard](#)  
[Baltimore, Maryland 21230](#)  
[jennifer.sohns@maryland.gov](mailto:jennifer.sohns@maryland.gov)  
410-537-4472 (O)  
[Website](#) | [Facebook](#) | [Twitter](#)

Click here to complete a three question [customer experience survey](#).

On Tue, Aug 9, 2022 at 5:12 PM Keith Progin <[kprogin@hcea.com](mailto:kprogin@hcea.com)> wrote:

During the mass grading of Parcel B7 (Project Sandlot), TPA is anticipating stripping approximately the top two feet across the Site to be reused as clean cap material. TPA is anticipating approximately 40,000 cubic yards of material.

The Site was visually divided into ten sections. Five grab samples were collected from each of the ten sections. Each of the five grab samples was mixed to generate a single 5-point composite sample (for a total of ten composite samples). The five grab samples from each grid were collected with a stainless-steel hand auger to depths ranging between 12 inches and 18 inches

The ten composite samples were submitted to the laboratory for PCBs, PAHs, Priority Pollutant Metals, hexavalent chromium, and manganese. In addition, two grab samples collected from each section were analyzed for TPH-DRO (for a total of 20 grab samples).

Please see the attached package that includes a sampling map, the laboratory report, and a comparison table.

Please advise if the material is approved as clean cap material.

Thanks!


Keith Progin | Senior Environmental Project Manager

**HILLIS-CARNES ENGINEERING ASSOCIATES**

Corporate Headquarters  
[10975 Guilford Road, Suite A](#)  
[Annapolis Junction, MD 20701](#)  
Cell (443) 250-9467  
Phone +1 (410) 880-4788  
Fax +1 (410) 880-4098  
Email [kprogin@hcea.com](mailto:kprogin@hcea.com)

Website [www.hcea.com](http://www.hcea.com)

Sign up for AIA courses [here](#)

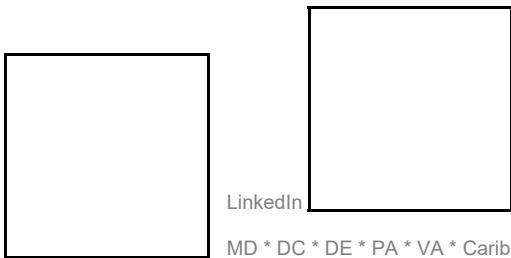

LinkedIn

MD \* DC \* DE \* PA \* VA \* Caribbean

2022 ENR Top Design Firm #329



## Keith Progin

---

**From:** Keith Progin  
**Sent:** Tuesday, August 16, 2022 4:28 PM  
**To:** Jennifer Sohns -MDE-  
**Cc:** Barbara Brown -MDE-  
**Subject:** RE: TPA\_B7 Clean Fill Sampling

That is an accurate summary. Slag will be brought in for the building pad. Also, TPA just informed me that they will be stripping approximately 1.5 feet (rather than 2 feet).

I wish I had a good reason for the 5-pt composite other than I was looking at an old sampling plan for a project not related to TPA that we did 5-pt composites and was thinking about how much hand augering would be required for 10-pt samples.

Thanks!

Keith Progin | Senior Environmental Project Manager  
HILLIS-CARNES ENGINEERING ASSOCIATES

Cell (443) 250-9467  
Phone +1 (410) 880-4788  
Fax +1 (410) 880-4098  
[Sign up for AIA courses here](#)

---

**From:** Jennifer Sohns -MDE- <jennifer.sohns@maryland.gov>  
**Sent:** Monday, August 15, 2022 4:11 PM  
**To:** Keith Progin <kprogin@hcea.com>  
**Cc:** Barbara Brown -MDE- <barbara.brown1@maryland.gov>  
**Subject:** Re: TPA\_B7 Clean Fill Sampling

**CAUTION: External Email.**

---

So TPA wants to remove the top 2' of this area and temporarily stockpile it within B7. Then TPA plans to bring slag onto development parcel B7-2 to raise the elevation of the site. Once that's complete, TPA wants to use the stockpiled material as a clean fill cap for the slag placed on B7-2. Any excess material is wanted for use as clean fill through the rest of the Sparrows Point site.

Is that correct?

Also, what about the 5-pt composite sampling vs. the required 10-pt composite method?

Thank you,

On Mon, Aug 15, 2022 at 2:13 PM Keith Progin <[kprogin@hcea.com](mailto:kprogin@hcea.com)> wrote:

TPA is calling this area Project Sandlot. They are planning on mass grading the area for a future building pad and believes the area they want to strip is free of slag. TPA hopes to use a portion of the material as clean cap material and any surplus would be used on other approved projects at TPA. They would stockpile the amount they need on B7 (Sandlot) and the surplus would be stockpiled in the approximate location of MCMs former building (northeast side of B3).

The S-1 area only had a very shallow area of good looking material before encountering what we believe was slag. We did not encounter slag in the remaining areas at the depths sampled and there was no evidence of odors, staining, or elevated PID readings.

Keith Progin | Senior Environmental Project Manager

**HILLIS-CARNES ENGINEERING ASSOCIATES**

Cell (443) 250-9467  
Phone +1 (410) 880-4788  
Fax +1 (410) 880-4098

Sign up for AIA courses [here](#)

---

**From:** Jennifer Sohns -MDE- <[jennifer.sohns@maryland.gov](mailto:jennifer.sohns@maryland.gov)>  
**Sent:** Monday, August 15, 2022 10:11 AM  
**To:** Keith Progin <[kprogin@hcea.com](mailto:kprogin@hcea.com)>  
**Cc:** Barbara Brown -MDE- <[barbara.brown1@maryland.gov](mailto:barbara.brown1@maryland.gov)>  
**Subject:** Re: TPA\_B7 Clean Fill Sampling

**CAUTION: External Email.**

Hey Keith,

I was just looking at this. Where would this material be going for cap fill? Will it be stockpiled somewhere prior to being placed? What was the thought behind 5-point composite sampling? Standard sampling protocol is 10-pt composite. What is the goal for starting this work? Manganese in S-1 is too high to be approved for clean fill.

Thanks,

**Jennifer Sohns**  
Project Manager  
Land Management Administration  
Maryland Department of the Environment  
[1800 Washington Boulevard](#)  
[Baltimore, Maryland 21230](#)  
[jennifer.sohns@maryland.gov](mailto:jennifer.sohns@maryland.gov)  
410-537-4472 (O)  
[Website](#) | [Facebook](#) | [Twitter](#)

Click here to complete a three question [customer experience survey](#).

On Mon, Aug 15, 2022 at 10:06 AM Keith Progin <[kprogin@hcea.com](mailto:kprogin@hcea.com)> wrote:

Barbara – are you able to advise on the status of the email below?

Thanks!

Keith Progin | Senior Environmental Project Manager

**HILLIS-CARNES ENGINEERING ASSOCIATES**

Cell (443) 250-9467  
Phone +1 (410) 880-4788  
Fax +1 (410) 880-4098

Sign up for AIA courses [here](#)

---

**From:** Keith Progin

**Sent:** Tuesday, August 9, 2022 5:12 PM

**To:** Barbara Brown -MDE- <[barbara.brown1@maryland.gov](mailto:barbara.brown1@maryland.gov)>; Jennifer Sohns -MDE- ([jennifer.sohns@maryland.gov](mailto:jennifer.sohns@maryland.gov)) <[jennifer.sohns@maryland.gov](mailto:jennifer.sohns@maryland.gov)>

**Subject:** TPA\_B7 Clean Fill Sampling

During the mass grading of Parcel B7 (Project Sandlot), TPA is anticipating stripping approximately the top two feet across the Site to be reused as clean cap material. TPA is anticipating approximately 40,000 cubic yards of material.

The Site was visually divided into ten sections. Five grab samples were collected from each of the ten sections. Each of the five grab samples was mixed to generate a single 5-point composite sample (for a total of ten composite samples). The five grab samples from each grid were collected with a stainless-steel hand auger to depths ranging between 12 inches and 18 inches

The ten composite samples were submitted to the laboratory for PCBs, PAHs, Priority Pollutant Metals, hexavalent chromium, and manganese. In addition, two grab samples collected from each section were analyzed for TPH-DRO (for a total of 20 grab samples).

Please see the attached package that includes a sampling map, the laboratory report, and a comparison table.

Please advise if the material is approved as clean cap material.

Thanks!


Keith Progin | Senior Environmental Project Manager

**HILLIS-CARNES ENGINEERING ASSOCIATES**

Corporate Headquarters  
[10975 Guilford Road, Suite A](#)  
[Annapolis Junction, MD 20701](#)  
Cell (443) 250-9467  
Phone +1 (410) 880-4788  
Fax +1 (410) 880-4098  
Email [kprogin@hcea.com](mailto:kprogin@hcea.com)

Website [www.hcea.com](http://www.hcea.com)


Sign up for AIA courses [here](#)

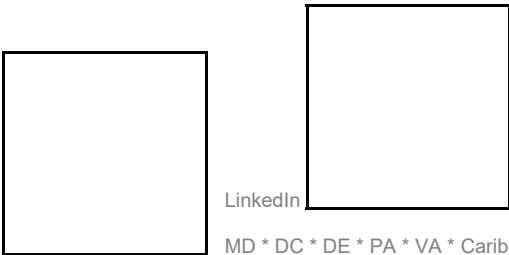

LinkedIn

MD \* DC \* DE \* PA \* VA \* Caribbean

2022 ENR Top Design Firm #329




*This message is intended only for the use of the individual or entity to which it is addressed and may contain information that is privileged, confidential and exempt from disclosure under applicable law. If the reader of this message is not the intended recipient, you are hereby notified that any dissemination,*

# Tradeport Atlantic Sampling

Project Name: Parcel B7 - Project Sandlot

- Sample Date: July 29, 2022
- Number of Samples: 10 composite and 20 grab
- Quantity: Approximately 40,000 cu yds
- Type: Hand Auger
- Location: B7 (see attached map)



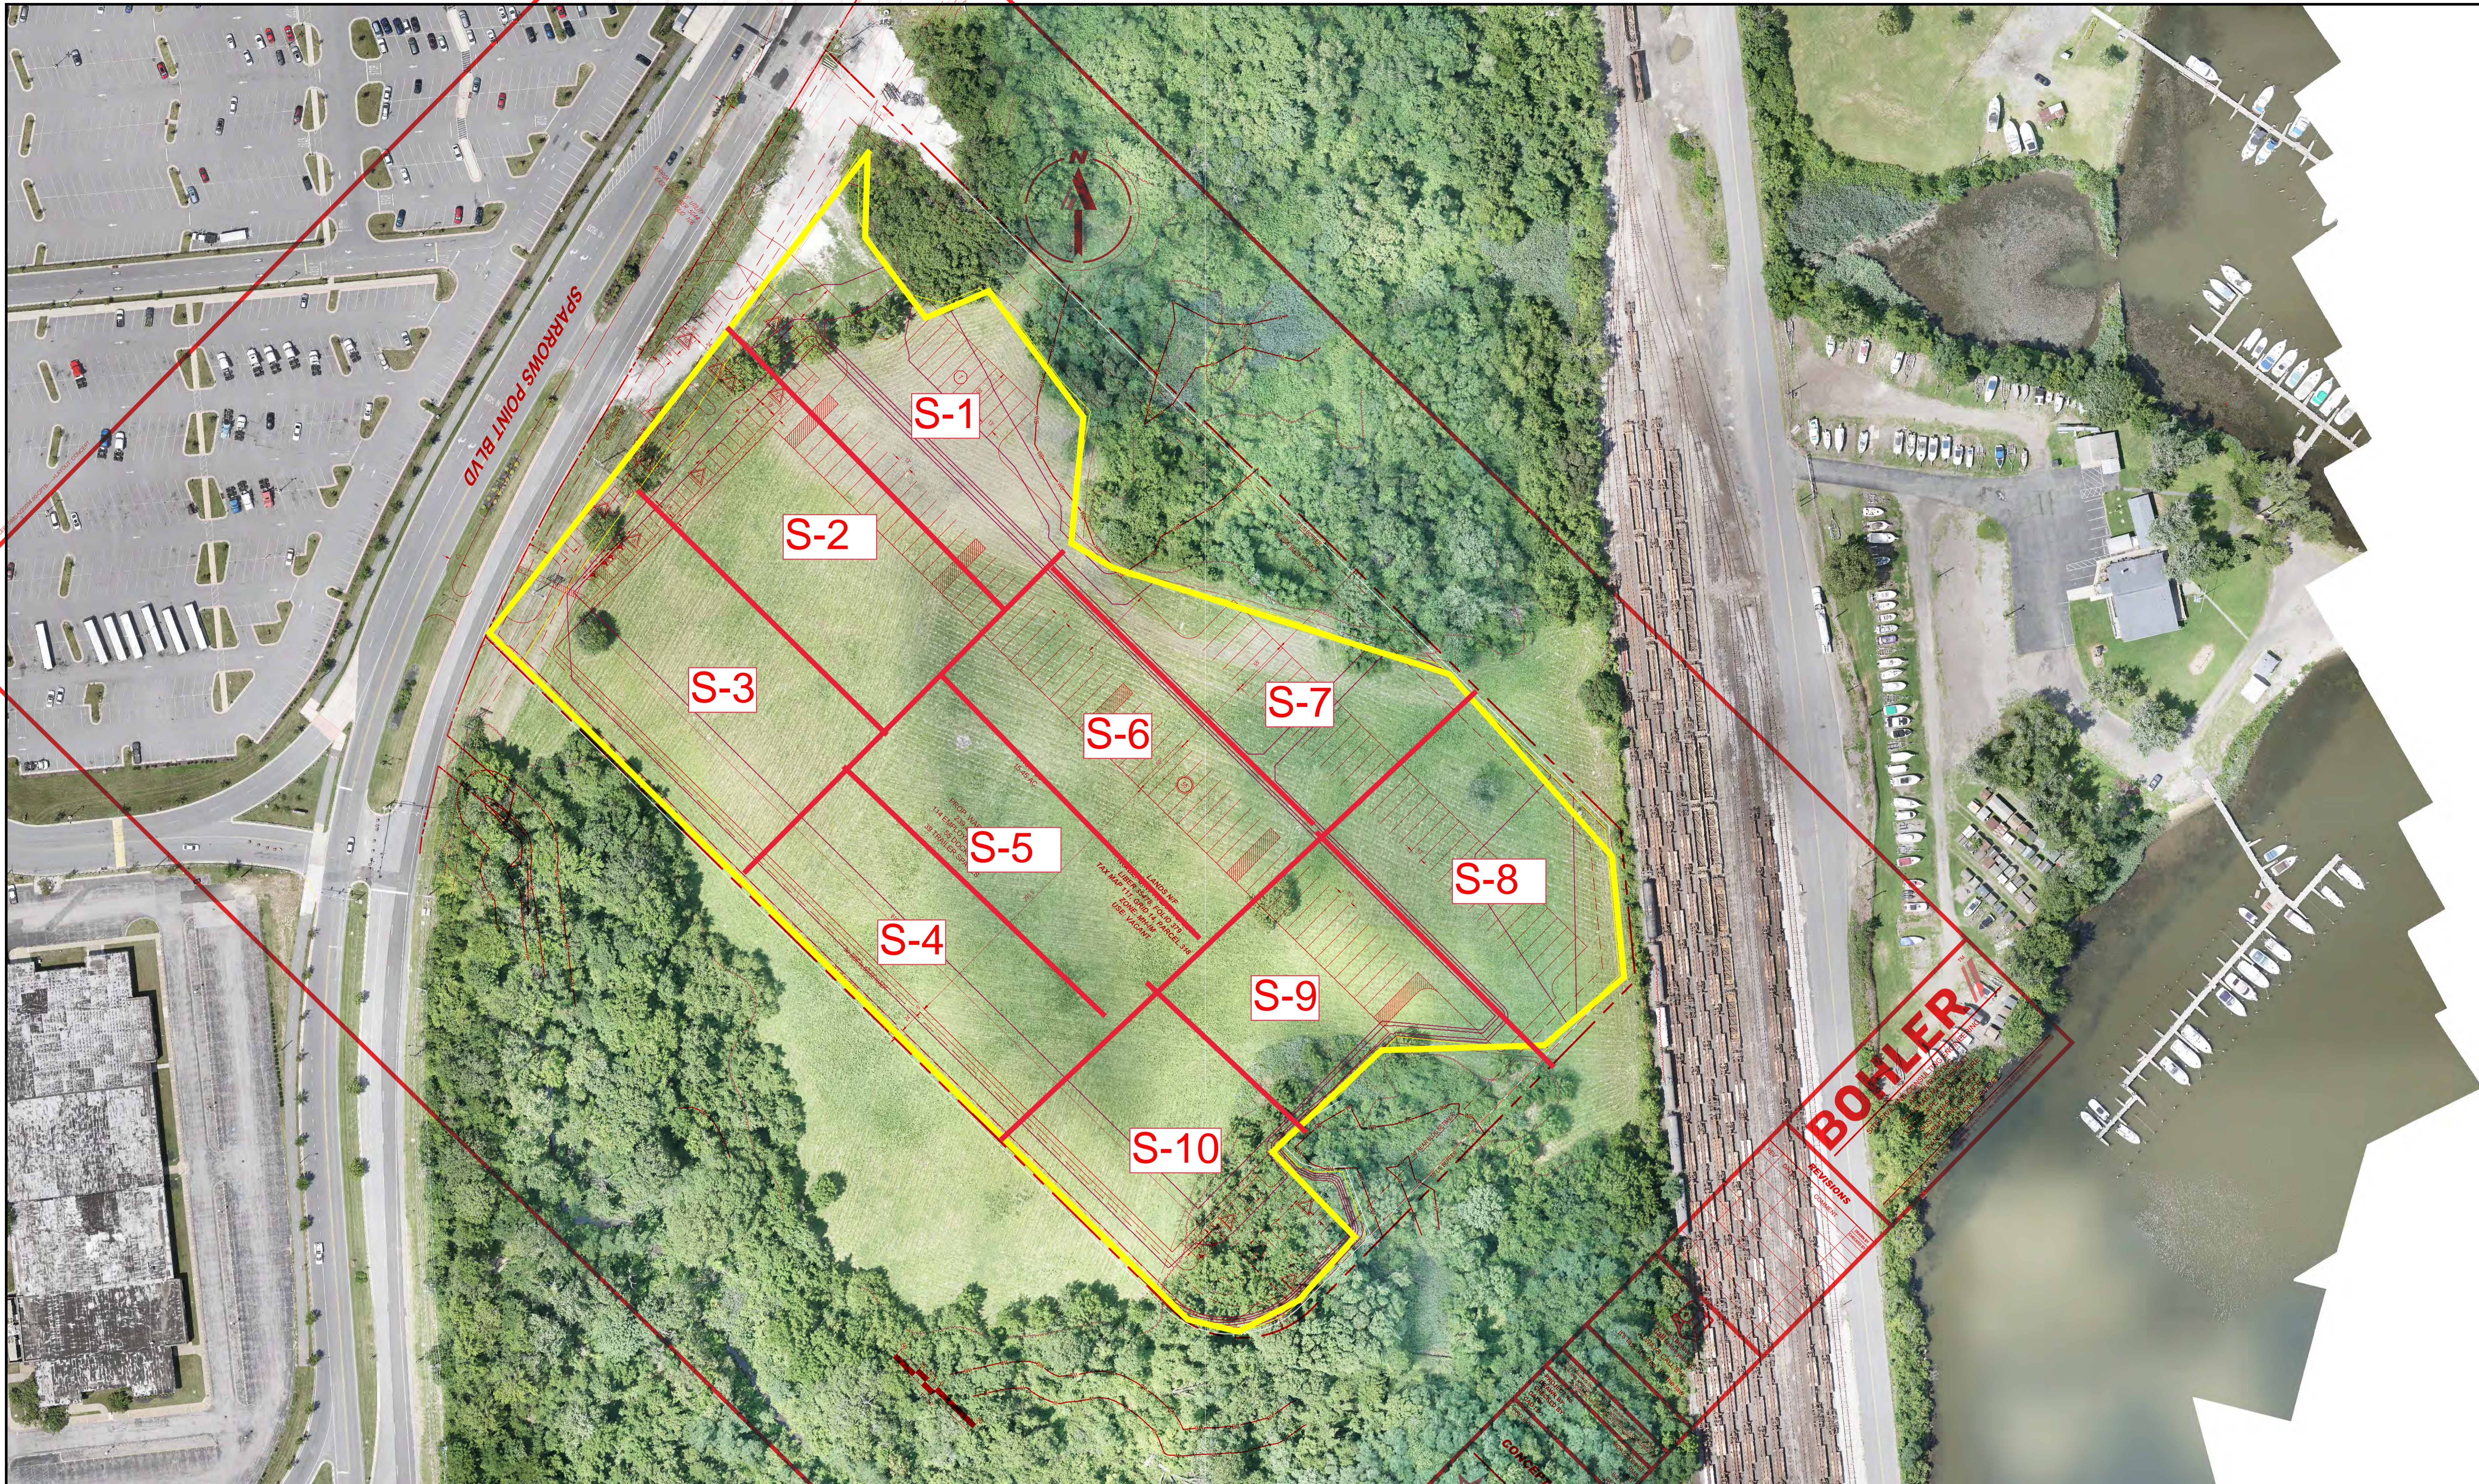

**LEGEND**  
 Sandlot grading - ACAD-  
 MDA220034.00\_-\_Z\_-\_Mass.dxf

- 0
- Zp-FtIn-Dayl
- Gp-Topo-Cont

**CONCEPT PLAN**

TRADEPOINT ATLANTIC

PROJECT SANDLOT  
 104 MAP 111 (TOWNSHIP SPARROWS POINT BLVD)  
 104 MAP 111 (TOWNSHIP SPARROWS POINT BLVD)  
 104 MAP 111 (TOWNSHIP SPARROWS POINT BLVD)  
 104 MAP 111 (TOWNSHIP SPARROWS POINT BLVD)  
 104 MAP 111 (TOWNSHIP SPARROWS POINT BLVD)

**BOHLER**

104 MAP 111 (TOWNSHIP SPARROWS POINT BLVD)  
 104 MAP 111 (TOWNSHIP SPARROWS POINT BLVD)  
 104 MAP 111 (TOWNSHIP SPARROWS POINT BLVD)  
 104 MAP 111 (TOWNSHIP SPARROWS POINT BLVD)  
 104 MAP 111 (TOWNSHIP SPARROWS POINT BLVD)

PROJECT TITLE: **CONCEPT '18'**

DATE: 1/18/18

1

DATE: 6/20/22

190 ft



Site: TPA Quad 01-NE  
 Survey: 14 Jul 2022 Quad 1  
 File Created: Jul 21, 2022





04 August 2022

Keith Progin  
Hillis-Carnes Engineering Associates  
10975 Guilford Rd  
Annapolis Junction, MD 20701  
RE: SAND LOT

Enclosed are the results of analyses for samples received by the laboratory on 07/29/22 16:35.

Maryland Spectral Services, Inc. is a TNI 2009 Standard accredited laboratory and as such, all analyses performed at Maryland Spectral Services included in this report are 2009 TNI certified except as indicated at the end of this report. Please visit our website at [www.mdspectral.com](http://www.mdspectral.com) for a complete listing of our TNI 2009 Standard accreditations.

If you have any questions concerning this report, please feel free to contact me.

Sincerely,



Rabecka Koons  
Quality Assurance Officer

## Analytical Results

**Project: SAND LOT**

Project Number: 22470A  
Project Manager: Keith Progin

Reported:  
08/04/22 16:34

Client Sample ID	Alternate Sample ID	Laboratory ID	Matrix	Date Sampled	Date Received
S-1		2072917-01	Soil	07/29/22 09:50	07/29/22 16:35
S-1A		2072917-02	Soil	07/29/22 09:30	07/29/22 16:35
S-1B		2072917-03	Soil	07/29/22 09:45	07/29/22 16:35
S-2		2072917-04	Soil	07/29/22 10:20	07/29/22 16:35
S-2A		2072917-05	Soil	07/29/22 10:05	07/29/22 16:35
S-2B		2072917-06	Soil	07/29/22 10:20	07/29/22 16:35
S-3		2072917-07	Soil	07/29/22 11:00	07/29/22 16:35
S-3A		2072917-08	Soil	07/29/22 10:30	07/29/22 16:35
S-3B		2072917-09	Soil	07/29/22 10:50	07/29/22 16:35
S-4		2072917-10	Soil	07/29/22 11:15	07/29/22 16:35
S-4A		2072917-11	Soil	07/29/22 11:15	07/29/22 16:35
S-4B		2072917-12	Soil	07/29/22 11:25	07/29/22 16:35
S-5		2072917-13	Soil	07/29/22 12:05	07/29/22 16:35
S-5A		2072917-14	Soil	07/29/22 11:45	07/29/22 16:35
S-5B		2072917-15	Soil	07/29/22 12:00	07/29/22 16:35
S-6		2072917-16	Soil	07/29/22 12:40	07/29/22 16:35
S-6A		2072917-17	Soil	07/29/22 12:25	07/29/22 16:35
S-6B		2072917-18	Soil	07/29/22 12:30	07/29/22 16:35
S-7		2072917-19	Soil	07/29/22 13:10	07/29/22 16:35
S-7A		2072917-20	Soil	07/29/22 13:00	07/29/22 16:35
S-7B		2072917-21	Soil	07/29/22 13:05	07/29/22 16:35
S-8		2072917-22	Soil	07/29/22 13:30	07/29/22 16:35



Rabecka Koons, Quality Assurance Officer

*The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report must be reproduced in its entirety.*

All analyses performed at Maryland Spectral Services included in the report are TNI certified except as indicated at the end of the report



## Analytical Results

**Project: SAND LOT**

Project Number: 22470A  
Project Manager: Keith Progin

Reported:  
08/04/22 16:34

Client Sample ID	Alternate Sample ID	Laboratory ID	Matrix	Date Sampled	Date Received
S-8A		2072917-23	Soil	07/29/22 13:15	07/29/22 16:35
S-8B		2072917-24	Soil	07/29/22 13:40	07/29/22 16:35
S-9		2072917-25	Soil	07/29/22 14:00	07/29/22 16:35
S-9A		2072917-26	Soil	07/29/22 13:55	07/29/22 16:35
S-9B		2072917-27	Soil	07/29/22 13:50	07/29/22 16:35
S-10		2072917-28	Soil	07/29/22 14:15	07/29/22 16:35
S-10A		2072917-29	Soil	07/29/22 14:05	07/29/22 16:35
S-10B		2072917-30	Soil	07/29/22 14:15	07/29/22 16:35



Rabecka Koons, Quality Assurance Officer

*The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report must be reproduced in its entirety.*

## Analytical Results

**Project: SAND LOT**

Project Number: 22470A  
Project Manager: Keith Progin

Reported:  
08/04/22 16:34

S-1

2072917-01 (Soil)  
Sample Date: 07/29/22

Analyte	Result	Notes	Units	Reporting Limit (MRL)	Detection Limit (LOD)	Dilution	Prepared	Analyzed	Analyst
<b>Semivolatile Organics by EPA 8270D (GC/MS) Prepared by 3540-GCMS(Soxhlet)</b>									
Acenaphthene	ND		ug/kg dry	190	190	2	08/01/22	08/02/22 15:02	EH
Acenaphthylene	ND		ug/kg dry	190	190	2	08/01/22	08/02/22 15:02	EH
Anthracene	ND		ug/kg dry	190	190	2	08/01/22	08/02/22 15:02	EH
Benzo[a]anthracene	ND		ug/kg dry	190	190	2	08/01/22	08/02/22 15:02	EH
<b>Benzo[b]fluoranthene</b>	<b>260</b>		ug/kg dry	190	190	2	08/01/22	08/02/22 15:02	EH
Benzo[k]fluoranthene	ND		ug/kg dry	190	190	2	08/01/22	08/02/22 15:02	EH
Benzo[g,h,i]perylene	ND		ug/kg dry	190	190	2	08/01/22	08/02/22 15:02	EH
Benzo[a]pyrene	ND		ug/kg dry	190	190	2	08/01/22	08/02/22 15:02	EH
Chrysene	ND		ug/kg dry	190	190	2	08/01/22	08/02/22 15:02	EH
Dibenz[a,h]anthracene	ND		ug/kg dry	190	190	2	08/01/22	08/02/22 15:02	EH
<b>Fluoranthene</b>	<b>200</b>		ug/kg dry	190	190	2	08/01/22	08/02/22 15:02	EH
Fluorene	ND		ug/kg dry	190	190	2	08/01/22	08/02/22 15:02	EH
Indeno[1,2,3-cd]pyrene	ND		ug/kg dry	190	190	2	08/01/22	08/02/22 15:02	EH
2-Methylnaphthalene	ND		ug/kg dry	190	190	2	08/01/22	08/02/22 15:02	EH
Naphthalene	ND		ug/kg dry	190	190	2	08/01/22	08/02/22 15:02	EH
Phenanthrene	ND		ug/kg dry	190	190	2	08/01/22	08/02/22 15:02	EH
<b>Pyrene</b>	<b>190</b>		ug/kg dry	190	190	2	08/01/22	08/02/22 15:02	EH
Surrogate: 2-Fluorophenol		23-121		69 %	08/01/22		08/02/22 15:02		
Surrogate: Phenol-d5		24-113		81 %	08/01/22		08/02/22 15:02		
Surrogate: Nitrobenzene-d5		23-120		82 %	08/01/22		08/02/22 15:02		
Surrogate: 2,4,6-Tribromophenol		19-122		85 %	08/01/22		08/02/22 15:02		
Surrogate: 2-Fluorobiphenyl		30-115		96 %	08/01/22		08/02/22 15:02		
Surrogate: Terphenyl-d14		18-137		102 %	08/01/22		08/02/22 15:02		
<b>PERCENT SOLIDS BY ASTM D2216-05 Prepared by Percent Solids</b>									
Percent Solids	86		%			1	08/01/22	08/02/22 09:45	LN

Rabecka Koons, Quality Assurance Officer

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report must be reproduced in its entirety.

All analyses performed at Maryland Spectral Services included in the report are TNI certified except as indicated at the end of the report

## Analytical Results

**Project: SAND LOT**

Project Number: 22470A  
Project Manager: Keith Progin

Reported:  
08/04/22 16:34

S-1

**2072917-01 (Soil)**  
**Sample Date: 07/29/22**

Analyte	Result	Notes	Units	Reporting Limit (MRL)	Detection Limit (LOD)	Dilution	Prepared	Analyzed	Analyst
<b>POLYCHLORINATED BIPHENYLS BY EPA 8082A (GC/ECD) Prepared by 3540-GC(Soxhlet) CIPestPCB</b>									
Aroclor-1016	ND		ug/kg dry	96.5	96.5	1	08/01/22	08/02/22 13:12	SJA
Aroclor-1221	ND		ug/kg dry	198	198	1	08/01/22	08/02/22 13:12	SJA
Aroclor-1232	ND		ug/kg dry	96.5	96.5	1	08/01/22	08/02/22 13:12	SJA
Aroclor-1242	ND		ug/kg dry	96.5	96.5	1	08/01/22	08/02/22 13:12	SJA
Aroclor-1248	ND		ug/kg dry	96.5	96.5	1	08/01/22	08/02/22 13:12	SJA
Aroclor-1254	ND		ug/kg dry	96.5	96.5	1	08/01/22	08/02/22 13:12	SJA
Aroclor-1260	ND		ug/kg dry	96.5	96.5	1	08/01/22	08/02/22 13:12	SJA
Aroclor-1262	ND		ug/kg dry	96.5	96.5	1	08/01/22	08/02/22 13:12	SJA
Aroclor-1268	ND		ug/kg dry	96.5	96.5	1	08/01/22	08/02/22 13:12	SJA
<i>Surrogate: Tetrachloro-m-xylene</i>			40-150	114 %	08/01/22		08/02/22 13:12		
<i>Surrogate: Decachlorobiphenyl</i>			40-150	105 %	08/01/22		08/02/22 13:12		
<b>Total Metals Analysis by EPA 6020B Prepared by 3050B-Metals Digestion</b>									
Antimony	ND		mg/kg dry	0.291	0.291	1	08/01/22	08/02/22 12:56	VVD
<b>Arsenic</b>	<b>4.45</b>		mg/kg dry	0.291	0.291	1	08/01/22	08/02/22 12:56	VVD
<b>Beryllium</b>	<b>1.38</b>		mg/kg dry	0.291	0.291	1	08/01/22	08/02/22 12:56	VVD
<b>Cadmium</b>	<b>0.573</b>		mg/kg dry	0.291	0.291	1	08/01/22	08/02/22 12:56	VVD
<b>Chromium</b>	<b>290</b>		mg/kg dry	2.91	2.91	10	08/01/22	08/02/22 14:01	VVD
<b>Copper</b>	<b>39.3</b>		mg/kg dry	0.291	0.291	1	08/01/22	08/02/22 12:56	VVD
<b>Lead</b>	<b>57.5</b>		mg/kg dry	0.291	0.291	1	08/01/22	08/02/22 12:56	VVD
<b>Manganese</b>	<b>11000</b>		mg/kg dry	29.1	29.1	100	08/01/22	08/02/22 14:46	VVD
<b>Mercury</b>	<b>0.0463</b>		mg/kg dry	0.0145	0.0145	1	08/01/22	08/02/22 12:56	VVD
<b>Nickel</b>	<b>20.0</b>		mg/kg dry	0.291	0.291	1	08/01/22	08/02/22 12:56	VVD
<b>Selenium</b>	<b>1.71</b>		mg/kg dry	0.291	0.291	1	08/01/22	08/02/22 12:56	VVD
Silver	ND		mg/kg dry	0.291	0.291	1	08/01/22	08/02/22 12:56	VVD
Thallium	ND		mg/kg dry	0.291	0.291	1	08/01/22	08/02/22 12:56	VVD
<b>Zinc</b>	<b>326</b>		mg/kg dry	14.5	14.5	10	08/01/22	08/02/22 14:01	VVD



Rabecka Koons, Quality Assurance Officer

*The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report must be reproduced in its entirety.*

All analyses performed at Maryland Spectral Services included in the report are TNI certified except as indicated at the end of the report

## Analytical Results

**Project: SAND LOT**

Project Number: 22470A  
Project Manager: Keith Progin

Reported:  
08/04/22 16:34

S-1

2072917-01 (Soil)  
Sample Date: 07/29/22

Analyte	Result	Notes	Units	Reporting Limit (MRL)	Detection Limit (LOD)	Dilution	Prepared	Analyzed	Analyst
<b>Hexavalent Chromium by EPA 7199 Prepared by 3060A-Hexavalent Chromium Digestion</b>									
Chromium, Hexavalent	ND		mg/kg dry	0.291	0.291	1	08/03/22	08/03/22 21:20	CRP



Rabecka Koons, Quality Assurance Officer

*The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report must be reproduced in its entirety.*

## Analytical Results

**Project: SAND LOT**

Project Number: 22470A  
Project Manager: Keith Progin

Reported:  
08/04/22 16:34

S-1A

2072917-02 (Soil)  
Sample Date: 07/29/22

Analyte	Result	Notes	Units	Reporting Limit (MRL)	Detection Limit (LOD)	Dilution	Prepared	Analyzed	Analyst
<b>DIESEL RANGE ORGANICS BY EPA 3540/8015C Prepared by 3540-GC(Soxhlet)</b>									
Diesel-Range Organics (C10-C28)	74.6		mg/kg dry	9.1	9.1	1	08/02/22	08/03/22 17:04	EH
Surrogate: o-Terphenyl			70-130	85 %	08/02/22		08/03/22 17:04		
<b>PERCENT SOLIDS BY ASTM D2216-05 Prepared by Percent Solids</b>									
Percent Solids	88		%			1	08/01/22	08/02/22 09:45	LN



Rabecka Koons, Quality Assurance Officer

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report must be reproduced in its entirety.

All analyses performed at Maryland Spectral Services included in the report are TNI certified except as indicated at the end of the report

## Analytical Results

**Project: SAND LOT**

Project Number: 22470A  
Project Manager: Keith Progin

Reported:  
08/04/22 16:34

**S-1B**

**2072917-03 (Soil)**  
**Sample Date: 07/29/22**

Analyte	Result	Notes	Units	Reporting Limit (MRL)	Detection Limit (LOD)	Dilution	Prepared	Analyzed	Analyst
<b>DIESEL RANGE ORGANICS BY EPA 3540/8015C Prepared by 3540-GC(Soxhlet)</b>									
<b>Diesel-Range Organics (C10-C28)</b>	<b>70.6</b>		mg/kg dry	9.2	9.2	1	08/02/22	08/03/22 17:31	EH
<i>Surrogate: o-Terphenyl</i>			70-130	93 %	08/02/22		08/03/22 17:31		
<b>PERCENT SOLIDS BY ASTM D2216-05 Prepared by Percent Solids</b>									
<b>Percent Solids</b>	<b>87</b>		%			1	08/01/22	08/02/22 09:45	LN



Rabecka Koons, Quality Assurance Officer

*The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report must be reproduced in its entirety.*

All analyses performed at Maryland Spectral Services included in the report are TNI certified except as indicated at the end of the report

## Analytical Results

**Project: SAND LOT**

Project Number: 22470A  
Project Manager: Keith Progin

Reported:  
08/04/22 16:34

S-2

2072917-04 (Soil)  
Sample Date: 07/29/22

Analyte	Result	Notes	Units	Reporting Limit (MRL)	Detection Limit (LOD)	Dilution	Prepared	Analyzed	Analyst
<b>Semivolatile Organics by EPA 8270D (GC/MS) Prepared by 3540-GCMS(Soxhlet)</b>									
Acenaphthene	ND		ug/kg dry	94	94	1	08/01/22	08/02/22 15:22	EH
Acenaphthylene	ND		ug/kg dry	94	94	1	08/01/22	08/02/22 15:22	EH
Anthracene	ND		ug/kg dry	94	94	1	08/01/22	08/02/22 15:22	EH
<b>Benzo[a]anthracene</b>	<b>94</b>		ug/kg dry	94	94	1	08/01/22	08/02/22 15:22	EH
<b>Benzo[b]fluoranthene</b>	<b>150</b>		ug/kg dry	94	94	1	08/01/22	08/02/22 15:22	EH
Benzo[k]fluoranthene	ND		ug/kg dry	94	94	1	08/01/22	08/02/22 15:22	EH
Benzo[g,h,i]perylene	ND		ug/kg dry	94	94	1	08/01/22	08/02/22 15:22	EH
<b>Benzo[a]pyrene</b>	<b>110</b>		ug/kg dry	94	94	1	08/01/22	08/02/22 15:22	EH
<b>Chrysene</b>	<b>110</b>		ug/kg dry	94	94	1	08/01/22	08/02/22 15:22	EH
Dibenz[a,h]anthracene	ND		ug/kg dry	94	94	1	08/01/22	08/02/22 15:22	EH
<b>Fluoranthene</b>	<b>170</b>		ug/kg dry	94	94	1	08/01/22	08/02/22 15:22	EH
Fluorene	ND		ug/kg dry	94	94	1	08/01/22	08/02/22 15:22	EH
<b>Indeno[1,2,3-cd]pyrene</b>	<b>100</b>		ug/kg dry	94	94	1	08/01/22	08/02/22 15:22	EH
2-Methylnaphthalene	ND		ug/kg dry	94	94	1	08/01/22	08/02/22 15:22	EH
Naphthalene	ND		ug/kg dry	94	94	1	08/01/22	08/02/22 15:22	EH
Phenanthrene	ND		ug/kg dry	94	94	1	08/01/22	08/02/22 15:22	EH
<b>Pyrene</b>	<b>150</b>		ug/kg dry	94	94	1	08/01/22	08/02/22 15:22	EH
Surrogate: 2-Fluorophenol		23-121		69 %	08/01/22		08/02/22 15:22		
Surrogate: Phenol-d5		24-113		75 %	08/01/22		08/02/22 15:22		
Surrogate: Nitrobenzene-d5		23-120		71 %	08/01/22		08/02/22 15:22		
Surrogate: 2,4,6-Tribromophenol		19-122		91 %	08/01/22		08/02/22 15:22		
Surrogate: 2-Fluorobiphenyl		30-115		82 %	08/01/22		08/02/22 15:22		
Surrogate: Terphenyl-d14		18-137		85 %	08/01/22		08/02/22 15:22		
<b>PERCENT SOLIDS BY ASTM D2216-05 Prepared by Percent Solids</b>									
<b>Percent Solids</b>	<b>85</b>		%			1	08/01/22	08/02/22 09:45	LN

Rabecka Koons, Quality Assurance Officer

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report must be reproduced in its entirety.

All analyses performed at Maryland Spectral Services included in the report are TNI certified except as indicated at the end of the report

## Analytical Results

**Project: SAND LOT**

Project Number: 22470A  
Project Manager: Keith Progin

Reported:  
08/04/22 16:34

S-2

2072917-04 (Soil)  
Sample Date: 07/29/22

Analyte	Result	Notes	Units	Reporting Limit (MRL)	Detection Limit (LOD)	Dilution	Prepared	Analyzed	Analyst
<b>POLYCHLORINATED BIPHENYLS BY EPA 8082A (GC/ECD) Prepared by 3540-GC(Soxhlet) CIPestPCB</b>									
Aroclor-1016	ND		ug/kg dry	97.6	97.6	1	08/01/22	08/02/22 13:27	SJA
Aroclor-1221	ND		ug/kg dry	200	200	1	08/01/22	08/02/22 13:27	SJA
Aroclor-1232	ND		ug/kg dry	97.6	97.6	1	08/01/22	08/02/22 13:27	SJA
Aroclor-1242	ND		ug/kg dry	97.6	97.6	1	08/01/22	08/02/22 13:27	SJA
Aroclor-1248	ND		ug/kg dry	97.6	97.6	1	08/01/22	08/02/22 13:27	SJA
Aroclor-1254	ND		ug/kg dry	97.6	97.6	1	08/01/22	08/02/22 13:27	SJA
Aroclor-1260	ND		ug/kg dry	97.6	97.6	1	08/01/22	08/02/22 13:27	SJA
Aroclor-1262	ND		ug/kg dry	97.6	97.6	1	08/01/22	08/02/22 13:27	SJA
Aroclor-1268	ND		ug/kg dry	97.6	97.6	1	08/01/22	08/02/22 13:27	SJA
<i>Surrogate: Tetrachloro-m-xylene</i>			40-150	106 %	08/01/22		08/02/22 13:27		
<i>Surrogate: Decachlorobiphenyl</i>			40-150	104 %	08/01/22		08/02/22 13:27		
<b>Total Metals Analysis by EPA 6020B Prepared by 3050B-Metals Digestion</b>									
Antimony	0.398		mg/kg dry	0.294	0.294	1	08/01/22	08/02/22 12:59	VVD
Arsenic	5.63		mg/kg dry	0.294	0.294	1	08/01/22	08/02/22 12:59	VVD
Beryllium	0.522		mg/kg dry	0.294	0.294	1	08/01/22	08/02/22 12:59	VVD
Cadmium	0.745		mg/kg dry	0.294	0.294	1	08/01/22	08/02/22 12:59	VVD
Chromium	42.6		mg/kg dry	0.294	0.294	1	08/01/22	08/02/22 12:59	VVD
Copper	29.6		mg/kg dry	0.294	0.294	1	08/01/22	08/02/22 12:59	VVD
Lead	98.2		mg/kg dry	0.294	0.294	1	08/01/22	08/02/22 12:59	VVD
Manganese	744		mg/kg dry	2.94	2.94	10	08/01/22	08/02/22 14:03	VVD
Mercury	0.502		mg/kg dry	0.0147	0.0147	1	08/01/22	08/02/22 12:59	VVD
Nickel	15.4		mg/kg dry	0.294	0.294	1	08/01/22	08/02/22 12:59	VVD
Selenium	1.29		mg/kg dry	0.294	0.294	1	08/01/22	08/02/22 12:59	VVD
Silver	ND		mg/kg dry	0.294	0.294	1	08/01/22	08/02/22 12:59	VVD
Thallium	ND		mg/kg dry	0.294	0.294	1	08/01/22	08/02/22 12:59	VVD
Zinc	289		mg/kg dry	14.7	14.7	10	08/01/22	08/02/22 14:03	VVD

Rabecka Koons, Quality Assurance Officer

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report must be reproduced in its entirety.

All analyses performed at Maryland Spectral Services included in the report are TNI certified except as indicated at the end of the report



## Analytical Results

**Project: SAND LOT**

Project Number: 22470A  
Project Manager: Keith Progin

Reported:  
08/04/22 16:34

S-2

2072917-04 (Soil)  
Sample Date: 07/29/22

Analyte	Result	Notes	Units	Reporting Limit (MRL)	Detection Limit (LOD)	Dilution	Prepared	Analyzed	Analyst
<b>Hexavalent Chromium by EPA 7199 Prepared by 3060A-Hexavalent Chromium Digestion</b>									
Chromium, Hexavalent	ND		mg/kg dry	0.294	0.294	1	08/03/22	08/03/22 21:38	CRP



Rabecka Koons, Quality Assurance Officer

*The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report must be reproduced in its entirety.*

All analyses performed at Maryland Spectral Services included in the report are TNI certified except as indicated at the end of the report

## Analytical Results

**Project: SAND LOT**

Project Number: 22470A  
Project Manager: Keith Progin

Reported:  
08/04/22 16:34

S-2A

2072917-05 (Soil)  
Sample Date: 07/29/22

Analyte	Result	Notes	Units	Reporting Limit (MRL)	Detection Limit (LOD)	Dilution	Prepared	Analyzed	Analyst
<b>DIESEL RANGE ORGANICS BY EPA 3540/8015C Prepared by 3540-GC(Soxhlet)</b>									
<b>Diesel-Range Organics (C10-C28)</b>	<b>73.2</b>		mg/kg dry	9.2	9.2	1	08/02/22	08/03/22 18:24	EH
<i>Surrogate: o-Terphenyl</i>			70-130	91 %	08/02/22		08/03/22 18:24		
<b>PERCENT SOLIDS BY ASTM D2216-05 Prepared by Percent Solids</b>									
<b>Percent Solids</b>	<b>87</b>		%			1	08/01/22	08/02/22 09:45	LN



Rabecka Koons, Quality Assurance Officer

*The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report must be reproduced in its entirety.*

All analyses performed at Maryland Spectral Services included in the report are TNI certified except as indicated at the end of the report

## Analytical Results

**Project: SAND LOT**

Project Number: 22470A  
Project Manager: Keith Progin

Reported:  
08/04/22 16:34

S-2B

2072917-06 (Soil)  
Sample Date: 07/29/22

Analyte	Result	Notes	Units	Reporting Limit (MRL)	Detection Limit (LOD)	Dilution	Prepared	Analyzed	Analyst
<b>DIESEL RANGE ORGANICS BY EPA 3540/8015C Prepared by 3540-GC(Soxhlet)</b>									
Diesel-Range Organics (C10-C28)	42.0		mg/kg dry	10.0	10.0	1	08/02/22	08/03/22 18:50	EH
Surrogate: o-Terphenyl		70-130		83 %	08/02/22		08/03/22 18:50		
<b>PERCENT SOLIDS BY ASTM D2216-05 Prepared by Percent Solids</b>									
Percent Solids	80		%			1	08/01/22	08/02/22 09:45	LN



Rabecka Koons, Quality Assurance Officer

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report must be reproduced in its entirety.

## Analytical Results

**Project: SAND LOT**

Project Number: 22470A  
Project Manager: Keith Progin

Reported:  
08/04/22 16:34

S-3

2072917-07 (Soil)  
Sample Date: 07/29/22

Analyte	Result	Notes	Units	Reporting Limit (MRL)	Detection Limit (LOD)	Dilution	Prepared	Analyzed	Analyst
<b>Semivolatile Organics by EPA 8270D (GC/MS) Prepared by 3540-GCMS(Soxhlet)</b>									
Acenaphthene	ND		ug/kg dry	89	89	1	08/01/22	08/02/22 15:43	EH
Acenaphthylene	ND		ug/kg dry	89	89	1	08/01/22	08/02/22 15:43	EH
Anthracene	ND		ug/kg dry	89	89	1	08/01/22	08/02/22 15:43	EH
Benzo[a]anthracene	ND		ug/kg dry	89	89	1	08/01/22	08/02/22 15:43	EH
Benzo[b]fluoranthene	ND		ug/kg dry	89	89	1	08/01/22	08/02/22 15:43	EH
Benzo[k]fluoranthene	ND		ug/kg dry	89	89	1	08/01/22	08/02/22 15:43	EH
Benzo[g,h,i]perylene	ND		ug/kg dry	89	89	1	08/01/22	08/02/22 15:43	EH
Benzo[a]pyrene	ND		ug/kg dry	89	89	1	08/01/22	08/02/22 15:43	EH
Chrysene	ND		ug/kg dry	89	89	1	08/01/22	08/02/22 15:43	EH
Dibenz[a,h]anthracene	ND		ug/kg dry	89	89	1	08/01/22	08/02/22 15:43	EH
Fluoranthene	ND		ug/kg dry	89	89	1	08/01/22	08/02/22 15:43	EH
Fluorene	ND		ug/kg dry	89	89	1	08/01/22	08/02/22 15:43	EH
Indeno[1,2,3-cd]pyrene	ND		ug/kg dry	89	89	1	08/01/22	08/02/22 15:43	EH
2-Methylnaphthalene	ND		ug/kg dry	89	89	1	08/01/22	08/02/22 15:43	EH
Naphthalene	ND		ug/kg dry	89	89	1	08/01/22	08/02/22 15:43	EH
Phenanthrene	ND		ug/kg dry	89	89	1	08/01/22	08/02/22 15:43	EH
Pyrene	ND		ug/kg dry	89	89	1	08/01/22	08/02/22 15:43	EH
Surrogate: 2-Fluorophenol		23-121		67 %	08/01/22		08/02/22 15:43		
Surrogate: Phenol-d5		24-113		72 %	08/01/22		08/02/22 15:43		
Surrogate: Nitrobenzene-d5		23-120		67 %	08/01/22		08/02/22 15:43		
Surrogate: 2,4,6-Tribromophenol		19-122		88 %	08/01/22		08/02/22 15:43		
Surrogate: 2-Fluorobiphenyl		30-115		79 %	08/01/22		08/02/22 15:43		
Surrogate: Terphenyl-d14		18-137		86 %	08/01/22		08/02/22 15:43		
<b>PERCENT SOLIDS BY ASTM D2216-05 Prepared by Percent Solids</b>									
Percent Solids	90		%			1	08/01/22	08/02/22 09:45	LN

Rabecka Koons, Quality Assurance Officer

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report must be reproduced in its entirety.

All analyses performed at Maryland Spectral Services included in the report are TNI certified except as indicated at the end of the report

## Analytical Results

**Project: SAND LOT**

Project Number: 22470A  
Project Manager: Keith Progin

Reported:  
08/04/22 16:34

S-3

2072917-07 (Soil)  
Sample Date: 07/29/22

Analyte	Result	Notes	Units	Reporting Limit (MRL)	Detection Limit (LOD)	Dilution	Prepared	Analyzed	Analyst
<b>POLYCHLORINATED BIPHENYLS BY EPA 8082A (GC/ECD) Prepared by 3540-GC(Soxhlet) CIPestPCB</b>									
Aroclor-1016	ND		ug/kg dry	92.2	92.2	1	08/01/22	08/02/22 13:43	SJA
Aroclor-1221	ND		ug/kg dry	189	189	1	08/01/22	08/02/22 13:43	SJA
Aroclor-1232	ND		ug/kg dry	92.2	92.2	1	08/01/22	08/02/22 13:43	SJA
Aroclor-1242	ND		ug/kg dry	92.2	92.2	1	08/01/22	08/02/22 13:43	SJA
Aroclor-1248	ND		ug/kg dry	92.2	92.2	1	08/01/22	08/02/22 13:43	SJA
Aroclor-1254	ND		ug/kg dry	92.2	92.2	1	08/01/22	08/02/22 13:43	SJA
Aroclor-1260	ND		ug/kg dry	92.2	92.2	1	08/01/22	08/02/22 13:43	SJA
Aroclor-1262	ND		ug/kg dry	92.2	92.2	1	08/01/22	08/02/22 13:43	SJA
Aroclor-1268	ND		ug/kg dry	92.2	92.2	1	08/01/22	08/02/22 13:43	SJA
Surrogate: Tetrachloro-m-xylene		40-150		94 %	08/01/22		08/02/22 13:43		
Surrogate: Decachlorobiphenyl		40-150		92 %	08/01/22		08/02/22 13:43		
<b>Total Metals Analysis by EPA 6020B Prepared by 3050B-Metals Digestion</b>									
Antimony	ND		mg/kg dry	0.278	0.278	1	08/01/22	08/02/22 13:01	VVD
Arsenic	7.70		mg/kg dry	0.278	0.278	1	08/01/22	08/02/22 13:01	VVD
Beryllium	0.676		mg/kg dry	0.278	0.278	1	08/01/22	08/02/22 13:01	VVD
Cadmium	0.533		mg/kg dry	0.278	0.278	1	08/01/22	08/02/22 13:01	VVD
Chromium	34.1		mg/kg dry	0.278	0.278	1	08/01/22	08/02/22 13:01	VVD
Copper	26.3		mg/kg dry	0.278	0.278	1	08/01/22	08/02/22 13:01	VVD
Lead	77.5		mg/kg dry	0.278	0.278	1	08/01/22	08/02/22 13:01	VVD
Manganese	493		mg/kg dry	2.78	2.78	10	08/01/22	08/02/22 14:06	VVD
Mercury	2.55		mg/kg dry	0.139	0.139	10	08/01/22	08/02/22 14:06	VVD
Nickel	16.1		mg/kg dry	0.278	0.278	1	08/01/22	08/02/22 13:01	VVD
Selenium	1.80		mg/kg dry	0.278	0.278	1	08/01/22	08/02/22 13:01	VVD
Silver	ND		mg/kg dry	0.278	0.278	1	08/01/22	08/02/22 13:01	VVD
Thallium	ND		mg/kg dry	0.278	0.278	1	08/01/22	08/02/22 13:01	VVD
Zinc	207		mg/kg dry	1.39	1.39	1	08/01/22	08/02/22 13:01	VVD



Rabecka Koons, Quality Assurance Officer

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report must be reproduced in its entirety.

All analyses performed at Maryland Spectral Services included in the report are TNI certified except as indicated at the end of the report

## Analytical Results

**Project: SAND LOT**

Project Number: 22470A  
Project Manager: Keith Progin

Reported:  
08/04/22 16:34

S-3

2072917-07 (Soil)  
Sample Date: 07/29/22

Analyte	Result	Notes	Units	Reporting Limit (MRL)	Detection Limit (LOD)	Dilution	Prepared	Analyzed	Analyst
<b>Hexavalent Chromium by EPA 7199 Prepared by 3060A-Hexavalent Chromium Digestion</b>									
Chromium, Hexavalent	ND		mg/kg dry	0.278	0.278	1	08/03/22	08/03/22 21:56	CRP



Rabecka Koons, Quality Assurance Officer

*The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report must be reproduced in its entirety.*

All analyses performed at Maryland Spectral Services included in the report are TNI certified except as indicated at the end of the report

## Analytical Results

**Project: SAND LOT**

Project Number: 22470A  
Project Manager: Keith Progin

Reported:  
08/04/22 16:34

S-3A

2072917-08 (Soil)  
Sample Date: 07/29/22

Analyte	Result	Notes	Units	Reporting Limit (MRL)	Detection Limit (LOD)	Dilution	Prepared	Analyzed	Analyst
<b>DIESEL RANGE ORGANICS BY EPA 3540/8015C Prepared by 3540-GC(Soxhlet)</b>									
Diesel-Range Organics (C10-C28)	19.9		mg/kg dry	8.8	8.8	1	08/02/22	08/03/22 19:44	EH
Surrogate: o-Terphenyl		70-130		90 %	08/02/22		08/03/22 19:44		
<b>PERCENT SOLIDS BY ASTM D2216-05 Prepared by Percent Solids</b>									
Percent Solids	91		%			1	08/01/22	08/02/22 09:45	LN



Rabecka Koons, Quality Assurance Officer

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report must be reproduced in its entirety.

All analyses performed at Maryland Spectral Services included in the report are TNI certified except as indicated at the end of the report

## Analytical Results

**Project: SAND LOT**

Project Number: 22470A  
Project Manager: Keith Progin

Reported:  
08/04/22 16:34

**S-3B**

**2072917-09 (Soil)**  
**Sample Date: 07/29/22**

Analyte	Result	Notes	Units	Reporting Limit (MRL)	Detection Limit (LOD)	Dilution	Prepared	Analyzed	Analyst
<b>DIESEL RANGE ORGANICS BY EPA 3540/8015C Prepared by 3540-GC(Soxhlet)</b>									
Diesel-Range Organics (C10-C28)	ND		mg/kg dry	8.8	8.8	1	08/02/22	08/03/22 20:10	EH
Surrogate: <i>o</i> -Terphenyl			70-130	91 %	08/02/22		08/03/22 20:10		
<b>PERCENT SOLIDS BY ASTM D2216-05 Prepared by Percent Solids</b>									
Percent Solids	91		%			1	08/01/22	08/02/22 09:45	LN



Rabecka Koons, Quality Assurance Officer

*The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report must be reproduced in its entirety.*

All analyses performed at Maryland Spectral Services included in the report are TNI certified except as indicated at the end of the report



## Analytical Results

**Project: SAND LOT**

Project Number: 22470A  
Project Manager: Keith Progin

Reported:  
08/04/22 16:34

S-4

2072917-10 (Soil)  
Sample Date: 07/29/22

Analyte	Result	Notes	Units	Reporting Limit (MRL)	Detection Limit (LOD)	Dilution	Prepared	Analyzed	Analyst
<b>Semivolatile Organics by EPA 8270D (GC/MS) Prepared by 3540-GCMS(Soxhlet)</b>									
Acenaphthene	ND		ug/kg dry	92	92	1	08/01/22	08/02/22 16:04	EH
Acenaphthylene	ND		ug/kg dry	92	92	1	08/01/22	08/02/22 16:04	EH
Anthracene	ND		ug/kg dry	92	92	1	08/01/22	08/02/22 16:04	EH
Benzo[a]anthracene	ND		ug/kg dry	92	92	1	08/01/22	08/02/22 16:04	EH
Benzo[b]fluoranthene	ND		ug/kg dry	92	92	1	08/01/22	08/02/22 16:04	EH
Benzo[k]fluoranthene	ND		ug/kg dry	92	92	1	08/01/22	08/02/22 16:04	EH
Benzo[g,h,i]perylene	ND		ug/kg dry	92	92	1	08/01/22	08/02/22 16:04	EH
Benzo[a]pyrene	ND		ug/kg dry	92	92	1	08/01/22	08/02/22 16:04	EH
Chrysene	ND		ug/kg dry	92	92	1	08/01/22	08/02/22 16:04	EH
Dibenz[a,h]anthracene	ND		ug/kg dry	92	92	1	08/01/22	08/02/22 16:04	EH
Fluoranthene	ND		ug/kg dry	92	92	1	08/01/22	08/02/22 16:04	EH
Fluorene	ND		ug/kg dry	92	92	1	08/01/22	08/02/22 16:04	EH
Indeno[1,2,3-cd]pyrene	ND		ug/kg dry	92	92	1	08/01/22	08/02/22 16:04	EH
2-Methylnaphthalene	ND		ug/kg dry	92	92	1	08/01/22	08/02/22 16:04	EH
Naphthalene	ND		ug/kg dry	92	92	1	08/01/22	08/02/22 16:04	EH
Phenanthrene	ND		ug/kg dry	92	92	1	08/01/22	08/02/22 16:04	EH
Pyrene	ND		ug/kg dry	92	92	1	08/01/22	08/02/22 16:04	EH
Surrogate: 2-Fluorophenol		23-121		70 %	08/01/22		08/02/22 16:04		
Surrogate: Phenol-d5		24-113		75 %	08/01/22		08/02/22 16:04		
Surrogate: Nitrobenzene-d5		23-120		74 %	08/01/22		08/02/22 16:04		
Surrogate: 2,4,6-Tribromophenol		19-122		87 %	08/01/22		08/02/22 16:04		
Surrogate: 2-Fluorobiphenyl		30-115		85 %	08/01/22		08/02/22 16:04		
Surrogate: Terphenyl-d14		18-137		90 %	08/01/22		08/02/22 16:04		
<b>PERCENT SOLIDS BY ASTM D2216-05 Prepared by Percent Solids</b>									
Percent Solids	87		%			1	08/01/22	08/02/22 09:45	LN

Rabecka Koons, Quality Assurance Officer

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report must be reproduced in its entirety.

All analyses performed at Maryland Spectral Services included in the report are TNI certified except as indicated at the end of the report

## Analytical Results

**Project: SAND LOT**

Project Number: 22470A  
Project Manager: Keith Progin

Reported:  
08/04/22 16:34

S-4

**2072917-10 (Soil)**  
**Sample Date: 07/29/22**

Analyte	Result	Notes	Units	Reporting Limit (MRL)	Detection Limit (LOD)	Dilution	Prepared	Analyzed	Analyst
<b>POLYCHLORINATED BIPHENYLS BY EPA 8082A (GC/ECD) Prepared by 3540-GC(Soxhlet) CIPestPCB</b>									
Aroclor-1016	ND		ug/kg dry	95.4	95.4	1	08/01/22	08/02/22 13:58	SJA
Aroclor-1221	ND		ug/kg dry	195	195	1	08/01/22	08/02/22 13:58	SJA
Aroclor-1232	ND		ug/kg dry	95.4	95.4	1	08/01/22	08/02/22 13:58	SJA
Aroclor-1242	ND		ug/kg dry	95.4	95.4	1	08/01/22	08/02/22 13:58	SJA
Aroclor-1248	ND		ug/kg dry	95.4	95.4	1	08/01/22	08/02/22 13:58	SJA
Aroclor-1254	ND		ug/kg dry	95.4	95.4	1	08/01/22	08/02/22 13:58	SJA
Aroclor-1260	ND		ug/kg dry	95.4	95.4	1	08/01/22	08/02/22 13:58	SJA
Aroclor-1262	ND		ug/kg dry	95.4	95.4	1	08/01/22	08/02/22 13:58	SJA
Aroclor-1268	ND		ug/kg dry	95.4	95.4	1	08/01/22	08/02/22 13:58	SJA
<i>Surrogate: Tetrachloro-m-xylene</i>			40-150	105 %	08/01/22		08/02/22 13:58		
<i>Surrogate: Decachlorobiphenyl</i>			40-150	99 %	08/01/22		08/02/22 13:58		
<b>Total Metals Analysis by EPA 6020B Prepared by 3050B-Metals Digestion</b>									
Antimony	ND		mg/kg dry	0.287	0.287	1	08/01/22	08/02/22 13:08	VVD
<b>Arsenic</b>	<b>5.92</b>		mg/kg dry	0.287	0.287	1	08/01/22	08/02/22 13:08	VVD
<b>Beryllium</b>	<b>0.656</b>		mg/kg dry	0.287	0.287	1	08/01/22	08/02/22 13:08	VVD
<b>Cadmium</b>	<b>0.625</b>		mg/kg dry	0.287	0.287	1	08/01/22	08/02/22 13:08	VVD
<b>Chromium</b>	<b>36.0</b>		mg/kg dry	0.287	0.287	1	08/01/22	08/02/22 13:08	VVD
<b>Copper</b>	<b>27.5</b>		mg/kg dry	0.287	0.287	1	08/01/22	08/02/22 13:08	VVD
<b>Lead</b>	<b>77.7</b>		mg/kg dry	0.287	0.287	1	08/01/22	08/02/22 13:08	VVD
<b>Manganese</b>	<b>828</b>		mg/kg dry	2.87	2.87	10	08/01/22	08/02/22 14:13	VVD
<b>Mercury</b>	<b>0.325</b>		mg/kg dry	0.0144	0.0144	1	08/01/22	08/02/22 13:08	VVD
<b>Nickel</b>	<b>18.7</b>		mg/kg dry	0.287	0.287	1	08/01/22	08/02/22 13:08	VVD
<b>Selenium</b>	<b>1.62</b>		mg/kg dry	0.287	0.287	1	08/01/22	08/02/22 13:08	VVD
Silver	ND		mg/kg dry	0.287	0.287	1	08/01/22	08/02/22 13:08	VVD
Thallium	ND		mg/kg dry	0.287	0.287	1	08/01/22	08/02/22 13:08	VVD
<b>Zinc</b>	<b>225</b>		mg/kg dry	1.44	1.44	1	08/01/22	08/02/22 13:08	VVD



Rabecka Koons, Quality Assurance Officer

*The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report must be reproduced in its entirety.*

All analyses performed at Maryland Spectral Services included in the report are TNI certified except as indicated at the end of the report

## Analytical Results

**Project: SAND LOT**

Project Number: 22470A  
Project Manager: Keith Progin

**Reported:**  
08/04/22 16:34

S-4

**2072917-10 (Soil)**  
**Sample Date: 07/29/22**

Analyte	Result	Notes	Units	Reporting Limit (MRL)	Detection Limit (LOD)	Dilution	Prepared	Analyzed	Analyst
<b>Hexavalent Chromium by EPA 7199 Prepared by 3060A-Hexavalent Chromium Digestion</b>									
Chromium, Hexavalent	ND		mg/kg dry	0.287	0.287	1	08/03/22	08/03/22 22:13	CRP



Rabecka Koons, Quality Assurance Officer

*The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report must be reproduced in its entirety.*

**Analytical Results**

**Project: SAND LOT**

Project Number: 22470A  
Project Manager: Keith Progin

Reported:  
08/04/22 16:34

S-4A

2072917-11 (Soil)  
Sample Date: 07/29/22

Analyte	Result	Notes	Units	Reporting Limit (MRL)	Detection Limit (LOD)	Dilution	Prepared	Analyzed	Analyst
<b>DIESEL RANGE ORGANICS BY EPA 3540/8015C Prepared by 3540-GC(Soxhlet)</b>									
<b>Diesel-Range Organics (C10-C28)</b>	<b>10.4</b>		mg/kg dry	9.2	9.2	1	08/01/22	08/02/22 14:16	EH
<i>Surrogate: o-Terphenyl</i>			70-130	96 %	08/01/22		08/02/22 14:16		
<b>PERCENT SOLIDS BY ASTM D2216-05 Prepared by Percent Solids</b>									
<b>Percent Solids</b>	<b>87</b>		%			1	08/01/22	08/02/22 09:45	LN

Rabecka Koons, Quality Assurance Officer

*The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report must be reproduced in its entirety.*

All analyses performed at Maryland Spectral Services included in the report are TNI certified except as indicated at the end of the report

## Analytical Results

**Project: SAND LOT**

Project Number: 22470A  
Project Manager: Keith Progin

Reported:  
08/04/22 16:34

**S-4B**

**2072917-12 (Soil)**  
**Sample Date: 07/29/22**

Analyte	Result	Notes	Units	Reporting Limit (MRL)	Detection Limit (LOD)	Dilution	Prepared	Analyzed	Analyst
<b>DIESEL RANGE ORGANICS BY EPA 3540/8015C Prepared by 3540-GC(Soxhlet)</b>									
Diesel-Range Organics (C10-C28)	ND		mg/kg dry	9.1	9.1	1	08/01/22	08/02/22 14:42	EH
Surrogate: <i>o</i> -Terphenyl			70-130	90 %	08/01/22		08/02/22 14:42		
<b>PERCENT SOLIDS BY ASTM D2216-05 Prepared by Percent Solids</b>									
Percent Solids	88		%			1	08/01/22	08/02/22 09:45	LN



Rabecka Koons, Quality Assurance Officer

*The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report must be reproduced in its entirety.*

All analyses performed at Maryland Spectral Services included in the report are TNI certified except as indicated at the end of the report

## Analytical Results

**Project: SAND LOT**

Project Number: 22470A  
Project Manager: Keith Progin

Reported:  
08/04/22 16:34

S-5

2072917-13 (Soil)  
Sample Date: 07/29/22

Analyte	Result	Notes	Units	Reporting Limit (MRL)	Detection Limit (LOD)	Dilution	Prepared	Analyzed	Analyst
<b>Semivolatile Organics by EPA 8270D (GC/MS) Prepared by 3540-GCMS(Soxhlet)</b>									
Acenaphthene	ND		ug/kg dry	93	93	1	08/01/22	08/02/22 16:24	EH
Acenaphthylene	ND		ug/kg dry	93	93	1	08/01/22	08/02/22 16:24	EH
Anthracene	ND		ug/kg dry	93	93	1	08/01/22	08/02/22 16:24	EH
Benzo[a]anthracene	ND		ug/kg dry	93	93	1	08/01/22	08/02/22 16:24	EH
Benzo[b]fluoranthene	ND		ug/kg dry	93	93	1	08/01/22	08/02/22 16:24	EH
Benzo[k]fluoranthene	ND		ug/kg dry	93	93	1	08/01/22	08/02/22 16:24	EH
Benzo[g,h,i]perylene	ND		ug/kg dry	93	93	1	08/01/22	08/02/22 16:24	EH
Benzo[a]pyrene	ND		ug/kg dry	93	93	1	08/01/22	08/02/22 16:24	EH
Chrysene	ND		ug/kg dry	93	93	1	08/01/22	08/02/22 16:24	EH
Dibenz[a,h]anthracene	ND		ug/kg dry	93	93	1	08/01/22	08/02/22 16:24	EH
Fluoranthene	ND		ug/kg dry	93	93	1	08/01/22	08/02/22 16:24	EH
Fluorene	ND		ug/kg dry	93	93	1	08/01/22	08/02/22 16:24	EH
Indeno[1,2,3-cd]pyrene	ND		ug/kg dry	93	93	1	08/01/22	08/02/22 16:24	EH
2-Methylnaphthalene	ND		ug/kg dry	93	93	1	08/01/22	08/02/22 16:24	EH
Naphthalene	ND		ug/kg dry	93	93	1	08/01/22	08/02/22 16:24	EH
Phenanthrene	ND		ug/kg dry	93	93	1	08/01/22	08/02/22 16:24	EH
Pyrene	ND		ug/kg dry	93	93	1	08/01/22	08/02/22 16:24	EH
Surrogate: 2-Fluorophenol			23-121	68 %	08/01/22		08/02/22 16:24		
Surrogate: Phenol-d5			24-113	72 %	08/01/22		08/02/22 16:24		
Surrogate: Nitrobenzene-d5			23-120	66 %	08/01/22		08/02/22 16:24		
Surrogate: 2,4,6-Tribromophenol			19-122	86 %	08/01/22		08/02/22 16:24		
Surrogate: 2-Fluorobiphenyl			30-115	77 %	08/01/22		08/02/22 16:24		
Surrogate: Terphenyl-d14			18-137	85 %	08/01/22		08/02/22 16:24		
<b>PERCENT SOLIDS BY ASTM D2216-05 Prepared by Percent Solids</b>									
Percent Solids	86		%			1	08/01/22	08/02/22 09:45	LN



Rabecka Koons, Quality Assurance Officer

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report must be reproduced in its entirety.

All analyses performed at Maryland Spectral Services included in the report are TNI certified except as indicated at the end of the report



## Analytical Results

**Project: SAND LOT**

Project Number: 22470A  
Project Manager: Keith Progin

Reported:  
08/04/22 16:34

S-5

2072917-13 (Soil)  
Sample Date: 07/29/22

Analyte	Result	Notes	Units	Reporting Limit (MRL)	Detection Limit (LOD)	Dilution	Prepared	Analyzed	Analyst
<b>POLYCHLORINATED BIPHENYLS BY EPA 8082A (GC/ECD) Prepared by 3540-GC(Soxhlet) CIPestPCB</b>									
Aroclor-1016	ND		ug/kg dry	96.5	96.5	1	08/01/22	08/02/22 14:14	SJA
Aroclor-1221	ND		ug/kg dry	198	198	1	08/01/22	08/02/22 14:14	SJA
Aroclor-1232	ND		ug/kg dry	96.5	96.5	1	08/01/22	08/02/22 14:14	SJA
Aroclor-1242	ND		ug/kg dry	96.5	96.5	1	08/01/22	08/02/22 14:14	SJA
Aroclor-1248	ND		ug/kg dry	96.5	96.5	1	08/01/22	08/02/22 14:14	SJA
Aroclor-1254	ND		ug/kg dry	96.5	96.5	1	08/01/22	08/02/22 14:14	SJA
Aroclor-1260	ND		ug/kg dry	96.5	96.5	1	08/01/22	08/02/22 14:14	SJA
Aroclor-1262	ND		ug/kg dry	96.5	96.5	1	08/01/22	08/02/22 14:14	SJA
Aroclor-1268	ND		ug/kg dry	96.5	96.5	1	08/01/22	08/02/22 14:14	SJA
<i>Surrogate: Tetrachloro-m-xylene</i>			40-150	103 %	08/01/22		08/02/22 14:14		
<i>Surrogate: Decachlorobiphenyl</i>			40-150	96 %	08/01/22		08/02/22 14:14		
<b>Total Metals Analysis by EPA 6020B Prepared by 3050B-Metals Digestion</b>									
Antimony	ND		mg/kg dry	0.291	0.291	1	08/01/22	08/02/22 13:11	VVD
<b>Arsenic</b>	<b>7.00</b>		mg/kg dry	0.291	0.291	1	08/01/22	08/02/22 13:11	VVD
<b>Beryllium</b>	<b>0.461</b>		mg/kg dry	0.291	0.291	1	08/01/22	08/02/22 13:11	VVD
<b>Cadmium</b>	<b>0.338</b>		mg/kg dry	0.291	0.291	1	08/01/22	08/02/22 13:11	VVD
<b>Chromium</b>	<b>26.0</b>		mg/kg dry	0.291	0.291	1	08/01/22	08/02/22 13:11	VVD
<b>Copper</b>	<b>17.7</b>		mg/kg dry	0.291	0.291	1	08/01/22	08/02/22 13:11	VVD
<b>Lead</b>	<b>44.8</b>		mg/kg dry	0.291	0.291	1	08/01/22	08/02/22 13:11	VVD
<b>Manganese</b>	<b>380</b>		mg/kg dry	2.91	2.91	10	08/01/22	08/02/22 14:15	VVD
<b>Mercury</b>	<b>0.309</b>		mg/kg dry	0.0145	0.0145	1	08/01/22	08/02/22 13:11	VVD
<b>Nickel</b>	<b>12.7</b>		mg/kg dry	0.291	0.291	1	08/01/22	08/02/22 13:11	VVD
<b>Selenium</b>	<b>1.38</b>		mg/kg dry	0.291	0.291	1	08/01/22	08/02/22 13:11	VVD
Silver	ND		mg/kg dry	0.291	0.291	1	08/01/22	08/02/22 13:11	VVD
Thallium	ND		mg/kg dry	0.291	0.291	1	08/01/22	08/02/22 13:11	VVD
<b>Zinc</b>	<b>130</b>		mg/kg dry	1.45	1.45	1	08/01/22	08/02/22 13:11	VVD



Rabecka Koons, Quality Assurance Officer

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report must be reproduced in its entirety.

All analyses performed at Maryland Spectral Services included in the report are TNI certified except as indicated at the end of the report

## Analytical Results

**Project: SAND LOT**

Project Number: 22470A  
Project Manager: Keith Progin

Reported:  
08/04/22 16:34

S-5

**2072917-13 (Soil)**  
**Sample Date: 07/29/22**

Analyte	Result	Notes	Units	Reporting Limit (MRL)	Detection Limit (LOD)	Dilution	Prepared	Analyzed	Analyst
<b>Hexavalent Chromium by EPA 7199 Prepared by 3060A-Hexavalent Chromium Digestion</b>									
Chromium, Hexavalent	ND		mg/kg dry	0.291	0.291	1	08/03/22	08/03/22 22:31	CRP



Rabecka Koons, Quality Assurance Officer

*The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report must be reproduced in its entirety.*

## Analytical Results

**Project: SAND LOT**

Project Number: 22470A  
Project Manager: Keith Progin

Reported:  
08/04/22 16:34

S-5A

2072917-14 (Soil)  
Sample Date: 07/29/22

Analyte	Result	Notes	Units	Reporting Limit (MRL)	Detection Limit (LOD)	Dilution	Prepared	Analyzed	Analyst
<b>DIESEL RANGE ORGANICS BY EPA 3540/8015C Prepared by 3540-GC(Soxhlet)</b>									
<b>Diesel-Range Organics (C10-C28)</b>	<b>12.2</b>		mg/kg dry	9.2	9.2	1	08/01/22	08/02/22 15:36	EH
<i>Surrogate: o-Terphenyl</i>			70-130	93 %	08/01/22		08/02/22 15:36		
<b>PERCENT SOLIDS BY ASTM D2216-05 Prepared by Percent Solids</b>									
<b>Percent Solids</b>	<b>87</b>		%			1	08/01/22	08/02/22 09:45	LN

Rabecka Koons, Quality Assurance Officer

*The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report must be reproduced in its entirety.*

All analyses performed at Maryland Spectral Services included in the report are TNI certified except as indicated at the end of the report

## Analytical Results

**Project: SAND LOT**

Project Number: 22470A  
Project Manager: Keith Progin

Reported:  
08/04/22 16:34

**S-5B**

**2072917-15 (Soil)**  
**Sample Date: 07/29/22**

Analyte	Result	Notes	Units	Reporting Limit (MRL)	Detection Limit (LOD)	Dilution	Prepared	Analyzed	Analyst
<b>DIESEL RANGE ORGANICS BY EPA 3540/8015C Prepared by 3540-GC(Soxhlet)</b>									
Diesel-Range Organics (C10-C28)	ND		mg/kg dry	9.2	9.2	1	08/01/22	08/02/22 16:03	EH
Surrogate: <i>o</i> -Terphenyl			70-130	94 %	08/01/22		08/02/22 16:03		
<b>PERCENT SOLIDS BY ASTM D2216-05 Prepared by Percent Solids</b>									
Percent Solids	87		%			1	08/01/22	08/02/22 09:45	LN



Rabecka Koons, Quality Assurance Officer

*The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report must be reproduced in its entirety.*

All analyses performed at Maryland Spectral Services included in the report are TNI certified except as indicated at the end of the report

## Analytical Results

**Project: SAND LOT**

Project Number: 22470A  
Project Manager: Keith Progin

Reported:  
08/04/22 16:34

S-6

2072917-16 (Soil)  
Sample Date: 07/29/22

Analyte	Result	Notes	Units	Reporting Limit (MRL)	Detection Limit (LOD)	Dilution	Prepared	Analyzed	Analyst
<b>Semivolatile Organics by EPA 8270D (GC/MS) Prepared by 3540-GCMS(Soxhlet)</b>									
Acenaphthene	ND		ug/kg dry	88	88	1	08/01/22	08/02/22 16:45	EH
Acenaphthylene	ND		ug/kg dry	88	88	1	08/01/22	08/02/22 16:45	EH
Anthracene	ND		ug/kg dry	88	88	1	08/01/22	08/02/22 16:45	EH
Benzo[a]anthracene	ND		ug/kg dry	88	88	1	08/01/22	08/02/22 16:45	EH
<b>Benzo[b]fluoranthene</b>	<b>88</b>		ug/kg dry	88	88	1	08/01/22	08/02/22 16:45	EH
Benzo[k]fluoranthene	ND		ug/kg dry	88	88	1	08/01/22	08/02/22 16:45	EH
Benzo[g,h,i]perylene	ND		ug/kg dry	88	88	1	08/01/22	08/02/22 16:45	EH
Benzo[a]pyrene	ND		ug/kg dry	88	88	1	08/01/22	08/02/22 16:45	EH
Chrysene	ND		ug/kg dry	88	88	1	08/01/22	08/02/22 16:45	EH
Dibenz[a,h]anthracene	ND		ug/kg dry	88	88	1	08/01/22	08/02/22 16:45	EH
<b>Fluoranthene</b>	<b>100</b>		ug/kg dry	88	88	1	08/01/22	08/02/22 16:45	EH
Fluorene	ND		ug/kg dry	88	88	1	08/01/22	08/02/22 16:45	EH
Indeno[1,2,3-cd]pyrene	ND		ug/kg dry	88	88	1	08/01/22	08/02/22 16:45	EH
2-Methylnaphthalene	ND		ug/kg dry	88	88	1	08/01/22	08/02/22 16:45	EH
Naphthalene	ND		ug/kg dry	88	88	1	08/01/22	08/02/22 16:45	EH
Phenanthrene	ND		ug/kg dry	88	88	1	08/01/22	08/02/22 16:45	EH
<b>Pyrene</b>	<b>97</b>		ug/kg dry	88	88	1	08/01/22	08/02/22 16:45	EH
Surrogate: 2-Fluorophenol		23-121		71 %	08/01/22		08/02/22 16:45		
Surrogate: Phenol-d5		24-113		76 %	08/01/22		08/02/22 16:45		
Surrogate: Nitrobenzene-d5		23-120		72 %	08/01/22		08/02/22 16:45		
Surrogate: 2,4,6-Tribromophenol		19-122		90 %	08/01/22		08/02/22 16:45		
Surrogate: 2-Fluorobiphenyl		30-115		84 %	08/01/22		08/02/22 16:45		
Surrogate: Terphenyl-d14		18-137		88 %	08/01/22		08/02/22 16:45		
<b>PERCENT SOLIDS BY ASTM D2216-05 Prepared by Percent Solids</b>									
Percent Solids	91		%			1	08/01/22	08/02/22 09:45	LN

Rabecka Koons, Quality Assurance Officer

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report must be reproduced in its entirety.

All analyses performed at Maryland Spectral Services included in the report are TNI certified except as indicated at the end of the report

## Analytical Results

**Project: SAND LOT**

Project Number: 22470A  
Project Manager: Keith Progin

Reported:  
08/04/22 16:34

S-6

**2072917-16 (Soil)**  
**Sample Date: 07/29/22**

Analyte	Result	Notes	Units	Reporting Limit (MRL)	Detection Limit (LOD)	Dilution	Prepared	Analyzed	Analyst
<b>POLYCHLORINATED BIPHENYLS BY EPA 8082A (GC/ECD) Prepared by 3540-GC(Soxhlet) CIPestPCB</b>									
Aroclor-1016	ND		ug/kg dry	91.2	91.2	1	08/01/22	08/02/22 14:29	SJA
Aroclor-1221	ND		ug/kg dry	187	187	1	08/01/22	08/02/22 14:29	SJA
Aroclor-1232	ND		ug/kg dry	91.2	91.2	1	08/01/22	08/02/22 14:29	SJA
Aroclor-1242	ND		ug/kg dry	91.2	91.2	1	08/01/22	08/02/22 14:29	SJA
Aroclor-1248	ND		ug/kg dry	91.2	91.2	1	08/01/22	08/02/22 14:29	SJA
Aroclor-1254	ND		ug/kg dry	91.2	91.2	1	08/01/22	08/02/22 14:29	SJA
Aroclor-1260	ND		ug/kg dry	91.2	91.2	1	08/01/22	08/02/22 14:29	SJA
Aroclor-1262	ND		ug/kg dry	91.2	91.2	1	08/01/22	08/02/22 14:29	SJA
Aroclor-1268	ND		ug/kg dry	91.2	91.2	1	08/01/22	08/02/22 14:29	SJA
<i>Surrogate: Tetrachloro-m-xylene</i>			40-150	106 %	08/01/22		08/02/22 14:29		
<i>Surrogate: Decachlorobiphenyl</i>			40-150	100 %	08/01/22		08/02/22 14:29		
<b>Total Metals Analysis by EPA 6020B Prepared by 3050B-Metals Digestion</b>									
<b>Antimony</b>	<b>0.395</b>		mg/kg dry	0.275	0.275	1	08/01/22	08/02/22 13:13	VVD
<b>Arsenic</b>	<b>8.24</b>		mg/kg dry	0.275	0.275	1	08/01/22	08/02/22 13:13	VVD
<b>Beryllium</b>	<b>0.513</b>		mg/kg dry	0.275	0.275	1	08/01/22	08/02/22 13:13	VVD
<b>Cadmium</b>	<b>0.430</b>		mg/kg dry	0.275	0.275	1	08/01/22	08/02/22 13:13	VVD
<b>Chromium</b>	<b>32.4</b>		mg/kg dry	0.275	0.275	1	08/01/22	08/02/22 13:13	VVD
<b>Copper</b>	<b>32.9</b>		mg/kg dry	0.275	0.275	1	08/01/22	08/02/22 13:13	VVD
<b>Lead</b>	<b>118</b>		mg/kg dry	0.275	0.275	1	08/01/22	08/02/22 13:13	VVD
<b>Manganese</b>	<b>456</b>		mg/kg dry	2.75	2.75	10	08/01/22	08/02/22 14:18	VVD
<b>Mercury</b>	<b>0.820</b>		mg/kg dry	0.137	0.137	10	08/01/22	08/02/22 14:18	VVD
<b>Nickel</b>	<b>12.3</b>		mg/kg dry	0.275	0.275	1	08/01/22	08/02/22 13:13	VVD
<b>Selenium</b>	<b>1.47</b>		mg/kg dry	0.275	0.275	1	08/01/22	08/02/22 13:13	VVD
Silver	ND		mg/kg dry	0.275	0.275	1	08/01/22	08/02/22 13:13	VVD
Thallium	ND		mg/kg dry	0.275	0.275	1	08/01/22	08/02/22 13:13	VVD
<b>Zinc</b>	<b>176</b>		mg/kg dry	1.37	1.37	1	08/01/22	08/02/22 13:13	VVD

Rabecka Koons, Quality Assurance Officer

*The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report must be reproduced in its entirety.*

All analyses performed at Maryland Spectral Services included in the report are TNI certified except as indicated at the end of the report



## Analytical Results

**Project: SAND LOT**

Project Number: 22470A  
Project Manager: Keith Progin

**Reported:**  
08/04/22 16:34

S-6

**2072917-16 (Soil)**  
**Sample Date: 07/29/22**

Analyte	Result	Notes	Units	Reporting Limit (MRL)	Detection Limit (LOD)	Dilution	Prepared	Analyzed	Analyst
<b>Hexavalent Chromium by EPA 7199 Prepared by 3060A-Hexavalent Chromium Digestion</b>									
Chromium, Hexavalent	ND		mg/kg dry	0.275	0.275	1	08/03/22	08/03/22 23:24	CRP



Rabecka Koons, Quality Assurance Officer

*The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report must be reproduced in its entirety.*

All analyses performed at Maryland Spectral Services included in the report are TNI certified except as indicated at the end of the report

## Analytical Results

**Project: SAND LOT**

Project Number: 22470A  
Project Manager: Keith Progin

Reported:  
08/04/22 16:34

S-6A

2072917-17 (Soil)  
Sample Date: 07/29/22

Analyte	Result	Notes	Units	Reporting Limit (MRL)	Detection Limit (LOD)	Dilution	Prepared	Analyzed	Analyst
<b>DIESEL RANGE ORGANICS BY EPA 3540/8015C Prepared by 3540-GC(Soxhlet)</b>									
<b>Diesel-Range Organics (C10-C28)</b>	<b>18.8</b>		mg/kg dry	9.4	9.4	1	08/01/22	08/02/22 16:56	EH
<i>Surrogate: o-Terphenyl</i>			70-130	84 %	08/01/22		08/02/22 16:56		
<b>PERCENT SOLIDS BY ASTM D2216-05 Prepared by Percent Solids</b>									
<b>Percent Solids</b>	<b>85</b>		%			1	08/01/22	08/02/22 09:45	LN



Rabecka Koons, Quality Assurance Officer

*The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report must be reproduced in its entirety.*

All analyses performed at Maryland Spectral Services included in the report are TNI certified except as indicated at the end of the report

## Analytical Results

**Project: SAND LOT**

Project Number: 22470A  
Project Manager: Keith Progin

Reported:  
08/04/22 16:34

**S-6B**

**2072917-18 (Soil)**  
**Sample Date: 07/29/22**

Analyte	Result	Notes	Units	Reporting Limit (MRL)	Detection Limit (LOD)	Dilution	Prepared	Analyzed	Analyst
<b>DIESEL RANGE ORGANICS BY EPA 3540/8015C Prepared by 3540-GC(Soxhlet)</b>									
<b>Diesel-Range Organics (C10-C28)</b>	<b>26.5</b>		mg/kg dry	9.0	9.0	1	08/01/22	08/02/22 17:23	EH
<i>Surrogate: o-Terphenyl</i>			70-130	92 %	08/01/22		08/02/22 17:23		
<b>PERCENT SOLIDS BY ASTM D2216-05 Prepared by Percent Solids</b>									
<b>Percent Solids</b>	<b>89</b>		%			1	08/01/22	08/02/22 09:45	LN



Rabecka Koons, Quality Assurance Officer

*The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report must be reproduced in its entirety.*

All analyses performed at Maryland Spectral Services included in the report are TNI certified except as indicated at the end of the report



## Analytical Results

**Project: SAND LOT**

Project Number: 22470A  
Project Manager: Keith Progin

Reported:  
08/04/22 16:34

S-7

**2072917-19 (Soil)**  
**Sample Date: 07/29/22**

Analyte	Result	Notes	Units	Reporting Limit (MRL)	Detection Limit (LOD)	Dilution	Prepared	Analyzed	Analyst
<b>Semivolatile Organics by EPA 8270D (GC/MS) Prepared by 3540-GCMS(Soxhlet)</b>									
Acenaphthene	ND		ug/kg dry	87	87	1	08/01/22	08/02/22 17:05	EH
Acenaphthylene	ND		ug/kg dry	87	87	1	08/01/22	08/02/22 17:05	EH
Anthracene	ND		ug/kg dry	87	87	1	08/01/22	08/02/22 17:05	EH
Benzo[a]anthracene	ND		ug/kg dry	87	87	1	08/01/22	08/02/22 17:05	EH
Benzo[b]fluoranthene	ND		ug/kg dry	87	87	1	08/01/22	08/02/22 17:05	EH
Benzo[k]fluoranthene	ND		ug/kg dry	87	87	1	08/01/22	08/02/22 17:05	EH
Benzo[g,h,i]perylene	ND		ug/kg dry	87	87	1	08/01/22	08/02/22 17:05	EH
Benzo[a]pyrene	ND		ug/kg dry	87	87	1	08/01/22	08/02/22 17:05	EH
Chrysene	ND		ug/kg dry	87	87	1	08/01/22	08/02/22 17:05	EH
Dibenz[a,h]anthracene	ND		ug/kg dry	87	87	1	08/01/22	08/02/22 17:05	EH
Fluoranthene	ND		ug/kg dry	87	87	1	08/01/22	08/02/22 17:05	EH
Fluorene	ND		ug/kg dry	87	87	1	08/01/22	08/02/22 17:05	EH
Indeno[1,2,3-cd]pyrene	ND		ug/kg dry	87	87	1	08/01/22	08/02/22 17:05	EH
2-Methylnaphthalene	ND		ug/kg dry	87	87	1	08/01/22	08/02/22 17:05	EH
Naphthalene	ND		ug/kg dry	87	87	1	08/01/22	08/02/22 17:05	EH
Phenanthrene	ND		ug/kg dry	87	87	1	08/01/22	08/02/22 17:05	EH
Pyrene	ND		ug/kg dry	87	87	1	08/01/22	08/02/22 17:05	EH
Surrogate: 2-Fluorophenol		23-121		73 %	08/01/22		08/02/22 17:05		
Surrogate: Phenol-d5		24-113		78 %	08/01/22		08/02/22 17:05		
Surrogate: Nitrobenzene-d5		23-120		73 %	08/01/22		08/02/22 17:05		
Surrogate: 2,4,6-Tribromophenol		19-122		89 %	08/01/22		08/02/22 17:05		
Surrogate: 2-Fluorobiphenyl		30-115		85 %	08/01/22		08/02/22 17:05		
Surrogate: Terphenyl-d14		18-137		89 %	08/01/22		08/02/22 17:05		
<b>PERCENT SOLIDS BY ASTM D2216-05 Prepared by Percent Solids</b>									
Percent Solids	92		%			1	08/01/22	08/02/22 09:45	LN

Rabecka Koons, Quality Assurance Officer

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report must be reproduced in its entirety.

All analyses performed at Maryland Spectral Services included in the report are TNI certified except as indicated at the end of the report

## Analytical Results

**Project: SAND LOT**

Project Number: 22470A  
Project Manager: Keith Progin

Reported:  
08/04/22 16:34

S-7

**2072917-19 (Soil)**  
**Sample Date: 07/29/22**

Analyte	Result	Notes	Units	Reporting Limit (MRL)	Detection Limit (LOD)	Dilution	Prepared	Analyzed	Analyst
<b>POLYCHLORINATED BIPHENYLS BY EPA 8082A (GC/ECD) Prepared by 3540-GC(Soxhlet) CIPestPCB</b>									
Aroclor-1016	ND		ug/kg dry	90.2	90.2	1	08/01/22	08/02/22 14:45	SJA
Aroclor-1221	ND		ug/kg dry	185	185	1	08/01/22	08/02/22 14:45	SJA
Aroclor-1232	ND		ug/kg dry	90.2	90.2	1	08/01/22	08/02/22 14:45	SJA
Aroclor-1242	ND		ug/kg dry	90.2	90.2	1	08/01/22	08/02/22 14:45	SJA
Aroclor-1248	ND		ug/kg dry	90.2	90.2	1	08/01/22	08/02/22 14:45	SJA
Aroclor-1254	ND		ug/kg dry	90.2	90.2	1	08/01/22	08/02/22 14:45	SJA
Aroclor-1260	ND		ug/kg dry	90.2	90.2	1	08/01/22	08/02/22 14:45	SJA
Aroclor-1262	ND		ug/kg dry	90.2	90.2	1	08/01/22	08/02/22 14:45	SJA
Aroclor-1268	ND		ug/kg dry	90.2	90.2	1	08/01/22	08/02/22 14:45	SJA
<i>Surrogate: Tetrachloro-m-xylene</i>			40-150	101 %	08/01/22		08/02/22 14:45		
<i>Surrogate: Decachlorobiphenyl</i>			40-150	93 %	08/01/22		08/02/22 14:45		
<b>Total Metals Analysis by EPA 6020B Prepared by 3050B-Metals Digestion</b>									
Antimony	ND		mg/kg dry	0.272	0.272	1	08/01/22	08/02/22 13:15	VVD
<b>Arsenic</b>	<b>5.80</b>		mg/kg dry	0.272	0.272	1	08/01/22	08/02/22 13:15	VVD
<b>Beryllium</b>	<b>0.574</b>		mg/kg dry	0.272	0.272	1	08/01/22	08/02/22 13:15	VVD
<b>Cadmium</b>	<b>0.278</b>		mg/kg dry	0.272	0.272	1	08/01/22	08/02/22 13:15	VVD
<b>Chromium</b>	<b>22.9</b>		mg/kg dry	0.272	0.272	1	08/01/22	08/02/22 13:15	VVD
<b>Copper</b>	<b>17.8</b>		mg/kg dry	0.272	0.272	1	08/01/22	08/02/22 13:15	VVD
<b>Lead</b>	<b>49.3</b>		mg/kg dry	0.272	0.272	1	08/01/22	08/02/22 13:15	VVD
<b>Manganese</b>	<b>355</b>		mg/kg dry	2.72	2.72	10	08/01/22	08/02/22 14:20	VVD
<b>Mercury</b>	<b>0.223</b>		mg/kg dry	0.0136	0.0136	1	08/01/22	08/02/22 13:15	VVD
<b>Nickel</b>	<b>13.9</b>		mg/kg dry	0.272	0.272	1	08/01/22	08/02/22 13:15	VVD
<b>Selenium</b>	<b>1.41</b>		mg/kg dry	0.272	0.272	1	08/01/22	08/02/22 13:15	VVD
Silver	ND		mg/kg dry	0.272	0.272	1	08/01/22	08/02/22 13:15	VVD
Thallium	ND		mg/kg dry	0.272	0.272	1	08/01/22	08/02/22 13:15	VVD
<b>Zinc</b>	<b>100</b>		mg/kg dry	1.36	1.36	1	08/01/22	08/02/22 13:15	VVD



Rabecka Koons, Quality Assurance Officer

*The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report must be reproduced in its entirety.*

All analyses performed at Maryland Spectral Services included in the report are TNI certified except as indicated at the end of the report

## Analytical Results

**Project: SAND LOT**

Project Number: 22470A  
Project Manager: Keith Progin

Reported:  
08/04/22 16:34

S-7

**2072917-19 (Soil)**  
**Sample Date: 07/29/22**

Analyte	Result	Notes	Units	Reporting Limit (MRL)	Detection Limit (LOD)	Dilution	Prepared	Analyzed	Analyst
<b>Hexavalent Chromium by EPA 7199 Prepared by 3060A-Hexavalent Chromium Digestion</b>									
Chromium, Hexavalent	ND		mg/kg dry	0.272	0.272	1	08/03/22	08/03/22 23:42	CRP



Rabecka Koons, Quality Assurance Officer

*The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report must be reproduced in its entirety.*

All analyses performed at Maryland Spectral Services included in the report are TNI certified except as indicated at the end of the report



## Analytical Results

**Project: SAND LOT**

Project Number: 22470A  
Project Manager: Keith Progin

Reported:  
08/04/22 16:34

S-7A

2072917-20 (Soil)  
Sample Date: 07/29/22

Analyte	Result	Notes	Units	Reporting Limit (MRL)	Detection Limit (LOD)	Dilution	Prepared	Analyzed	Analyst
<b>DIESEL RANGE ORGANICS BY EPA 3540/8015C Prepared by 3540-GC(Soxhlet)</b>									
Diesel-Range Organics (C10-C28)	12.3		mg/kg dry	8.9	8.9	1	08/01/22	08/02/22 18:16	EH
Surrogate: o-Terphenyl		70-130		86 %	08/01/22		08/02/22 18:16		
<b>PERCENT SOLIDS BY ASTM D2216-05 Prepared by Percent Solids</b>									
Percent Solids	90		%			1	08/01/22	08/02/22 09:45	LN



Rabecka Koons, Quality Assurance Officer

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report must be reproduced in its entirety.

## Analytical Results

**Project: SAND LOT**

Project Number: 22470A  
Project Manager: Keith Progin

Reported:  
08/04/22 16:34

S-7B

2072917-21 (Soil)  
Sample Date: 07/29/22

Analyte	Result	Notes	Units	Reporting Limit (MRL)	Detection Limit (LOD)	Dilution	Prepared	Analyzed	Analyst
<b>DIESEL RANGE ORGANICS BY EPA 3540/8015C Prepared by 3540-GC(Soxhlet)</b>									
Diesel-Range Organics (C10-C28)	15.4		mg/kg dry	9.0	9.0	1	08/01/22	08/02/22 18:42	EH
Surrogate: o-Terphenyl		70-130		94 %	08/01/22		08/02/22 18:42		
<b>PERCENT SOLIDS BY ASTM D2216-05 Prepared by Percent Solids</b>									
Percent Solids	89		%			1	08/01/22	08/02/22 09:45	LN



Rabecka Koons, Quality Assurance Officer

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report must be reproduced in its entirety.

All analyses performed at Maryland Spectral Services included in the report are TNI certified except as indicated at the end of the report

**Analytical Results**

**Project: SAND LOT**

Project Number: 22470A  
Project Manager: Keith Progin

Reported:  
08/04/22 16:34

S-8

2072917-22 (Soil)  
Sample Date: 07/29/22

Analyte	Result	Notes	Units	Reporting Limit (MRL)	Detection Limit (LOD)	Dilution	Prepared	Analyzed	Analyst
<b>Semivolatile Organics by EPA 8270D (GC/MS) Prepared by 3540-GCMS(Soxhlet)</b>									
Acenaphthene	ND		ug/kg dry	89	89	1	08/01/22	08/02/22 17:26	EH
Acenaphthylene	270		ug/kg dry	89	89	1	08/01/22	08/02/22 17:26	EH
Anthracene	ND		ug/kg dry	89	89	1	08/01/22	08/02/22 17:26	EH
Benzo[a]anthracene	540		ug/kg dry	89	89	1	08/01/22	08/02/22 17:26	EH
Benzo[b]fluoranthene	1000		ug/kg dry	89	89	1	08/01/22	08/02/22 17:26	EH
Benzo[k]fluoranthene	280		ug/kg dry	89	89	1	08/01/22	08/02/22 17:26	EH
Benzo[g,h,i]perylene	630		ug/kg dry	89	89	1	08/01/22	08/02/22 17:26	EH
Benzo[a]pyrene	720		ug/kg dry	89	89	1	08/01/22	08/02/22 17:26	EH
Chrysene	510		ug/kg dry	89	89	1	08/01/22	08/02/22 17:26	EH
Dibenz[a,h]anthracene	150		ug/kg dry	89	89	1	08/01/22	08/02/22 17:26	EH
Fluoranthene	730		ug/kg dry	89	89	1	08/01/22	08/02/22 17:26	EH
Fluorene	ND		ug/kg dry	89	89	1	08/01/22	08/02/22 17:26	EH
Indeno[1,2,3-cd]pyrene	780		ug/kg dry	89	89	1	08/01/22	08/02/22 17:26	EH
2-Methylnaphthalene	ND		ug/kg dry	89	89	1	08/01/22	08/02/22 17:26	EH
Naphthalene	96		ug/kg dry	89	89	1	08/01/22	08/02/22 17:26	EH
Phenanthrene	130		ug/kg dry	89	89	1	08/01/22	08/02/22 17:26	EH
Pyrene	700		ug/kg dry	89	89	1	08/01/22	08/02/22 17:26	EH
Surrogate: 2-Fluorophenol		23-121		72 %	08/01/22		08/02/22 17:26		
Surrogate: Phenol-d5		24-113		77 %	08/01/22		08/02/22 17:26		
Surrogate: Nitrobenzene-d5		23-120		73 %	08/01/22		08/02/22 17:26		
Surrogate: 2,4,6-Tribromophenol		19-122		90 %	08/01/22		08/02/22 17:26		
Surrogate: 2-Fluorobiphenyl		30-115		86 %	08/01/22		08/02/22 17:26		
Surrogate: Terphenyl-d14		18-137		91 %	08/01/22		08/02/22 17:26		

**PERCENT SOLIDS BY ASTM D2216-05 Prepared by Percent Solids**

Percent Solids	90		%			1	08/01/22	08/02/22 09:45	LN
----------------	----	--	---	--	--	---	----------	----------------	----

Rabecka Koons, Quality Assurance Officer

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report must be reproduced in its entirety.

All analyses performed at Maryland Spectral Services included in the report are TNI certified except as indicated at the end of the report



## Analytical Results

**Project: SAND LOT**

Project Number: 22470A  
Project Manager: Keith Progin

Reported:  
08/04/22 16:34

S-8

2072917-22 (Soil)  
Sample Date: 07/29/22

Analyte	Result	Notes	Units	Reporting Limit (MRL)	Detection Limit (LOD)	Dilution	Prepared	Analyzed	Analyst
<b>POLYCHLORINATED BIPHENYLS BY EPA 8082A (GC/ECD) Prepared by 3540-GC(Soxhlet) CIPestPCB</b>									
Aroclor-1016	ND		ug/kg dry	92.2	92.2	1	08/01/22	08/02/22 15:00	SJA
Aroclor-1221	ND		ug/kg dry	189	189	1	08/01/22	08/02/22 15:00	SJA
Aroclor-1232	ND		ug/kg dry	92.2	92.2	1	08/01/22	08/02/22 15:00	SJA
Aroclor-1242	ND		ug/kg dry	92.2	92.2	1	08/01/22	08/02/22 15:00	SJA
Aroclor-1248	ND		ug/kg dry	92.2	92.2	1	08/01/22	08/02/22 15:00	SJA
Aroclor-1254	ND		ug/kg dry	92.2	92.2	1	08/01/22	08/02/22 15:00	SJA
Aroclor-1260	ND		ug/kg dry	92.2	92.2	1	08/01/22	08/02/22 15:00	SJA
Aroclor-1262	ND		ug/kg dry	92.2	92.2	1	08/01/22	08/02/22 15:00	SJA
Aroclor-1268	ND		ug/kg dry	92.2	92.2	1	08/01/22	08/02/22 15:00	SJA
<i>Surrogate: Tetrachloro-m-xylene</i>			40-150	111 %	08/01/22		08/02/22 15:00		
<i>Surrogate: Decachlorobiphenyl</i>			40-150	101 %	08/01/22		08/02/22 15:00		
<b>Total Metals Analysis by EPA 6020B Prepared by 3050B-Metals Digestion</b>									
Antimony	ND		mg/kg dry	0.278	0.278	1	08/01/22	08/02/22 13:18	VVD
<b>Arsenic</b>	<b>4.92</b>		mg/kg dry	0.278	0.278	1	08/01/22	08/02/22 13:18	VVD
<b>Beryllium</b>	<b>0.782</b>		mg/kg dry	0.278	0.278	1	08/01/22	08/02/22 13:18	VVD
Cadmium	ND		mg/kg dry	0.278	0.278	1	08/01/22	08/02/22 13:18	VVD
<b>Chromium</b>	<b>23.4</b>		mg/kg dry	0.278	0.278	1	08/01/22	08/02/22 13:18	VVD
<b>Copper</b>	<b>19.9</b>		mg/kg dry	0.278	0.278	1	08/01/22	08/02/22 13:18	VVD
<b>Lead</b>	<b>46.8</b>		mg/kg dry	0.278	0.278	1	08/01/22	08/02/22 13:18	VVD
<b>Manganese</b>	<b>408</b>		mg/kg dry	2.78	2.78	10	08/01/22	08/02/22 14:23	VVD
<b>Mercury</b>	<b>0.0913</b>		mg/kg dry	0.0139	0.0139	1	08/01/22	08/02/22 13:18	VVD
<b>Nickel</b>	<b>14.9</b>		mg/kg dry	0.278	0.278	1	08/01/22	08/02/22 13:18	VVD
<b>Selenium</b>	<b>1.53</b>		mg/kg dry	0.278	0.278	1	08/01/22	08/02/22 13:18	VVD
Silver	ND		mg/kg dry	0.278	0.278	1	08/01/22	08/02/22 13:18	VVD
Thallium	ND		mg/kg dry	0.278	0.278	1	08/01/22	08/02/22 13:18	VVD
<b>Zinc</b>	<b>105</b>		mg/kg dry	1.39	1.39	1	08/01/22	08/02/22 13:18	VVD

Rabecka Koons, Quality Assurance Officer

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report must be reproduced in its entirety.

All analyses performed at Maryland Spectral Services included in the report are TNI certified except as indicated at the end of the report

## Analytical Results

**Project: SAND LOT**

Project Number: 22470A  
Project Manager: Keith Progin

Reported:  
08/04/22 16:34

S-8

2072917-22 (Soil)  
Sample Date: 07/29/22

Analyte	Result	Notes	Units	Reporting Limit (MRL)	Detection Limit (LOD)	Dilution	Prepared	Analyzed	Analyst
<b>Hexavalent Chromium by EPA 7199 Prepared by 3060A-Hexavalent Chromium Digestion</b>									
Chromium, Hexavalent	ND		mg/kg dry	0.278	0.278	1	08/03/22	08/03/22 23:59	CRP



Rabecka Koons, Quality Assurance Officer

*The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report must be reproduced in its entirety.*

**Analytical Results**

**Project: SAND LOT**

Project Number: 22470A  
Project Manager: Keith Progin

Reported:  
08/04/22 16:34

S-8A

2072917-23 (Soil)  
Sample Date: 07/29/22

Analyte	Result	Notes	Units	Reporting Limit (MRL)	Detection Limit (LOD)	Dilution	Prepared	Analyzed	Analyst
<b>DIESEL RANGE ORGANICS BY EPA 3540/8015C Prepared by 3540-GC(Soxhlet)</b>									
Diesel-Range Organics (C10-C28)	14.4		mg/kg dry	9.2	9.2	1	08/01/22	08/02/22 19:35	EH
Surrogate: o-Terphenyl			70-130	93 %	08/01/22		08/02/22 19:35		
<b>PERCENT SOLIDS BY ASTM D2216-05 Prepared by Percent Solids</b>									
Percent Solids	87		%			1	08/01/22	08/02/22 09:45	LN



Rabecka Koons, Quality Assurance Officer

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report must be reproduced in its entirety.

All analyses performed at Maryland Spectral Services included in the report are TNI certified except as indicated at the end of the report



## Analytical Results

**Project: SAND LOT**

Project Number: 22470A  
Project Manager: Keith Progin

Reported:  
08/04/22 16:34

**S-8B**

**2072917-24 (Soil)**  
**Sample Date: 07/29/22**

Analyte	Result	Notes	Units	Reporting Limit (MRL)	Detection Limit (LOD)	Dilution	Prepared	Analyzed	Analyst
<b>DIESEL RANGE ORGANICS BY EPA 3540/8015C Prepared by 3540-GC(Soxhlet)</b>									
Diesel-Range Organics (C10-C28)	ND		mg/kg dry	8.7	8.7	1	08/01/22	08/02/22 20:02	EH
Surrogate: <i>o</i> -Terphenyl			70-130	98 %	08/01/22		08/02/22 20:02		
<b>PERCENT SOLIDS BY ASTM D2216-05 Prepared by Percent Solids</b>									
Percent Solids	92		%			1	08/01/22	08/02/22 09:45	LN



Rabecka Koons, Quality Assurance Officer

*The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report must be reproduced in its entirety.*

All analyses performed at Maryland Spectral Services included in the report are TNI certified except as indicated at the end of the report

## Analytical Results

**Project: SAND LOT**

Project Number: 22470A  
Project Manager: Keith Progin

Reported:  
08/04/22 16:34

S-9

2072917-25 (Soil)  
Sample Date: 07/29/22

Analyte	Result	Notes	Units	Reporting Limit (MRL)	Detection Limit (LOD)	Dilution	Prepared	Analyzed	Analyst
<b>Semivolatile Organics by EPA 8270D (GC/MS) Prepared by 3540-GCMS(Soxhlet)</b>									
Acenaphthene	ND		ug/kg dry	90	90	1	08/01/22	08/02/22 17:47	EH
Acenaphthylene	ND		ug/kg dry	90	90	1	08/01/22	08/02/22 17:47	EH
Anthracene	ND		ug/kg dry	90	90	1	08/01/22	08/02/22 17:47	EH
Benzo[a]anthracene	ND		ug/kg dry	90	90	1	08/01/22	08/02/22 17:47	EH
Benzo[b]fluoranthene	ND		ug/kg dry	90	90	1	08/01/22	08/02/22 17:47	EH
Benzo[k]fluoranthene	ND		ug/kg dry	90	90	1	08/01/22	08/02/22 17:47	EH
Benzo[g,h,i]perylene	ND		ug/kg dry	90	90	1	08/01/22	08/02/22 17:47	EH
Benzo[a]pyrene	ND		ug/kg dry	90	90	1	08/01/22	08/02/22 17:47	EH
Chrysene	ND		ug/kg dry	90	90	1	08/01/22	08/02/22 17:47	EH
Dibenz[a,h]anthracene	ND		ug/kg dry	90	90	1	08/01/22	08/02/22 17:47	EH
Fluoranthene	ND		ug/kg dry	90	90	1	08/01/22	08/02/22 17:47	EH
Fluorene	ND		ug/kg dry	90	90	1	08/01/22	08/02/22 17:47	EH
Indeno[1,2,3-cd]pyrene	ND		ug/kg dry	90	90	1	08/01/22	08/02/22 17:47	EH
2-Methylnaphthalene	ND		ug/kg dry	90	90	1	08/01/22	08/02/22 17:47	EH
Naphthalene	ND		ug/kg dry	90	90	1	08/01/22	08/02/22 17:47	EH
Phenanthrene	ND		ug/kg dry	90	90	1	08/01/22	08/02/22 17:47	EH
Pyrene	ND		ug/kg dry	90	90	1	08/01/22	08/02/22 17:47	EH
Surrogate: 2-Fluorophenol		23-121		74 %	08/01/22		08/02/22 17:47		
Surrogate: Phenol-d5		24-113		78 %	08/01/22		08/02/22 17:47		
Surrogate: Nitrobenzene-d5		23-120		75 %	08/01/22		08/02/22 17:47		
Surrogate: 2,4,6-Tribromophenol		19-122		88 %	08/01/22		08/02/22 17:47		
Surrogate: 2-Fluorobiphenyl		30-115		86 %	08/01/22		08/02/22 17:47		
Surrogate: Terphenyl-d14		18-137		91 %	08/01/22		08/02/22 17:47		
<b>PERCENT SOLIDS BY ASTM D2216-05 Prepared by Percent Solids</b>									
Percent Solids	89		%			1	08/01/22	08/02/22 09:45	LN

Rabecka Koons, Quality Assurance Officer

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report must be reproduced in its entirety.

All analyses performed at Maryland Spectral Services included in the report are TNI certified except as indicated at the end of the report

## Analytical Results

**Project: SAND LOT**

Project Number: 22470A  
Project Manager: Keith Progin

Reported:  
08/04/22 16:34

S-9

2072917-25 (Soil)  
Sample Date: 07/29/22

Analyte	Result	Notes	Units	Reporting Limit (MRL)	Detection Limit (LOD)	Dilution	Prepared	Analyzed	Analyst
<b>POLYCHLORINATED BIPHENYLS BY EPA 8082A (GC/ECD) Prepared by 3540-GC(Soxhlet) CIPestPCB</b>									
Aroclor-1016	ND		ug/kg dry	93.3	93.3	1	08/01/22	08/02/22 15:16	SJA
Aroclor-1221	ND		ug/kg dry	191	191	1	08/01/22	08/02/22 15:16	SJA
Aroclor-1232	ND		ug/kg dry	93.3	93.3	1	08/01/22	08/02/22 15:16	SJA
Aroclor-1242	ND		ug/kg dry	93.3	93.3	1	08/01/22	08/02/22 15:16	SJA
Aroclor-1248	ND		ug/kg dry	93.3	93.3	1	08/01/22	08/02/22 15:16	SJA
Aroclor-1254	ND		ug/kg dry	93.3	93.3	1	08/01/22	08/02/22 15:16	SJA
Aroclor-1260	ND		ug/kg dry	93.3	93.3	1	08/01/22	08/02/22 15:16	SJA
Aroclor-1262	ND		ug/kg dry	93.3	93.3	1	08/01/22	08/02/22 15:16	SJA
Aroclor-1268	ND		ug/kg dry	93.3	93.3	1	08/01/22	08/02/22 15:16	SJA
<i>Surrogate: Tetrachloro-m-xylene</i>			40-150	107 %	08/01/22		08/02/22 15:16		
<i>Surrogate: Decachlorobiphenyl</i>			40-150	94 %	08/01/22		08/02/22 15:16		
<b>Total Metals Analysis by EPA 6020B Prepared by 3050B-Metals Digestion</b>									
Antimony	ND		mg/kg dry	0.281	0.281	1	08/01/22	08/02/22 13:20	VVD
<b>Arsenic</b>	<b>5.06</b>		mg/kg dry	0.281	0.281	1	08/01/22	08/02/22 13:20	VVD
<b>Beryllium</b>	<b>0.581</b>		mg/kg dry	0.281	0.281	1	08/01/22	08/02/22 13:20	VVD
<b>Cadmium</b>	<b>0.351</b>		mg/kg dry	0.281	0.281	1	08/01/22	08/02/22 13:20	VVD
<b>Chromium</b>	<b>26.2</b>		mg/kg dry	0.281	0.281	1	08/01/22	08/02/22 13:20	VVD
<b>Copper</b>	<b>18.7</b>		mg/kg dry	0.281	0.281	1	08/01/22	08/02/22 13:20	VVD
<b>Lead</b>	<b>51.2</b>		mg/kg dry	0.281	0.281	1	08/01/22	08/02/22 13:20	VVD
<b>Manganese</b>	<b>402</b>		mg/kg dry	2.81	2.81	10	08/01/22	08/02/22 14:25	VVD
<b>Mercury</b>	<b>0.251</b>		mg/kg dry	0.0140	0.0140	1	08/01/22	08/02/22 13:20	VVD
<b>Nickel</b>	<b>14.6</b>		mg/kg dry	0.281	0.281	1	08/01/22	08/02/22 13:20	VVD
<b>Selenium</b>	<b>1.54</b>		mg/kg dry	0.281	0.281	1	08/01/22	08/02/22 13:20	VVD
Silver	ND		mg/kg dry	0.281	0.281	1	08/01/22	08/02/22 13:20	VVD
Thallium	ND		mg/kg dry	0.281	0.281	1	08/01/22	08/02/22 13:20	VVD
<b>Zinc</b>	<b>130</b>		mg/kg dry	1.40	1.40	1	08/01/22	08/02/22 13:20	VVD

Rabecka Koons, Quality Assurance Officer

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report must be reproduced in its entirety.

All analyses performed at Maryland Spectral Services included in the report are TNI certified except as indicated at the end of the report



## Analytical Results

**Project: SAND LOT**

Project Number: 22470A  
Project Manager: Keith Progin

**Reported:**  
08/04/22 16:34

S-9

**2072917-25 (Soil)**  
**Sample Date: 07/29/22**

Analyte	Result	Notes	Units	Reporting Limit (MRL)	Detection Limit (LOD)	Dilution	Prepared	Analyzed	Analyst
<b>Hexavalent Chromium by EPA 7199 Prepared by 3060A-Hexavalent Chromium Digestion</b>									
Chromium, Hexavalent	ND		mg/kg dry	0.281	0.281	1	08/03/22	08/04/22 00:17	CRP



Rabecka Koons, Quality Assurance Officer

*The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report must be reproduced in its entirety.*

All analyses performed at Maryland Spectral Services included in the report are TNI certified except as indicated at the end of the report

## Analytical Results

**Project: SAND LOT**

Project Number: 22470A  
Project Manager: Keith Progin

Reported:  
08/04/22 16:34

S-9A

2072917-26 (Soil)  
Sample Date: 07/29/22

Analyte	Result	Notes	Units	Reporting Limit (MRL)	Detection Limit (LOD)	Dilution	Prepared	Analyzed	Analyst
<b>DIESEL RANGE ORGANICS BY EPA 3540/8015C Prepared by 3540-GC(Soxhlet)</b>									
Diesel-Range Organics (C10-C28)	18.6		mg/kg dry	9.0	9.0	1	08/01/22	08/02/22 20:55	EH
Surrogate: o-Terphenyl		70-130		86 %	08/01/22		08/02/22 20:55		
<b>PERCENT SOLIDS BY ASTM D2216-05 Prepared by Percent Solids</b>									
Percent Solids	89		%			1	08/01/22	08/02/22 09:45	LN



Rabecka Koons, Quality Assurance Officer

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report must be reproduced in its entirety.

All analyses performed at Maryland Spectral Services included in the report are TNI certified except as indicated at the end of the report

## Analytical Results

**Project: SAND LOT**

Project Number: 22470A  
Project Manager: Keith Progin

Reported:  
08/04/22 16:34

**S-9B**

**2072917-27 (Soil)**  
**Sample Date: 07/29/22**

Analyte	Result	Notes	Units	Reporting Limit (MRL)	Detection Limit (LOD)	Dilution	Prepared	Analyzed	Analyst
<b>DIESEL RANGE ORGANICS BY EPA 3540/8015C Prepared by 3540-GC(Soxhlet)</b>									
<b>Diesel-Range Organics (C10-C28)</b>	<b>23.8</b>		mg/kg dry	9.0	9.0	1	08/01/22	08/02/22 21:22	EH
<i>Surrogate: o-Terphenyl</i>			70-130	88 %	08/01/22		08/02/22 21:22		
<b>PERCENT SOLIDS BY ASTM D2216-05 Prepared by Percent Solids</b>									
<b>Percent Solids</b>	<b>89</b>		%			1	08/01/22	08/02/22 09:45	LN



Rabecka Koons, Quality Assurance Officer

*The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report must be reproduced in its entirety.*

All analyses performed at Maryland Spectral Services included in the report are TNI certified except as indicated at the end of the report



## Analytical Results

**Project: SAND LOT**

Project Number: 22470A  
Project Manager: Keith Progin

Reported:  
08/04/22 16:34

S-10

2072917-28 (Soil)  
Sample Date: 07/29/22

Analyte	Result	Notes	Units	Reporting Limit (MRL)	Detection Limit (LOD)	Dilution	Prepared	Analyzed	Analyst
<b>Semivolatile Organics by EPA 8270D (GC/MS) Prepared by 3540-GCMS(Soxhlet)</b>									
Acenaphthene	ND		ug/kg dry	85	85	1	08/01/22	08/02/22 18:07	EH
Acenaphthylene	ND		ug/kg dry	85	85	1	08/01/22	08/02/22 18:07	EH
<b>Anthracene</b>	<b>1000</b>		ug/kg dry	85	85	1	08/01/22	08/02/22 18:07	EH
<b>Benzo[a]anthracene</b>	<b>300</b>		ug/kg dry	85	85	1	08/01/22	08/02/22 18:07	EH
<b>Benzo[b]fluoranthene</b>	<b>390</b>		ug/kg dry	85	85	1	08/01/22	08/02/22 18:07	EH
<b>Benzo[k]fluoranthene</b>	<b>140</b>		ug/kg dry	85	85	1	08/01/22	08/02/22 18:07	EH
<b>Benzo[g,h,i]perylene</b>	<b>240</b>		ug/kg dry	85	85	1	08/01/22	08/02/22 18:07	EH
<b>Benzo[a]pyrene</b>	<b>290</b>		ug/kg dry	85	85	1	08/01/22	08/02/22 18:07	EH
<b>Chrysene</b>	<b>320</b>		ug/kg dry	85	85	1	08/01/22	08/02/22 18:07	EH
Dibenz[a,h]anthracene	ND		ug/kg dry	85	85	1	08/01/22	08/02/22 18:07	EH
<b>Fluoranthene</b>	<b>510</b>		ug/kg dry	85	85	1	08/01/22	08/02/22 18:07	EH
Fluorene	ND		ug/kg dry	85	85	1	08/01/22	08/02/22 18:07	EH
<b>Indeno[1,2,3-cd]pyrene</b>	<b>280</b>		ug/kg dry	85	85	1	08/01/22	08/02/22 18:07	EH
2-Methylnaphthalene	ND		ug/kg dry	85	85	1	08/01/22	08/02/22 18:07	EH
Naphthalene	ND		ug/kg dry	85	85	1	08/01/22	08/02/22 18:07	EH
<b>Phenanthrene</b>	<b>360</b>		ug/kg dry	85	85	1	08/01/22	08/02/22 18:07	EH
<b>Pyrene</b>	<b>440</b>		ug/kg dry	85	85	1	08/01/22	08/02/22 18:07	EH
Surrogate: 2-Fluorophenol		23-121		75 %	08/01/22		08/02/22 18:07		
Surrogate: Phenol-d5		24-113		79 %	08/01/22		08/02/22 18:07		
Surrogate: Nitrobenzene-d5		23-120		76 %	08/01/22		08/02/22 18:07		
Surrogate: 2,4,6-Tribromophenol		19-122		92 %	08/01/22		08/02/22 18:07		
Surrogate: 2-Fluorobiphenyl		30-115		90 %	08/01/22		08/02/22 18:07		
Surrogate: Terphenyl-d14		18-137		91 %	08/01/22		08/02/22 18:07		
<b>PERCENT SOLIDS BY ASTM D2216-05 Prepared by Percent Solids</b>									
<b>Percent Solids</b>	<b>94</b>		<b>%</b>			1	08/01/22	08/02/22 09:45	LN

Rabecka Koons, Quality Assurance Officer

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report must be reproduced in its entirety.

All analyses performed at Maryland Spectral Services included in the report are TNI certified except as indicated at the end of the report

## Analytical Results

**Project: SAND LOT**

Project Number: 22470A  
Project Manager: Keith Progin

Reported:  
08/04/22 16:34

**S-10**

**2072917-28 (Soil)**  
**Sample Date: 07/29/22**

Analyte	Result	Notes	Units	Reporting Limit (MRL)	Detection Limit (LOD)	Dilution	Prepared	Analyzed	Analyst
<b>POLYCHLORINATED BIPHENYLS BY EPA 8082A (GC/ECD) Prepared by 3540-GC(Soxhlet) CIPestPCB</b>									
Aroclor-1016	ND		ug/kg dry	88.3	88.3	1	08/01/22	08/02/22 15:32	SJA
Aroclor-1221	ND		ug/kg dry	181	181	1	08/01/22	08/02/22 15:32	SJA
Aroclor-1232	ND		ug/kg dry	88.3	88.3	1	08/01/22	08/02/22 15:32	SJA
Aroclor-1242	ND		ug/kg dry	88.3	88.3	1	08/01/22	08/02/22 15:32	SJA
Aroclor-1248	ND		ug/kg dry	88.3	88.3	1	08/01/22	08/02/22 15:32	SJA
Aroclor-1254	ND		ug/kg dry	88.3	88.3	1	08/01/22	08/02/22 15:32	SJA
Aroclor-1260	ND		ug/kg dry	88.3	88.3	1	08/01/22	08/02/22 15:32	SJA
Aroclor-1262	ND		ug/kg dry	88.3	88.3	1	08/01/22	08/02/22 15:32	SJA
Aroclor-1268	ND		ug/kg dry	88.3	88.3	1	08/01/22	08/02/22 15:32	SJA
<i>Surrogate: Tetrachloro-m-xylene</i>			40-150	106 %	08/01/22		08/02/22 15:32		
<i>Surrogate: Decachlorobiphenyl</i>			40-150	94 %	08/01/22		08/02/22 15:32		
<b>Total Metals Analysis by EPA 6020B Prepared by 3050B-Metals Digestion</b>									
Antimony	ND		mg/kg dry	0.266	0.266	1	08/01/22	08/02/22 13:22	VVD
<b>Arsenic</b>	<b>4.06</b>		mg/kg dry	0.266	0.266	1	08/01/22	08/02/22 13:22	VVD
<b>Beryllium</b>	<b>0.647</b>		mg/kg dry	0.266	0.266	1	08/01/22	08/02/22 13:22	VVD
Cadmium	ND		mg/kg dry	0.266	0.266	1	08/01/22	08/02/22 13:22	VVD
<b>Chromium</b>	<b>21.1</b>		mg/kg dry	0.266	0.266	1	08/01/22	08/02/22 13:22	VVD
<b>Copper</b>	<b>11.8</b>		mg/kg dry	0.266	0.266	1	08/01/22	08/02/22 13:22	VVD
<b>Lead</b>	<b>36.3</b>		mg/kg dry	0.266	0.266	1	08/01/22	08/02/22 13:22	VVD
<b>Manganese</b>	<b>303</b>		mg/kg dry	2.66	2.66	10	08/01/22	08/02/22 14:28	VVD
<b>Mercury</b>	<b>0.0981</b>		mg/kg dry	0.0133	0.0133	1	08/01/22	08/02/22 13:22	VVD
<b>Nickel</b>	<b>13.1</b>		mg/kg dry	0.266	0.266	1	08/01/22	08/02/22 13:22	VVD
<b>Selenium</b>	<b>1.56</b>		mg/kg dry	0.266	0.266	1	08/01/22	08/02/22 13:22	VVD
Silver	ND		mg/kg dry	0.266	0.266	1	08/01/22	08/02/22 13:22	VVD
Thallium	ND		mg/kg dry	0.266	0.266	1	08/01/22	08/02/22 13:22	VVD
<b>Zinc</b>	<b>91.7</b>		mg/kg dry	1.33	1.33	1	08/01/22	08/02/22 13:22	VVD

Rabecka Koons, Quality Assurance Officer

*The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report must be reproduced in its entirety.*

All analyses performed at Maryland Spectral Services included in the report are TNI certified except as indicated at the end of the report

## Analytical Results

**Project: SAND LOT**

Project Number: 22470A  
Project Manager: Keith Progin

Reported:  
08/04/22 16:34

**S-10**

**2072917-28 (Soil)**  
**Sample Date: 07/29/22**

Analyte	Result	Notes	Units	Reporting Limit (MRL)	Detection Limit (LOD)	Dilution	Prepared	Analyzed	Analyst
<b>Hexavalent Chromium by EPA 7199 Prepared by 3060A-Hexavalent Chromium Digestion</b>									
Chromium, Hexavalent	ND		mg/kg dry	0.266	0.266	1	08/03/22	08/04/22 00:35	CRP



Rabecka Koons, Quality Assurance Officer

*The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report must be reproduced in its entirety.*

## Analytical Results

**Project: SAND LOT**

Project Number: 22470A  
Project Manager: Keith Progin

Reported:  
08/04/22 16:34

**S-10A**

**2072917-29 (Soil)**  
**Sample Date: 07/29/22**

Analyte	Result	Notes	Units	Reporting Limit (MRL)	Detection Limit (LOD)	Dilution	Prepared	Analyzed	Analyst
<b>DIESEL RANGE ORGANICS BY EPA 3540/8015C Prepared by 3540-GC(Soxhlet)</b>									
<b>Diesel-Range Organics (C10-C28)</b>	<b>15.7</b>		mg/kg dry	9.0	9.0	1	08/01/22	08/02/22 22:41	EH
<i>Surrogate: o-Terphenyl</i>			70-130	85 %	08/01/22		08/02/22 22:41		
<b>PERCENT SOLIDS BY ASTM D2216-05 Prepared by Percent Solids</b>									
<b>Percent Solids</b>	<b>89</b>		%			1	08/01/22	08/02/22 09:45	LN



Rabecka Koons, Quality Assurance Officer

*The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report must be reproduced in its entirety.*

All analyses performed at Maryland Spectral Services included in the report are TNI certified except as indicated at the end of the report



## Analytical Results

**Project: SAND LOT**

Project Number: 22470A  
Project Manager: Keith Progin

Reported:  
08/04/22 16:34

**S-10B**

**2072917-30 (Soil)**  
**Sample Date: 07/29/22**

Analyte	Result	Notes	Units	Reporting Limit (MRL)	Detection Limit (LOD)	Dilution	Prepared	Analyzed	Analyst
<b>DIESEL RANGE ORGANICS BY EPA 3540/8015C Prepared by 3540-GC(Soxhlet)</b>									
<b>Diesel-Range Organics (C10-C28)</b>	<b>10.3</b>		mg/kg dry	8.4	8.4	1	08/01/22	08/02/22 23:08	EH
<i>Surrogate: o-Terphenyl</i>			70-130	99 %	08/01/22		08/02/22 23:08		
<b>PERCENT SOLIDS BY ASTM D2216-05 Prepared by Percent Solids</b>									
<b>Percent Solids</b>	<b>95</b>		%			1	08/01/22	08/02/22 09:45	LN



Rabecka Koons, Quality Assurance Officer

*The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report must be reproduced in its entirety.*

All analyses performed at Maryland Spectral Services included in the report are TNI certified except as indicated at the end of the report

## Analytical Results

**Project: SAND LOT**

Project Number: 22470A  
Project Manager: Keith Progin

Reported:  
08/04/22 16:34

Maryland Spectral Services does not maintain certification for the following analytical parameters:

---

**Maryland Spectral Services**

Matrix , Method , Analyte \_\_\_\_\_

Soil | 7199-(Chromium6) | Chromium, Hexavalent

---



Rabecka Koons, Quality Assurance Officer

*The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report must be reproduced in its entirety.*

All analyses performed at Maryland Spectral Services included in the report are TNI certified except as indicated at the end of the report

## Analytical Results

### Project: SAND LOT

Project Number: 22470A  
Project Manager: Keith Progin

Reported:  
08/04/22 16:34

### Notes and Definitions

- S-98 Spike recovery outside of established control limits.
- QM-4X The spike recovery was outside of QC acceptance limits for the MS and/or MSD due to analyte concentration at 4 times or greater the spike concentration. The QC batch was accepted based on LCS and/or LCSD recoveries within the acceptance limits.
- QM-06 Due to non-homogeneity of the QC sample matrix, the MS/MSD or MS/DUP did not provide reliable results for accuracy and precision. Sample results for the QC batch were accepted based on LCS percent recoveries.
- QM-01 The spike recovery for this QC sample is outside of established control limits due to sample matrix interference.
- E The concentration indicated for this analyte is an estimated value above the calibration range of the instrument. This value is considered an estimate (CLP E-flag).
- RE Sample reanalyses are done at the laboratory's discretion as a mechanism to improve data quality. Any client requested reanalysis will be identified with a sample qualifier.
- ND Analyte NOT DETECTED at or above the reporting limit
- dry Sample results reported on a dry weight basis
- RPD Relative Percent Difference
- %-Solids Percent Solids is a supportive test and as such does not require accreditation

If this report contains any samples analyzed for gasoline range organics (GRO) by EPA Method 8015C and no trip blank was shipped, stored, and received with the sample(s) as required by Section 3.1 of the EPA Method, the sample analysis contained in this report cannot exclude the possibility that any reportable GRO measurement was due to environmental contamination of the sample during shipping or storage.



Rabecka Koons, Quality Assurance Officer

*The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report must be reproduced in its entirety.*

P. 1/3

### CHAIN-OF-CUSTODY RECORD

**Company Name:** Hillis-Covins CHLCA  
**Project Name:** Project Sandlot  
**Sampler(s):** Benjamin Jones

**Project Manager:** Keith Progin  
**Project ID:** 22470A  
**P.O. Number:**

Maryland Spectral Services, Inc.  
 1500 Caton Center Drive, Suite G  
 Baltimore, MD 21227  
 410-247-7600 • Fax 410-247-7602  
 reporting@mdspectral.com

Matrix Codes: NW (non-potable water), DW (drinking water)

Field Sample ID	Date	Time	No. of Containers				Analysis Requested						Preservative	Field Notes	MSS Lab ID
			DW	Water	Soil	Other	PCBs	PAHs	PP Metals	Hexavalent Chromium	Manganese	TPH-DRO			
S-1	7/29/22	9:50			X					X	X	X			2072917-01
S-1A		9:30			X					X	X	X			02
S-1B		9:45			X					X	X	X			03
S-2		10:20			X					X	X	X			04
S-2A		10:05			X					X	X	X			05
S-2B		10:20			X					X	X	X			06
S-3		11:00			X					X	X	X			07
S-3A		10:30			X					X	X	X			08
S-3B		10:50			X					X	X	X			09
S-4		11:15			X					X	X	X			10

**Relinquished by:** *[Signature]*  
 (Printed) Benjamin Jones

**Received by:** *[Signature]*  
 (Printed) Cory Koon

**Date/Time:** 7/29/22  
 16:35

**Lab Use:** Temp: 6.0°C  
 Received on ice  
 Received same day

**Sample Disposal:**  
 Return to Client  
 Disposal by lab  
 Archive for \_\_\_ days



P. 2/3

Company Name:		Project Manager:		Analysis Requested		CHAIN-OF-CUSTODY RECORD	
HCEA		Keith Progin				Maryland Spectral Services, Inc. 1500 Caton Center Drive, Suite G Baltimore, MD 21227 410-247-7600 • Fax 410-247-7602 reporting@mdspectral.com	
Project Name:		Project ID:				Matrix Codes: NW (non-potable water), DW (drinking water)	
Project Sandlot		22470A					
Sampler(s):		P.O. Number:					
Benjamin Jones							
Field Sample ID	Date	Time	DW	Water	Soil	Other	MSS Lab ID
S-4A	7/29/22	11:15			X		2072917-11
S-4B		11:25			X		-12
S-5		12:05			X		-13
S-5A		11:45			X		-14
S-5B		12:00			X		-15
S-6		12:40			X		-16
S-6A		12:25			X		-17
S-6B		12:30			X		-18
S-7		1:10			X		-19
S-7A		1:00			X		-20
Relinquished by: (Signature)		Date/Time		Received by: (Signature)		Date/Time	
<i>[Signature]</i>		7/29/22		<i>[Signature]</i>			
(Printed)				(Printed)			
Benjamin Jones				Received by Lab: (Signature)		Lab Use:	
<i>[Signature]</i>		7-29-22		<i>[Signature]</i>		Temp: 6.0 °C	
(Printed)		1635		(Printed)		<input type="checkbox"/> Received on ice	
				Cary Keens		<input type="checkbox"/> Received same day	
Delivery Method:		Special Instructions/QC Requirements & Comments:					
<input type="checkbox"/> Courier							
<input type="checkbox"/> Client							
<input type="checkbox"/> UPS							
<input type="checkbox"/> FedEx							
<input type="checkbox"/> USPS							
<input type="checkbox"/> Other:							
Sample Disposal:		Turn Around Time:					
<input type="checkbox"/> Return to Client		<input type="checkbox"/> Normal (7 day)					
<input type="checkbox"/> Disposal by lab		<input checked="" type="checkbox"/> 5 day					
<input type="checkbox"/> Archive for ___ days		<input type="checkbox"/> 4 day					
		<input type="checkbox"/> 3 day					
		<input type="checkbox"/> Rush (2 day)					
		<input type="checkbox"/> Next Day					
		<input type="checkbox"/> Other: ___ Date: ___					
		<input type="checkbox"/> Specific Due Date: ___					

P. 3/3

Company Name:		Project Manager:		Analysis Requested		CHAIN-OF-CUSTODY RECORD	
HCEA		Keith Progin		PCBs PAHs PP Metals Hexavalent Chromium Manganese TPH-DRO		Maryland Spectral Services, Inc. 1500 Caton Center Drive, Suite G Baltimore, MD 21227 410-247-7600 • Fax 410-247-7602 reporting@mdspectral.com	
Project Name:		Project ID:		No. of Containers		Matrix Codes: NW (non-potable water), DW (drinking water)	
Project Sandlot		22470A					
Sampler(s):		P.O. Number:					
Benjamin Jones							
Field Sample ID	Date	Time	DW	Water	Soil	Other	MSS Lab ID
5-7B	7/29/22	1:05			X		2072917-21
5-8		1:30			X		-22
5-8A		1:15			X		-23
5-8B		1:40			X		-24
5-9		2:00			X		-25
5-9A		1:55			X		-26
5-9B		1:50			X		-27
5-10		2:15			X		-28
5-10A		2:05			X		-29
5-10B		2:15			X		-30
Relinquished by: (Signature) BW Jones		Date/Time 7/29/22		Received by: (Signature) (Printed)		Date/Time Received by: (Signature) (Printed)	
Benjamin Jones		Date/Time 7-29-22		Received by Lab: (Signature) (Printed) Cory Lyons		Lab Use: Temp: 6.0°C <input type="checkbox"/> Received on Ice <input type="checkbox"/> Received same day	
Relinquished by: (Signature) (Printed)		Date/Time 16:35		Turn Around Time: <input type="checkbox"/> Normal (7 day) <input checked="" type="checkbox"/> 5 day <input type="checkbox"/> 4 day <input type="checkbox"/> 3 day <input type="checkbox"/> Rush (2 day) <input type="checkbox"/> Next Day <input type="checkbox"/> Other: _____ <input type="checkbox"/> Specific Due Date: _____		Sample Disposal: <input type="checkbox"/> Return to Client <input type="checkbox"/> Disposal by lab <input type="checkbox"/> Archive for _____ days	
Delivery Method: <input type="checkbox"/> Courier <input type="checkbox"/> Client <input type="checkbox"/> UPS <input type="checkbox"/> FedEx <input type="checkbox"/> USPS <input type="checkbox"/> Other: _____		Special Instructions/OC Requirements & Comments:					

**TPA – Project Sandlot – Parcel B7**  
**Sample Results –PAHs, PCBs, Priority Pollutant Metals, Manganese, and Hexavalent Chromium**  
**Results and Cleanup Standards are presented in milligrams per kilogram (mg/kg) = parts per million (ppm)**  
**Samples Collected on July 29, 2022**

	S-1	S-2	S-3	S-4	S-5	S-6	S-7	S-8	S-9	S-10	MDE's Non-Residential Cleanup Standard
<b>Polycyclic Aromatic Hydrocarbons (PAHs)</b>											
Acenaphthylene	ND	ND	ND	ND	ND	ND	ND	0.270	ND	ND	NS
Anthracene	ND	ND	ND	ND	ND	ND	ND	ND	ND	1.0	23,000
Benzo(a)anthracene	ND	0.094	ND	ND	ND	ND	ND	0.540	ND	0.300	21.0
Benzo(b)fluoranthene	0.260	0.150	ND	ND	ND	0.088	ND	1.0	ND	0.390	21.0
Benzo(k)fluoranthene	ND	ND	ND	ND	ND	ND	ND	0.280	ND	0.140	210
Benzo(ghi)perylene	ND	ND	ND	ND	ND	ND	ND	0.630	ND	0.240	NS
Benzo(a)pyrene	ND	0.110	ND	ND	ND	ND	ND	0.720	ND	0.290	2.1
Chrysene	ND	0.110	ND	ND	ND	ND	ND	0.510	ND	0.320	2,100
Dibenz(a,h)anthracene	ND	ND	ND	ND	ND	ND	ND	0.150	ND	ND	2.1
Fluoranthene	0.200	0.170	ND	ND	ND	0.100	ND	0.730	ND	0.510	3,000
Indeno(1,2,3-cd)pyrene	ND	0.100	ND	ND	ND	ND	ND	0.780	ND	0.280	21.0
Naphthalene	ND	ND	ND	ND	ND	ND	ND	0.096	ND	ND	17.0
Phenanthrene	ND	ND	ND	ND	ND	ND	ND	0.130	ND	0.360	2,300
Pyrene	0.190	0.150	ND	ND	ND	0.097	ND	0.700	ND	0.440	2,300
Remaining PAHs	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	Varies
<b>Polychlorinated Biphenyls (PCBs)</b>											
All PCBs	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	Varies
<b>Metals</b>											
Antimony	ND	0.398	ND	ND	ND	0.395	ND	ND	ND	ND	47,000
Arsenic	<b>4.45</b>	<b>5.63</b>	<b>7.7</b>	<b>5.92</b>	<b>7.0</b>	<b>8.24</b>	<b>5.80</b>	<b>4.92</b>	<b>5.06</b>	<b>4.06</b>	3.0
Beryllium	1.38	0.522	0.676	0.656	0.461	0.513	0.574	0.782	0.581	0.647	230
Cadmium	0.573	0.745	0.533	0.625	0.338	0.430	0.278	ND	0.351	ND	98
Chromium (total)	290	42.6	34.1	36	26	32.4	22.9	23.4	26.2	21.1	NS
Hexavalent Chromium	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	6.3
Copper	39.3	29.6	26.3	27.5	17.7	32.9	17.8	19.9	18.7	11.8	4,700
Lead	57.5	98.2	77.5	77.7	44.8	118	49.3	46.8	51.2	36.3	See Footnote Below
Manganese	<b>11,000</b>	744	493	828	380	456	355	408	402	303	2,600
Mercury	0.0463	0.502	2.55	0.325	0.309	0.820	0.223	0.0913	0.251	0.0981	4.6
Nickel	20	15.4	16.1	18.7	12.7	12.3	13.9	14.9	14.6	13.1	2,200
Selenium	1.71	1.29	1.80	1.62	1.38	1.47	1.41	1.53	1.54	1.56	580
Silver	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	580
Thallium	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	1.2
Zinc	326	289	207	225	130	176	100	105	130	91.7	35,000

The concentrations that are highlighted and in bold exceed the Standard for that constituent

ND = Not detected at a concentration exceeding the laboratory's practical quantitation limit

NS = No Standard is provided by the MDE

- = Not Applicable: Constituent was not analyzed for this sample

Footnote – the non-residential cleanup standard is no longer applicable for lead. The MDE has established a Commercial Soil Screening Concentration for lead of 550ppm and an Industrial Soil Screening Concentration for lead of 1,050ppm. As seen in the table, the detected concentrations do not exceed either the commercial or industrial screening concentrations.

**TPA – Project Sandlot – Parcel B7**

**Sample Results –TPH-DRO**

**Results and Cleanup Standards are presented in milligrams per kilogram (mg/kg) = parts per million (ppm)**

**Samples Collected on July 29, 2022**

<b>Sample ID</b>	<b>TPH-DRO</b>
S-1A	74.6
S-1B	70.6
S-2A	73.2
S-2B	42.0
S-3A	19.9
S-3B	ND
S-4A	10.4
S-4B	ND
S-5A	12.2
S-5B	ND
S-6A	18.8
S-6B	26.5
S-7A	12.3
S-7B	15.4
S-8A	14.4
S-8B	ND
S-9A	18.6
S-9B	23.8
S-10A	15.7
S-10B	10.3
<b>MDE Non-Residential Cleanup Standard</b>	<b>620</b>

ND = Not detected at a concentration exceeding the laboratory's practical quantitation limit



---

---

## **APPENDIX C**

---

---

**Construction Worker Soil Screening Levels  
Maximum Allowable Work Day Exposure  
Calculation Spreadsheet - Sub-Parcel B7-2**

Description	Variable	Value
Days worked per week	DW	5
Exposure duration (yr)	ED	1
Hours worked per day	ET	8
A/constant (unitless) - particulate emission factor	Aconst	12.9351
B/constant (unitless) - particulate emission factor	Bconst	5.7383
C/constant (unitless) - particulate emission factor	Cconst	71.7711
Dispersion correction factor (unitless)	FD	0.185
Days per year with at least .01" precipitation	P	130
Target hazard quotient (unitless)	THQ	1
Body weight (kg)	BW	80
Averaging time - noncancer (yr)	ATnc	1
Soil ingestion rate (mg/d)	IR	330
Skin-soil adherence factor (mg/cm <sup>2</sup> )	AF	0.3
Skin surface exposed (cm <sup>2</sup> )	SA	3300
Event frequency (ev/day)	EV	1
Target cancer risk (unitless)	TR	01E-06
Averaging time - cancer (yr)	ATc	70
A/constant (unitless) - volatilization	Aconstv	2.4538
B/constant (unitless) - volatilization	Bconstv	17.566
C/constant (unitless) - volatilization	Cconstv	189.0426
Dry soil bulk density (kg/L)	Pb	1.5
Average source depth (m)	ds	3
Soil particle density (g/cm <sup>3</sup> )	Ps	2.65
Total soil porosity	Lpore/Lsoil	0.43
Air-filled soil porosity	Lair/Lsoil	0.28

**Construction Worker Soil Screening Levels  
Maximum Allowable Work Day Exposure  
Calculation Spreadsheet - Sub-Parcel B7-2**

Area of site (ac)	Ac	13.6	→ Site-Wide EU 1-EXP
Overall duration of construction (wk/yr)	EW	33	
Exposure frequency (day/yr)	EF	165	
Cars per day	Ca	5	
Tons per car	CaT	2	
Trucks per day	Tru	5	
Tons per truck	TrT	20	
Mean vehicle weight (tons)	w	11	
Derivation of dispersion factor - particulate emission factor (g/m <sup>2</sup> -s per kg/m <sup>3</sup> )	Q/Csr	14.9	
Overall duration of construction (hr)	tc	5,544	
Overall duration of traffic (s)	Tt	4,752,000	
Surface area (m <sup>2</sup> )	AR	50,990	
Length (m)	LR	226	
Distance traveled (km)	ΣVKT	373	
Particulate emission factor (m <sup>3</sup> /kg)	PEFsc	87,160,209	
Derivation of dispersion factor - volatilization (g/m <sup>2</sup> -s per kg/m <sup>3</sup> )	Q/Csa	8.11	
Total time of construction (s)	Tcv	4,752,000	

Input  
Calculation

Chemical	RfD & RfC Sources	<sup>1</sup> Ingestion SF (mg/kg-day)	<sup>1</sup> Inhalation Unit Risk (ug/m <sup>3</sup> ) <sup>-1</sup>	<sup>1</sup> Subchronic RfD (mg/kg-day)	<sup>1</sup> Subchronic RfC (mg/m <sup>3</sup> )	<sup>1</sup> GIABS	Dermally Adjusted RfD (mg/kg-day)	<sup>1</sup> ABS	<sup>1</sup> RBA	<sup>1</sup> Dia	<sup>1</sup> Diw	<sup>1</sup> Henry's Law Constant (unitless)	<sup>1</sup> Kd	<sup>1</sup> Koc	DA	Volatilization Factor - Unlimited Reservoir (m <sup>3</sup> /kg)	Carcinogenic Ingestion/ Dermal SL (SLing/der)	Carcinogenic Inhalation SL (SLinh)	Carcinogenic SL (mg/kg)	Non-Carcinogenic Ingestion/ Dermal SL (SLing/der)	Non-Carcinogenic Inhalation SL (SLinh)	Non-Carcinogenic SL (mg/kg)
Arsenic, Inorganic	I/C	1.50E+00	4.30E-03	3.00E-04	1.50E-05	1	3.00E-04	0.03	0.6			-	2.90E+01				23.0	9,717	22.9	148	8,954	145
Iron	P	-	-	7.00E-01	-	1	7.00E-01	0.01	1			-	2.50E+01							364,457		364,457
Manganese (Non-diet)	I	-	-	2.40E-02	5.00E-05	0.04	9.60E-04	0.01	1			-	6.50E+01							7,355	28,845	5,901

\*chemical specific parameters found in Chemical Specific Parameters Spreadsheet at <https://www.epa.gov/risk/regional-screening-levels-rsls>  
<sup>1</sup>chemical specific parameters found in Unpaved Road Traffic calculator at [https://epa-prgs.onml.gov/cgi-bin/chemicals/csl\\_search](https://epa-prgs.onml.gov/cgi-bin/chemicals/csl_search)  
I: chemical specific parameters found in the IRIS at <https://www.epa.gov/iris>  
C: chemical specific parameters found in Cal EPA at <https://www.dtsc.ca.gov/AssessingRisk>  
P: chemical specific parameters found in the Database of EPA PPRTVs at <https://hhpprtv.onml.gov/quickview/pprtv.php>

---

---

## **APPENDIX D**

---

---



# **Sparrows Point Development - PPE Standard**

## **Operational Procedure, Revision 3**

### **Planning, Tracking/Supervision, Enforcement, and Documentation**

#### **Planning**

- Response and Development Work Plan (RDWP) for each individual redevelopment sub-parcel identifies and documents site conditions.
- RDWP is reviewed and approved by regulators.
- Contractor HASP to address site-specific conditions and PPE requirements:
  - Contractor H&S professional to sign-off on PPE requirements for site workers;
  - Job Safety Analysis (JSA) to be performed for ground intrusive work.
- Project Environmental Professional (EP) assigned to each construction project – monitors project during environmentally sensitive project phases and is available to construction contractor on an as needed basis. EP responsibilities include the following:
  - Dust monitoring
  - Routine ground intrusive breathing space air monitoring
  - Soil tracking
  - Water handling oversight
  - Ground intrusive work observation
  - Notification for unexpected conditions
- Pre-construction meeting identifies EP roles and responsibilities and reviews site conditions.
- Contractor to perform job-site HazCom. HazCom to be addressed in Contractor HASP and include:
  - PPE requirements,
  - Exposure time limits,
  - Identification of chemicals of concern and potential effects of over-exposure (adverse reactions),
  - Methods and routes of potential exposure.
- All personnel that will be performing ground intrusive work within impacted soils shall sign-off on HazCom.
- If, based on a thorough review of Site conditions, it is expected that construction workers will have the potential to encounter materials considered hazardous waste under RCRA or DOT regulations, HAZWOPER-trained personnel will be utilized.

#### **Tracking/Supervision**

- Contractor to record any day that there is ground intrusive work and confirm that proper PPE is being worn.
- EP will note ground intrusive work on daily work sheets and perform at least one spot check per day.
- EP will log on daily work sheets PPE compliance for all intrusive work areas at least once per day.

- EP to take example photos of Exclusion Zones/Contamination Reduction Zones periodically.

### **Work Zones Delineation**

- Exclusion Zone – The Exclusion Zones will include the areas proposed for excavation or with active trenches, excavations, or ground intrusive work, at a minimum. Personnel working within the exclusion zone will be required to wear Modified Level D PPE as described in this SOP. EP to take example photos of Exclusion Zones/Contamination Reduction Zones periodically. The Exclusion Zones will be identified each work day.
- Contamination Reduction Zone – This work zone is located outside of the exclusion zone, but inside of the limits of development (LOD). The Contamination Reduction Zone will be located adjacent to the Exclusion Zone, and all personal decontamination including removal of all disposable PPE/removal of soil from boots will be completed in the Contamination Reduction Zone.

### **Documentation**

- Contractor HASP and HazCom.
- Contractor ground intrusive tracking record.
- HASP and HazCom sign-in sheets.
- EP pre-con memos.
- EP daily work sheets.
- Records documenting intrusive work and proper PPE use to be provided in completion report.

### **Enforcement**

- Non-compliance of PPE requirements will result in disciplinary action up to and including prohibition from working on Sparrows Point.

### **Unknown and/or Unexpected Conditions**

If unknown and/or unexpected conditions are encountered during the project that the EP determines to have a reasonable potential to significantly impact construction worker health and safety, the following will be initiated:

1. Job stoppage,
2. TPA and MDE notification,
3. Re-assessment of conditions.

Work will not continue until EP has cleared the area. If hazardous waste is identified, a HAZWOPER contractor will be brought in to address. The approved contingency plan will be implemented, where appropriate.

### **Modified Level D PPE**

Modified Level D PPE will include, at a minimum, overalls such as polyethylene-coated Tyvek or clean washable cloth overalls, latex (or similar) disposable gloves (when working in wet/chemical surroundings) or work gloves, steel-toe/steel-shank high ankle work boots with taped chemical-protective over-boots (as necessary), dust mask, hard hat, safety glasses with

side shields, and hearing protection (as necessary). If chemical-protective over-boots create increased slip/trip/fall hazardous, then standard leather or rubber work boots could be used, but visible soils from the sides and bottoms of the boots must be removed upon exiting the Exclusion Zone.

SP Development PPE Procedure 4-3-19

---


---

## **APPENDIX E**

---

---



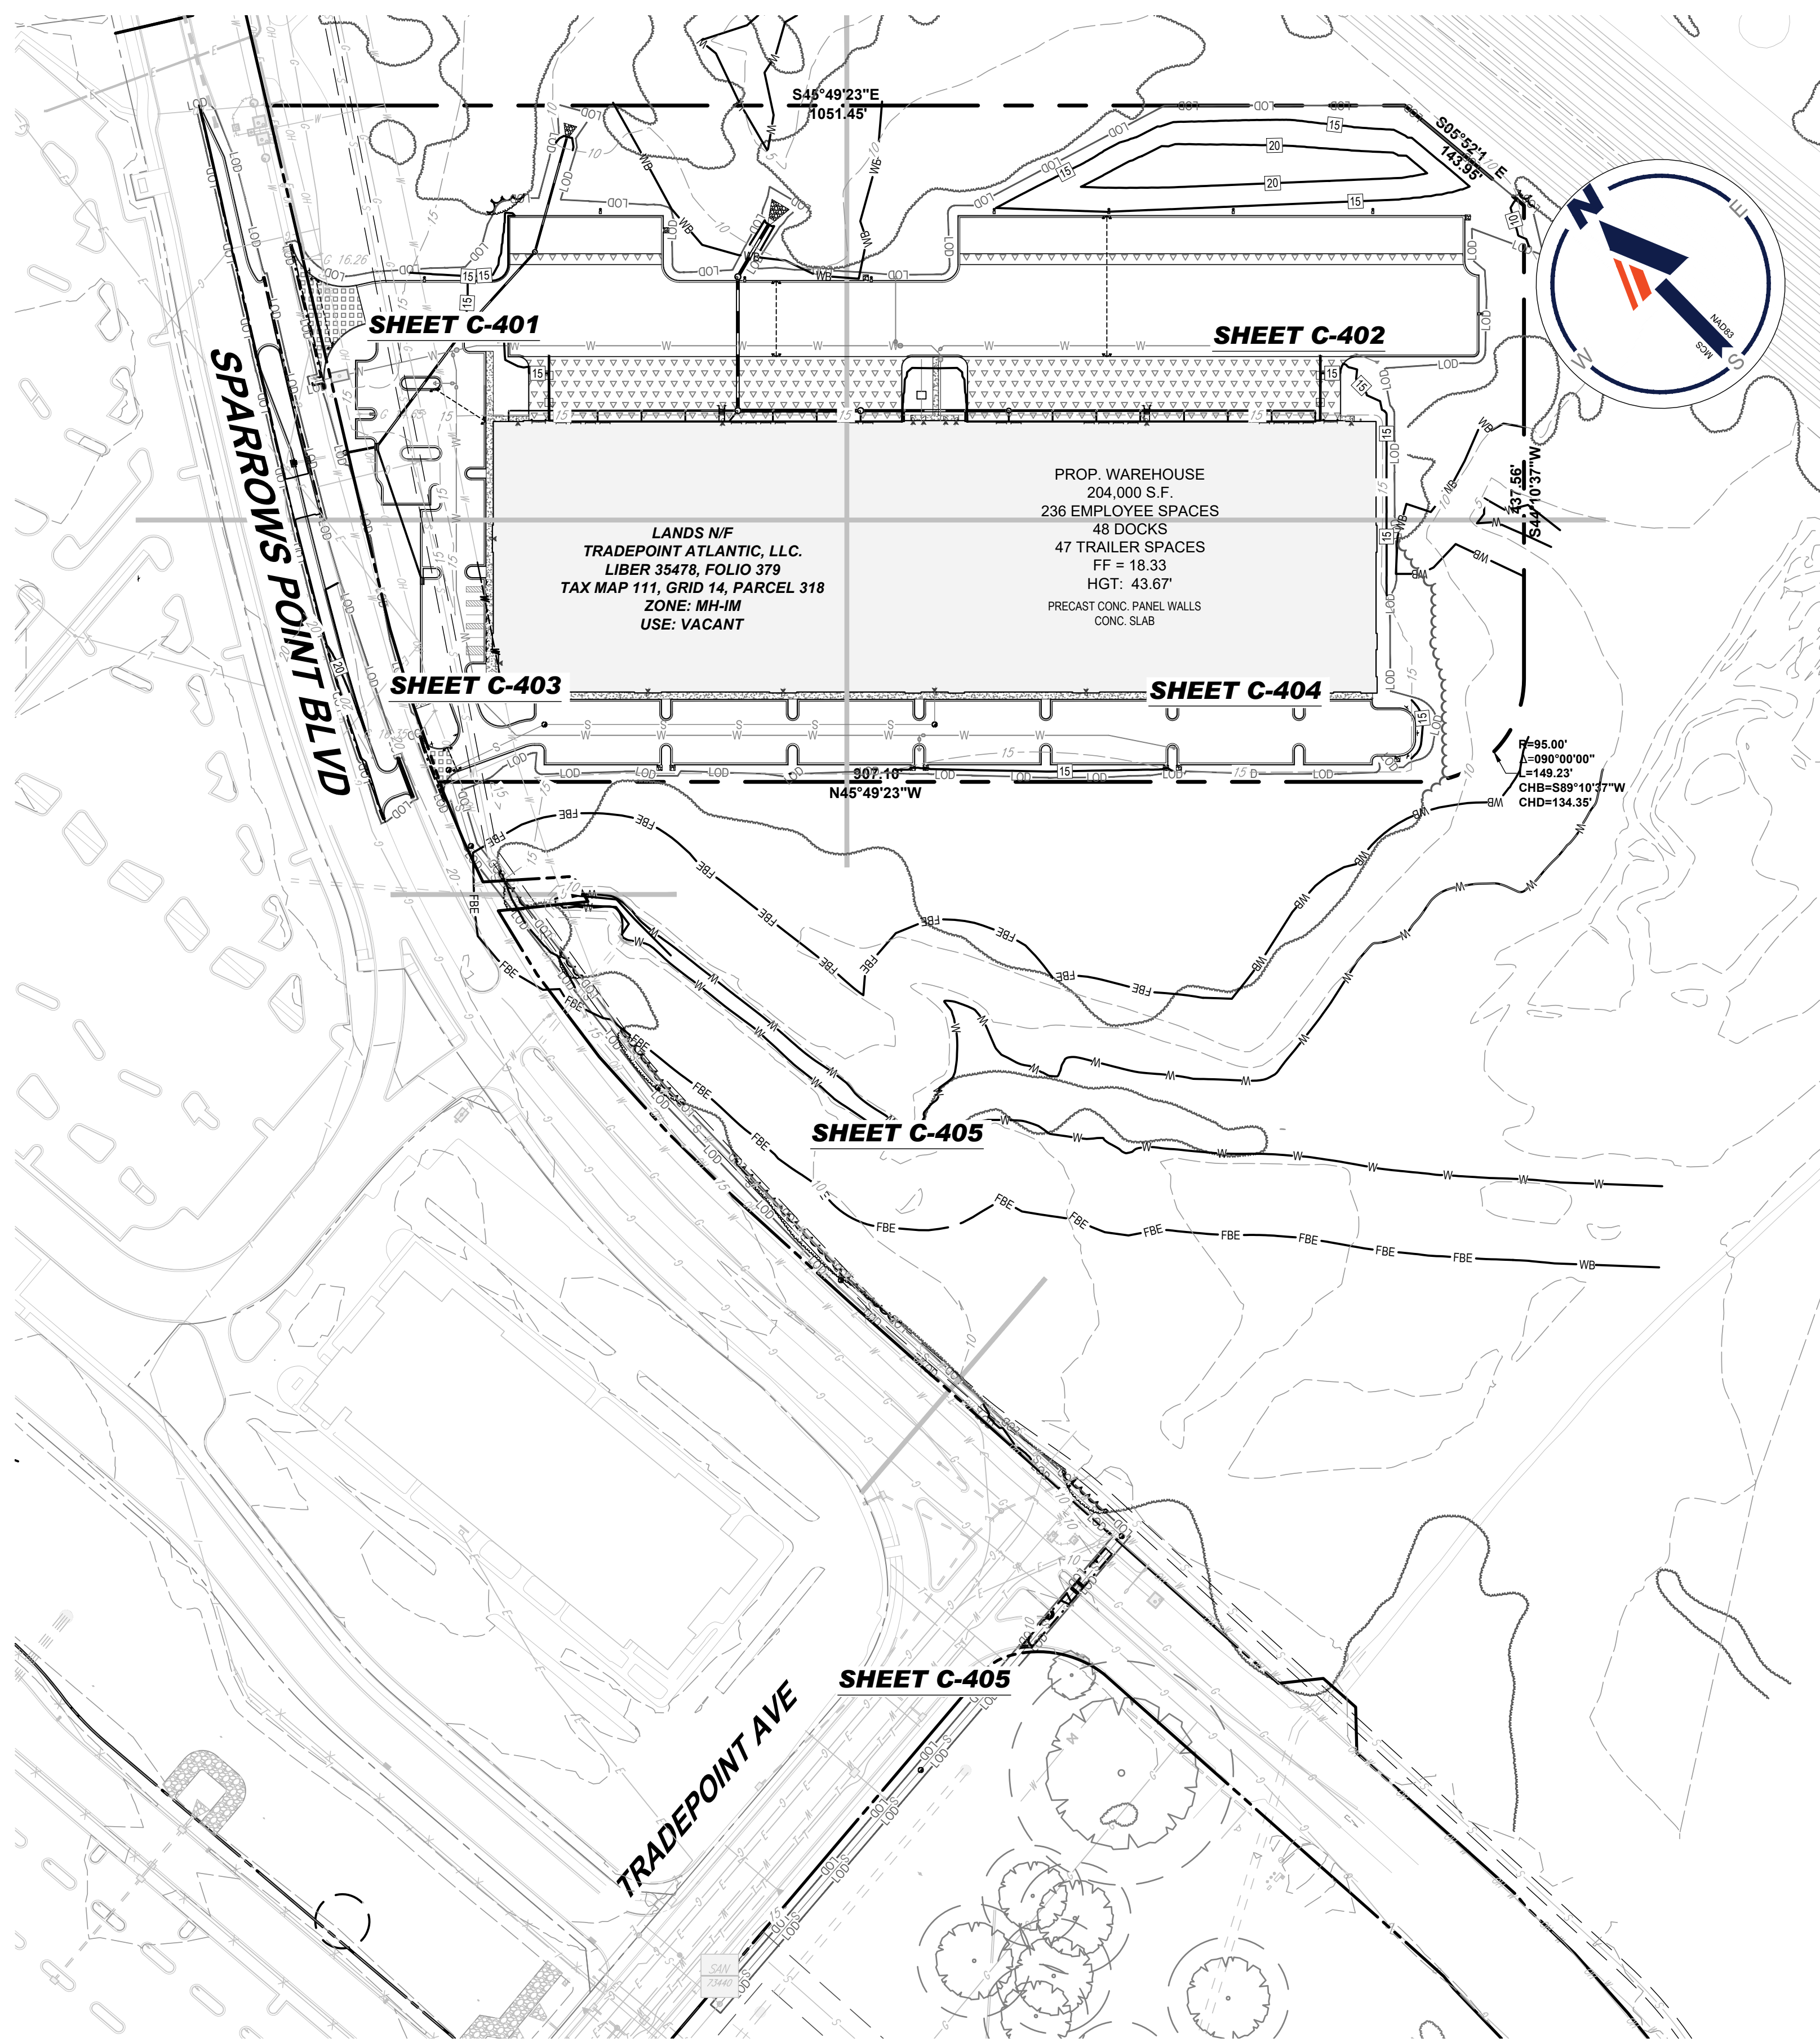


**BALTIMORE COUNTY STANDARD GRADING PLAN NOTES**

1. THE PROPOSED GRADING SHOWN ON THIS PLAN MEETS THE REQUIREMENTS SET FORTH BY BALTIMORE COUNTY DEPARTMENT OF ENVIRONMENTAL PROTECTION AND SUSTAINABILITY AND COMPLIES WITH ARTICLE 33, TITLE 5 OF THE BALTIMORE COUNTY CODE. HOWEVER, DUE TO BUILDING TYPES AND LAYOUT, SOME FIELD ADJUSTMENTS MAY BE REQUIRED. ALL CHANGES MUST COMPLY WITH THE ABOVE MENTIONED REQUIREMENTS.
2. ALL SWALES HAVE BEEN DESIGNED BY THE ENGINEER TO CONVEY RUNOFF ACCORDING TO BALTIMORE COUNTY DEPARTMENT OF PUBLIC WORKS DESIGN STANDARDS.
3. THERE SHALL BE NO CLEARING, GRADING, CONSTRUCTION OR DISTURBANCE OF VEGETATION IN THE CRITICAL AREA BUFFER, EXCEPT AS PERMITTED BY THE BALTIMORE COUNTY DEPARTMENT OF ENVIRONMENTAL PROTECTION AND SUSTAINABILITY.
4. STORMWATER MANAGEMENT AND CRITICAL AREA 10% POLLUTION REDUCTION REQUIREMENTS HAVE BEEN ADDRESSED BY A VARIANCE TO UTILIZE CREDITS FROM THE TIN MILL CANAL REGIONAL POND.

**SITE SPECIFIC GRADING NOTES**

1. ALL UTILITIES SHOWN ARE PRIVATE UNLESS OTHERWISE NOTED.
2. THE SUBJECT DEVELOPMENT AREA IS LOCATED IN FLOOD ZONE 'X' (AREAS DETERMINED TO BE OUTSIDE THE 0.2% ANNUAL CHANCE FLOODPLAIN) PER MAP ENTITLED "NATIONAL FLOOD INSURANCE PROGRAM, FIRM, FLOOD INSURANCE RATE MAP, BALTIMORE COUNTY, MARYLAND (UNINCORPORATED AREAS) PANEL 555 OF 580", MAP NUMBER 240010555G, MAP REVISED MAY 5, 2014, AND PLAN PREPARED BY PAL DEV. PLANS REVIEW, DATED SEPTEMBER 21, 2016, PER MAP 0555F, DATED SEPTEMBER 26, 2009.
3. ADDITIONAL EXISTING UTILITIES AND SITE FEATURES LOCATED WITHIN THE LIMIT OF DISTURBANCE NOT IDENTIFIED AS "TO BE REMOVED" OR "TO BE RELOCATED" MAY REQUIRE REMOVAL OR RELOCATION AS DIRECTED BY THE GEOTECHNICAL ENGINEER AND APPROVED BY TRADEPOINT DEVELOPMENT.
4. EXISTING UTILITIES NOTED AS "TO REMAIN" WITHIN THE LIMIT OF DISTURBANCE MUST BE MAINTAINED TO PROVIDE SERVICE FOR THE PROPOSED OR ADJACENT DEVELOPMENT.
5. EXISTING GRADES SHOWN ON THIS PLAN ARE BASED ON CAD FILES PROVIDED BY TRADEPOINT DEVELOPMENT ON 5/26/16 AND MASS GRADING PLANS PREPARED BY BOHLER ENGINEERING VA, LLC DATED 6/10/22, LAST REVISED 9/21/22. IF ACTUAL EXISTING GRADES DIFFER FROM WHAT IS SHOWN ON THESE PLANS, CONTRACTOR IS TO NOTIFY BOHLER IN WRITING.
6. EXISTING MANHOLE, CLEANOUT, AND VALVE COVERS WITHIN THE LIMIT OF DISTURBANCE NOT IDENTIFIED AS "TO BE REMOVED" ARE TO BE ADJUSTED TO MEET FINAL GRADES.
7. LOCATION OF ALL UNDERGROUND UTILITIES ARE APPROXIMATE. SOURCE INFORMATION FROM PLANS AND MARKINGS HAVE BEEN COMBINED WITH OBSERVED EVIDENCE OF UTILITIES TO DEVELOP A VIEW OF THOSE UNDERGROUND UTILITIES. HOWEVER, LACKING EXCAVATION, THE EXACT LOCATION OF UNDERGROUND FEATURES CANNOT BE ACCURATELY, COMPLETELY, AND RELIABLY DEPICTED. WHERE ADDITIONAL OR MORE DETAILED INFORMATION IS REQUIRED, THE CLIENT IS ADVISED THAT EXCAVATION MAY BE REQUIRED.
8. SPOTS NOTED AS ± HAVE BEEN INTERPOLATED FROM EXISTING TOPOGRAPHY. CONTRACTOR IS TO VERIFY THESE SPOT ELEVATIONS PRIOR TO CONSTRUCTION AND NOTIFY BOHLER IN WRITING IF THE ACTUAL ELEVATIONS DIFFER.
9. NONTIDAL WETLANDS AND THEIR BUFFERS ARE SHOWN PER A SURVEY BY MORRIS AND RITCHE ASSOCIATES, INC. ENTITLED "18939 SPARROWS POINT FLAG LOCATION - FASTBALL TOPO.DWG" DATED 4/28/22 AND A PLAN PREPARED BY ECOSCIENCE PROFESSIONALS ENTITLED "CALCULATED BUFFERS.PDF" RECEIVED 5/12/22.

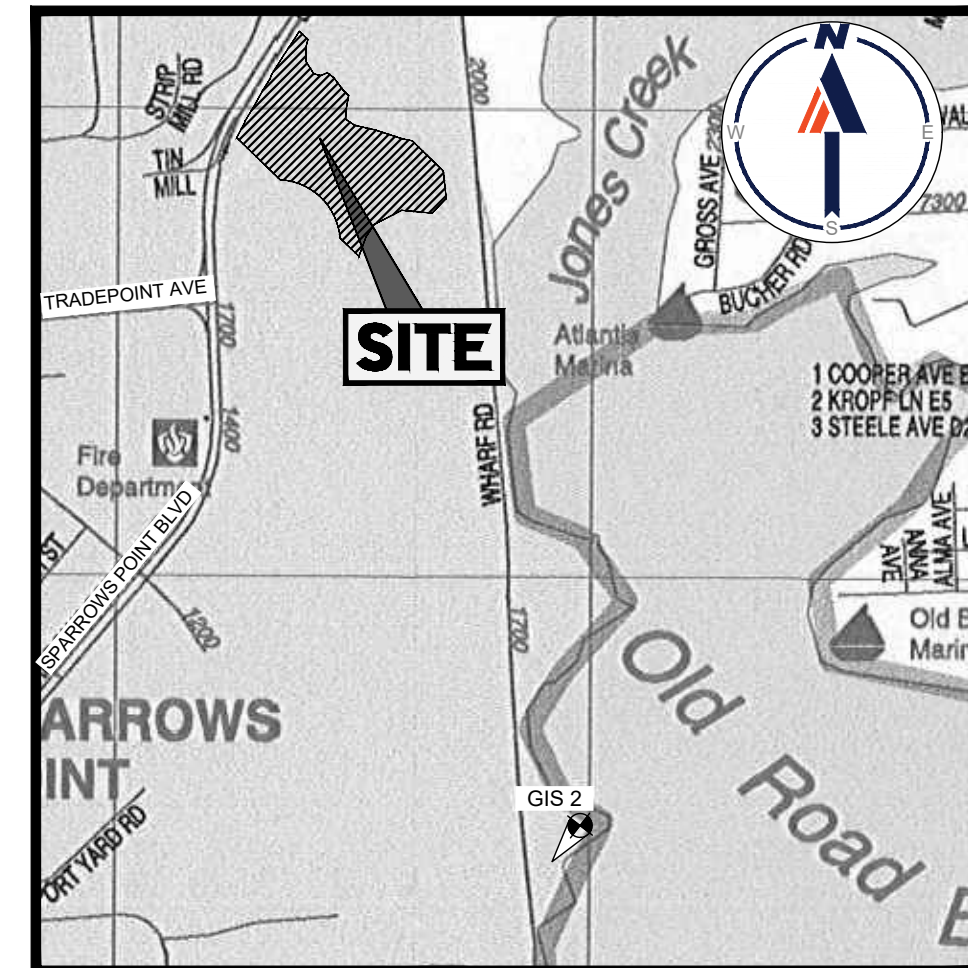

**LOCATION MAP**

COPYRIGHT ADC THE MAP PEOPLE  
PERMIT USE NO. 20602153-5  
SCALE: 1"=1,000'


**BENCHMARK INFORMATION**

ELEVATIONS ARE BASED ON NAVD 88. COORDINATES AND MERIDIAN ARE BASED ON THE MARYLAND COORDINATE SYSTEM (MCS) PER THE FOLLOWING MONUMENTS:

GIS #2 (BRASS DISK)  
N 565.182.39, E. 1,464.480.72, ELEV. 9.95  
EAST SIDE OF WHARF ROAD 408'S NORTH OF LIGHT TOWER

**LEGEND**

EXISTING NOTE	TYPICAL NOTE TEXT	PROPOSED NOTE
---120---	ONSITE PROPERTY LINE / R.O.W. LINE	---120---
---121---	CONTOUR LINE	---121---
TC 516.4 OR 516.4	SPOT ELEVATIONS	● TC 516.00 ● BC 515.50
---	SANITARY SEWER LINE	---
---	UNDERGROUND WATER LINE	---
---	INDUSTRIAL WATER LINE	---
---	UNDERGROUND ELECTRIC LINE	---
---	UNDERGROUND GAS LINE	---
---	OVERHEAD WIRE	---
---	UNDERGROUND TELEPHONE LINE	---
---	STORM SEWER	---
---	SANITARY SEWER FORCE MAIN	---
---	LIMIT OF DISTURBANCE	---LOD---LOD---
---	IDA CRITICAL AREA BOUNDARY	---
---	CONCRETE CURB & GUTTER	---CURB AND GUTTER---
---	SPILL CURB	---
---	NONTIDAL WETLANDS	---
---	CRITICAL AREA EXPANDED BUFFER	---
---	FOREST BUFFER	---



**OWNER / DEVELOPER**

TRADEPOINT ATLANTIC, LLC.  
6995 BETHLEHEM BOULEVARD  
BALTIMORE, MD 21219  
CONTACT: ISAAC ROBINSON  
PHONE: 302-377-8094

STORMWATER MANAGEMENT PERMIT NOT REQUIRED

BALTIMORE COUNTY  
DEPARTMENT OF ENVIRONMENTAL PROTECTION  
AND SUSTAINABILITY

APPROVED FOR GRADING

DATE \_\_\_\_\_

**OWNER'S/DEVELOPER'S CERTIFICATION - GRADING**

I/WE CERTIFY THAT ALL GRADING ON THIS SITE WILL BE DONE IN ACCORDANCE WITH THE CURRENT GRADING REQUIREMENTS AS SET FORTH BY THE BALTIMORE COUNTY DEPARTMENT OF ENVIRONMENTAL PROTECTION AND SUSTAINABILITY AND WITH THE REQUIREMENTS SPECIFIED IN ARTICLE 33, TITLE 5 OF THE BALTIMORE COUNTY CODE.

SIGNATURE OF OWNER/DEVELOPER \_\_\_\_\_ TITLE \_\_\_\_\_ DATE \_\_\_\_\_

PRINT NAME \_\_\_\_\_

GRADING 1 OF 6

LIMIT OF DISTURBANCE: 555,400 S.F. OR 12.75 AC.

MARYLAND COORDINATE SYSTEM (MCS)

**REVISIONS**

REV	DATE	COMMENT	DRAWN BY
1	4/5/23	REV PER CLIENT COMMENTS	RMS
			MJG

THIS DRAWING IS INTENDED FOR MUNICIPAL AND/OR AGENCY REVIEW AND APPROVAL. IT IS NOT INTENDED AS A CONSTRUCTION DOCUMENT UNLESS INDICATED OTHERWISE.

PROJECT No.: MDA220034.00  
DRAWN BY: RMS/DM  
CHECKED BY: JCB  
DATE: 3/31/23  
CAD ID: 1

PROJECT:

**PHASE II PLANS**

FOR

PROJECT SANDLOT  
1651 SPARROWS POINT BLVD  
BALTIMORE, MD 21219  
TAX MAP 111, GRID 14, PARCEL 318  
ELECTION DISTRICT 15  
COUNCILMANIC DISTRICT 7  
BALTIMORE COUNTY

**BOHLER**

901 DULANEY VALLEY ROAD, SUITE 801  
TOWSON, MARYLAND 21204  
Phone: (410) 821-7900  
Fax: (410) 821-7987  
JBASS@BOHLERENG.COM

**M.J. GESELL**

PROFESSIONAL ENGINEER  
MARYLAND LICENSE # 44097  
PROFESSIONAL CERTIFICATION  
I, MICHAEL J. GESELL, HEREBY CERTIFY THAT THESE DOCUMENTS WERE PREPARED OR APPROVED BY ME, AND THAT I AM A DULY LICENSED PROFESSIONAL ENGINEER UNDER THE LAWS OF THE STATE OF MARYLAND. LICENSE NO. 44097, EXPIRATION DATE: 6/23/23

SHEET TITLE:



**OVERALL FINAL GRADING PLAN**

SHEET NUMBER:

C-400

MDE PROJECT NO. 23-SF-\_\_\_\_\_



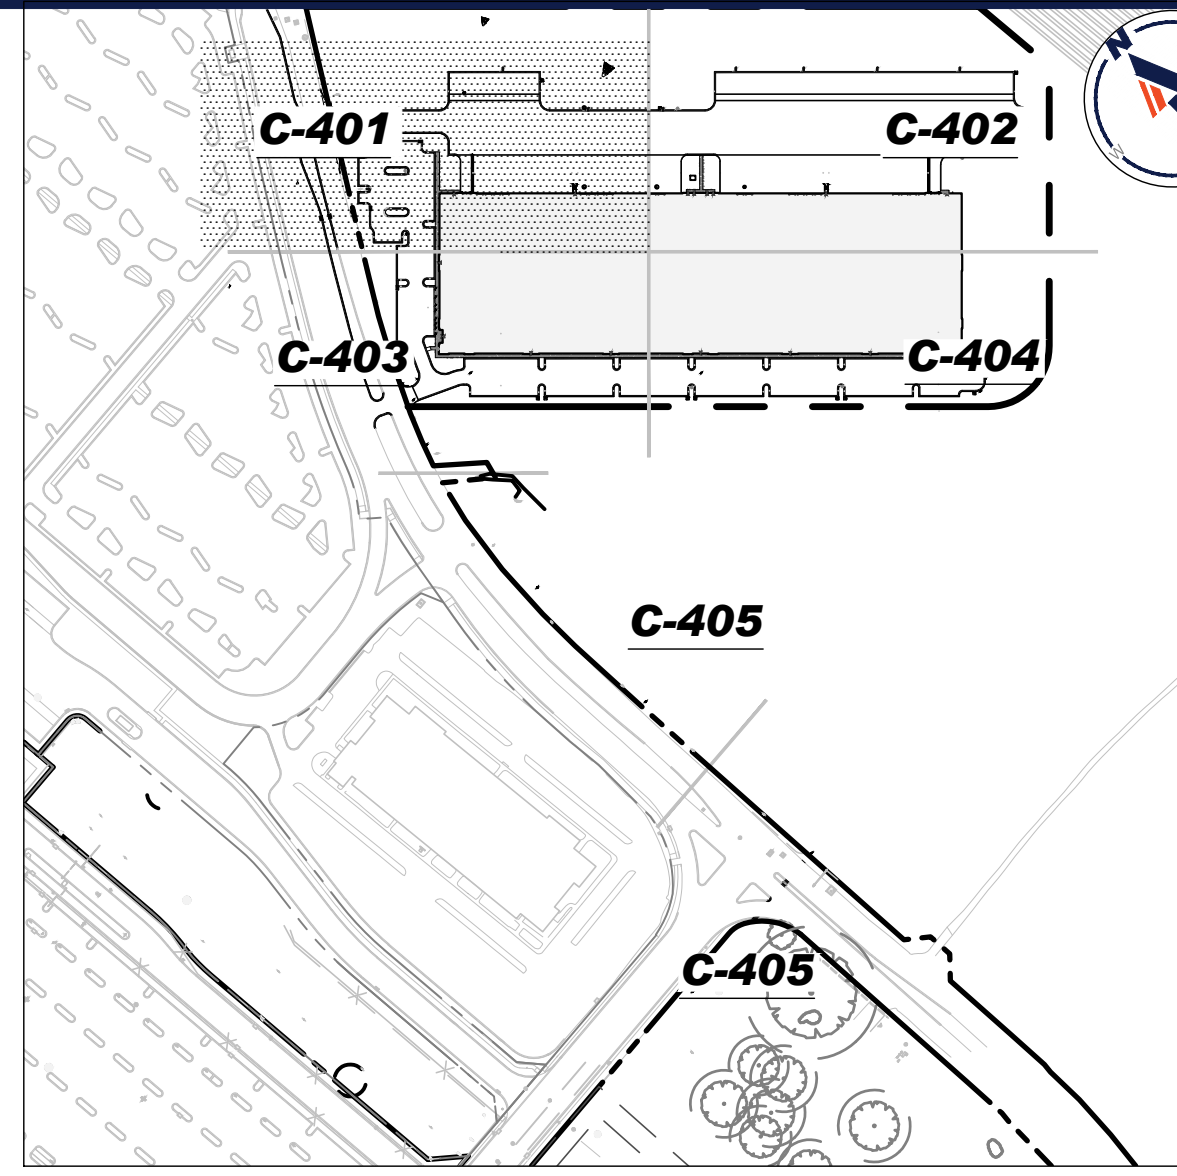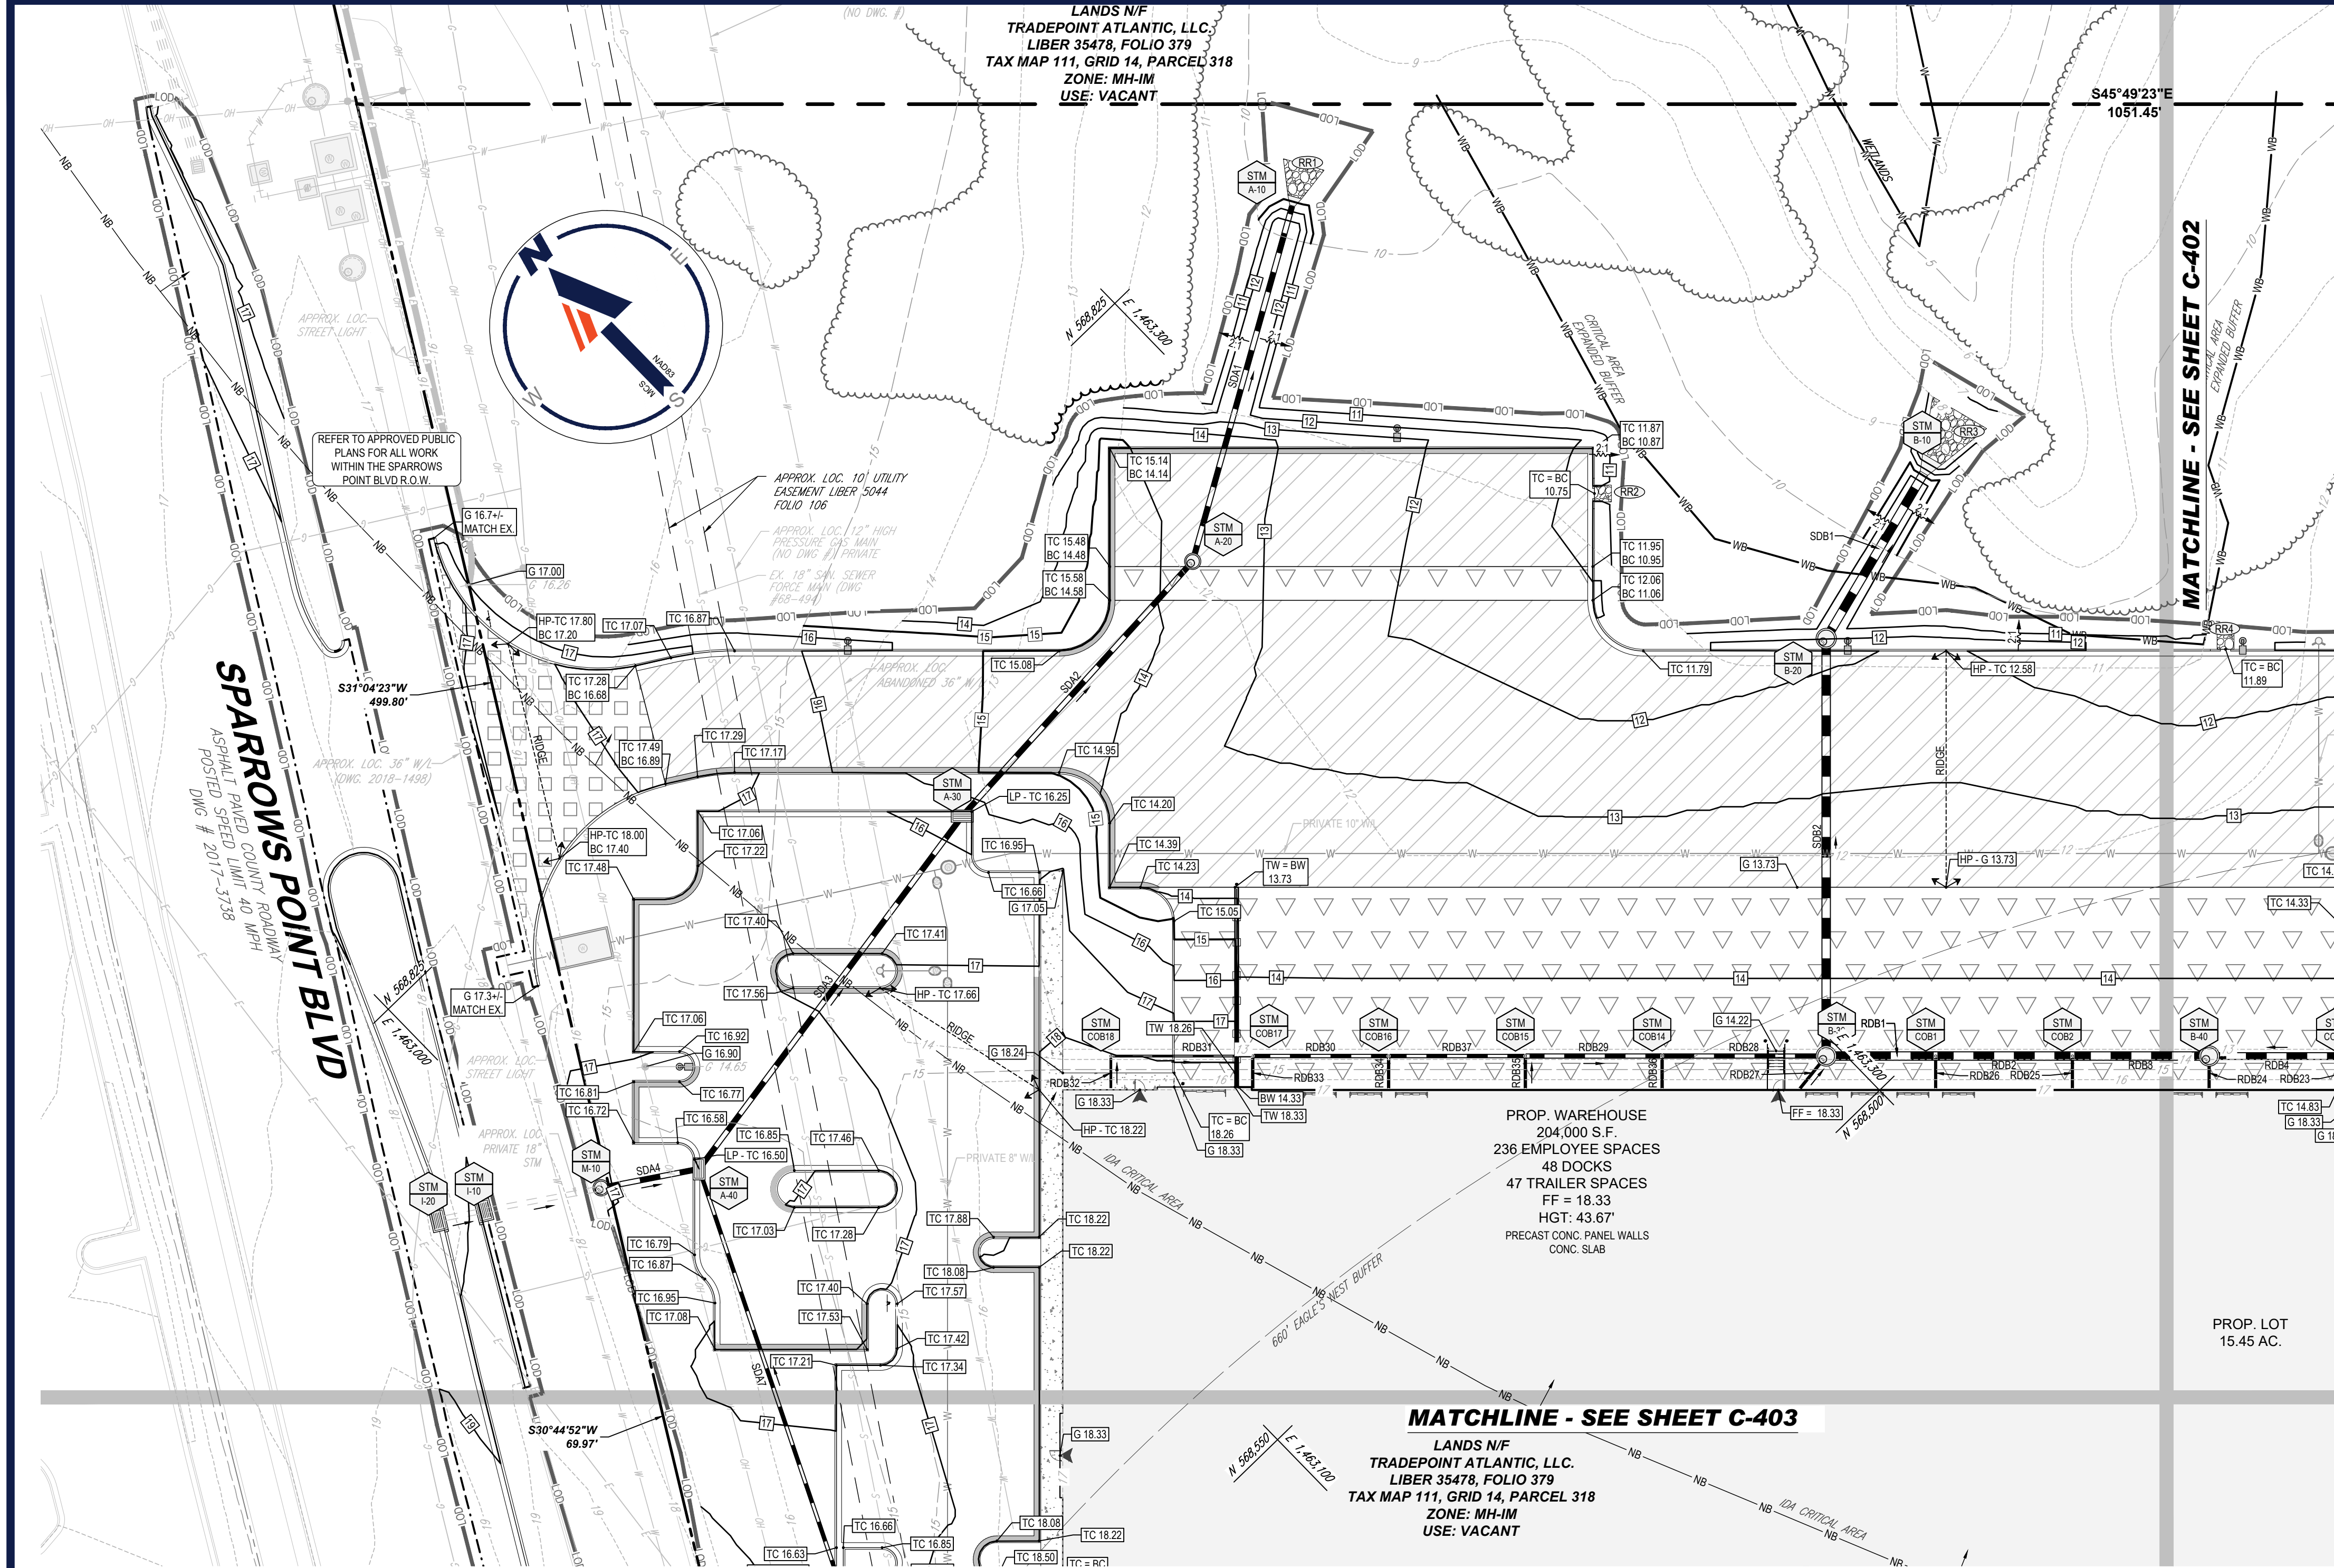

**KEY MAP**  
NOT TO SCALE

**PRIVATE STORM STRUCTURE SCHEDULE**


NAME	TYPE	RIM ELEV. (FT.)	INVERTS
A-10	ADS END SECTION	-	INV IN = 9.50' (18")
A-20	PRECAST MANHOLE (SHA STD. MD-384.01)	13.69'	INV IN = 10.43' (18") INV OUT = 10.33' (18")
A-30	DOUBLE TYPE S INLET (SHA STD. MD-374.70)	15.75'	INV IN = 11.65' (18") INV OUT = 11.55' (18")
A-40	DOUBLE TYPE S INLET (SHA STD. MD-374.70)	16.00'	INV IN = 13.10' (18") INV IN = 12.81' (12") INV OUT = 12.31' (18")
B-10	ADS END SECTION	-	INV IN = 7.10' (30")
B-20	PRECAST MANHOLE (SHA STD. MD-384.03)	11.95'	INV IN = 7.51' (30") INV OUT = 7.41' (30")
B-30	PRECAST MANHOLE (SHA STD. MD-384.03)	14.23'	INV IN = 8.23' (30") INV IN = 9.38' (15") INV IN = 12.10' (8") INV OUT = 8.13' (30")
COB1	CLEANOUTS	14.23'	INV IN = 8.40' (30") INV IN = 12.10' (8") INV OUT = 8.40' (30")
COB2	CLEANOUTS	14.23'	INV IN = 8.61' (30") INV IN = 12.10' (8") INV OUT = 8.61' (30")
COB14	CLEANOUTS	14.23'	INV IN = 9.94' (15") INV IN = 12.10' (8") INV OUT = 9.94' (15")
COB15	CLEANOUT	14.23'	INV IN = 10.70' (12") INV IN = 12.10' (8") INV OUT = 10.45' (15")
COB16	CLEANOUTS	14.23'	INV IN = 12.10' (8") INV IN = 11.20' (12") INV OUT = 11.20' (12")
COB17	CLEANOUTS	14.23'	INV IN = 11.95' (6") INV IN = 12.10' (8") INV OUT = 11.70' (12")
COB18	CLEANOUT	18.04'	INV IN = 16.09' (6") INV OUT = 13.63' (6")

**PRIVATE STORM SEWER PIPE SCHEDULE**

FROM	FROM INV	TO	TO INV	PIPE LENGTH	SLOPE (%)	DIAMETER (IN.)	MATERIAL	NO.
B-30	8.23'	COB1	8.40'	32.43'	0.52%	30"	HDPE	RDB1
COB1	8.40'	COB2	8.61'	40.50'	0.52%	30"	HDPE	RDB2
COB2	8.61'	B-40	8.82'	40.50'	0.52%	30"	HDPE	RDB3
B-40	9.36'	COB4	9.57'	40.25'	0.52%	24"	HDPE	RDB4
COB2	12.10'	RD-COB2	12.20'	10.00'	1.00%	8"	HDPE	RDB25
COB1	12.10'	RD-COB1	12.20'	10.00'	1.00%	8"	HDPE	RDB26
B-30	12.10'	RD-B-30	12.20'	12.85'	0.78%	8"	HDPE	RDB27
B-30	9.38'	COB14	9.94'	48.57'	1.15%	15"	HDPE	RDB28
COB14	9.94'	COB15	10.45'	40.50'	1.26%	15"	HDPE	RDB29
COB16	11.20'	COB17	11.70'	40.25'	1.24%	12"	HDPE	RDB30
COB17	11.95'	COB18	13.63'	42.00'	4.00%	6"	HDPE	RDB31
COB18	16.09'	RD-COB18	16.19'	10.00'	1.00%	6"	HDPE	RDB32
COB17	12.10'	RD-COB17	12.20'	10.00'	1.00%	8"	HDPE	RDB33
COB16	12.10'	RD-COB16	12.20'	10.00'	1.00%	8"	HDPE	RDB34
COB15	12.10'	RD-COB15	12.20'	10.00'	1.00%	8"	HDPE	RDB35
COB14	12.10'	RD-COB14	12.20'	10.00'	1.00%	8"	HDPE	RDB36
COB15	10.70'	COB16	11.20'	40.50'	1.23%	12"	HDPE	RDB37
A-10	9.50'	A-20	10.33'	112.10'	0.74%	18"	HDPE	SDA1
A-20	10.43'	A-30	11.55'	101.73'	1.10%	18"	HDPE	SDA2
A-30	11.65'	A-40	12.31'	130.37'	0.51%	18"	HDPE	SDA3

**OWNER / DEVELOPER**

TRADEPOINT ATLANTIC, LLC  
6995 BETHLEHEM BOULEVARD  
BALTIMORE, MD 21219  
CONTACT: ISAAC ROBINSON  
PHONE: 302-377-6094



MARYLAND COORDINATE SYSTEM (MCS)

**RIP-RAP SCHEDULE**

SYM	DESCRIPTION	MDE DTL	LENGTH	BOTTOM WIDTH	THICKNESS	D <sub>50</sub>	D <sub>MAX</sub>
(RR1)	CLASS 1 RIPRAP ON NONWOVEN GEOTEXTILE	D-4-1-C	10'	11.5'	19"	9.5"	15"
(RR2)	CLASS 1 RIPRAP ON NONWOVEN GEOTEXTILE	D-4-1-C	5'	5'	19"	9.5"	15"
(RR3)	CLASS 1 RIPRAP ON NONWOVEN GEOTEXTILE	D-4-1-C	16'	18.5'	19"	9.5"	15"

**LEGEND**

- STANDARD DUTY ASPHALT PAVEMENT
- HEAVY DUTY ASPHALT PAVEMENT
- HEAVY DUTY CONCRETE PAVEMENT
- BALTIMORE COUNTY CONCRETE ENTRANCE
- CONCRETE SIDEWALK

**LEGEND**

- EXISTING NOTE
- TYPICAL NOTE TEXT
- ON-SITE PROPERTY LINE / R.O.W. LINE
- CONTOUR LINE
- SPOT ELEVATIONS
- SANITARY SEWER LINE
- UNDERGROUND WATER LINE
- INDUSTRIAL WATER LINE
- UNDERGROUND ELECTRIC LINE
- UNDERGROUND GAS LINE
- OVERHEAD WIRE
- UNDERGROUND TELEPHONE LINE
- STORM SEWER
- SANITARY SEWER FORCE MAIN
- LIMIT OF DISTURBANCE
- IDA CRITICAL AREA BOUNDARY
- CONCRETE CURB & GUTTER
- NONTIDAL WETLANDS
- CRITICAL AREA EXPANDED BUFFER
- FOREST BUFFER
- PROPOSED NOTE
- TC 516.00
- TC 516.00
- TC 515.50
- TC 515.50
- CURB AND GUTTER
- SPILL CURB



**REVISIONS**

REV	DATE	COMMENT	CHECKED BY
1	4/5/23	REV PER CLIENT COMMENTS	RMS MJG



THIS DRAWING IS INTENDED FOR MUNICIPAL AND/OR AGENCY REVIEW AND APPROVAL. IT IS NOT INTENDED AS A CONSTRUCTION DOCUMENT UNLESS INDICATED OTHERWISE.

PROJECT No.: MDA220034.00  
DRAWN BY: RMS/DMJ  
CHECKED BY: JCB  
DATE: 3/31/23  
CAD ID: 1

**PHASE II PLANS**

FOR  
**TRADEPOINT ATLANTIC**  
PROJECT SANDLOT  
1651 SPARROWS POINT BLVD  
BALTIMORE, MD 21219  
TAX MAP 111, GRID 14, PARCEL 318  
ELECTION DISTRICT 15  
COUNCILMANIC DISTRICT 7  
BALTIMORE COUNTY



**M.J. GESELL**  
PROFESSIONAL ENGINEER  
MARYLAND LICENSE NO. 4409  
PROFESSIONAL CERTIFICATION  
I, MICHAEL J. GESELL, HEREBY CERTIFY THAT THESE DOCUMENTS WERE PREPARED OR APPROVED BY ME, AND THAT I AM A DULY LICENSED PROFESSIONAL ENGINEER UNDER THE LAWS OF THE STATE OF MARYLAND. LICENSE NO. 4409, EXPIRATION DATE: 6/30/23



SHEET TITLE:

**FINAL GRADING PLAN**

SHEET NUMBER:  
**C-401**

MDE PROJECT NO. 23-SF-



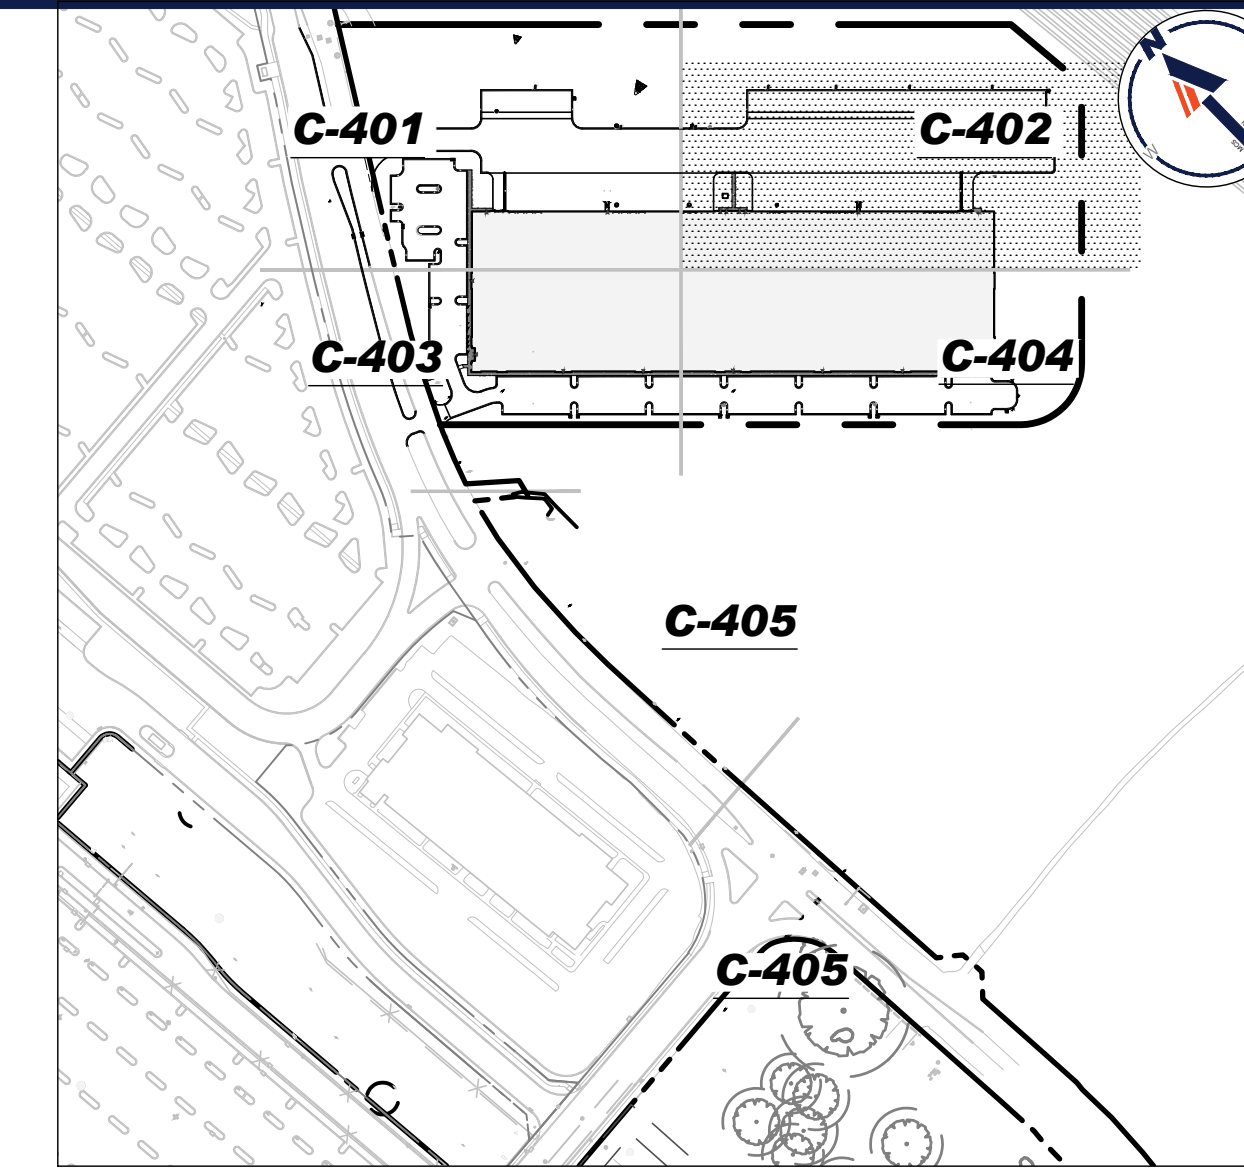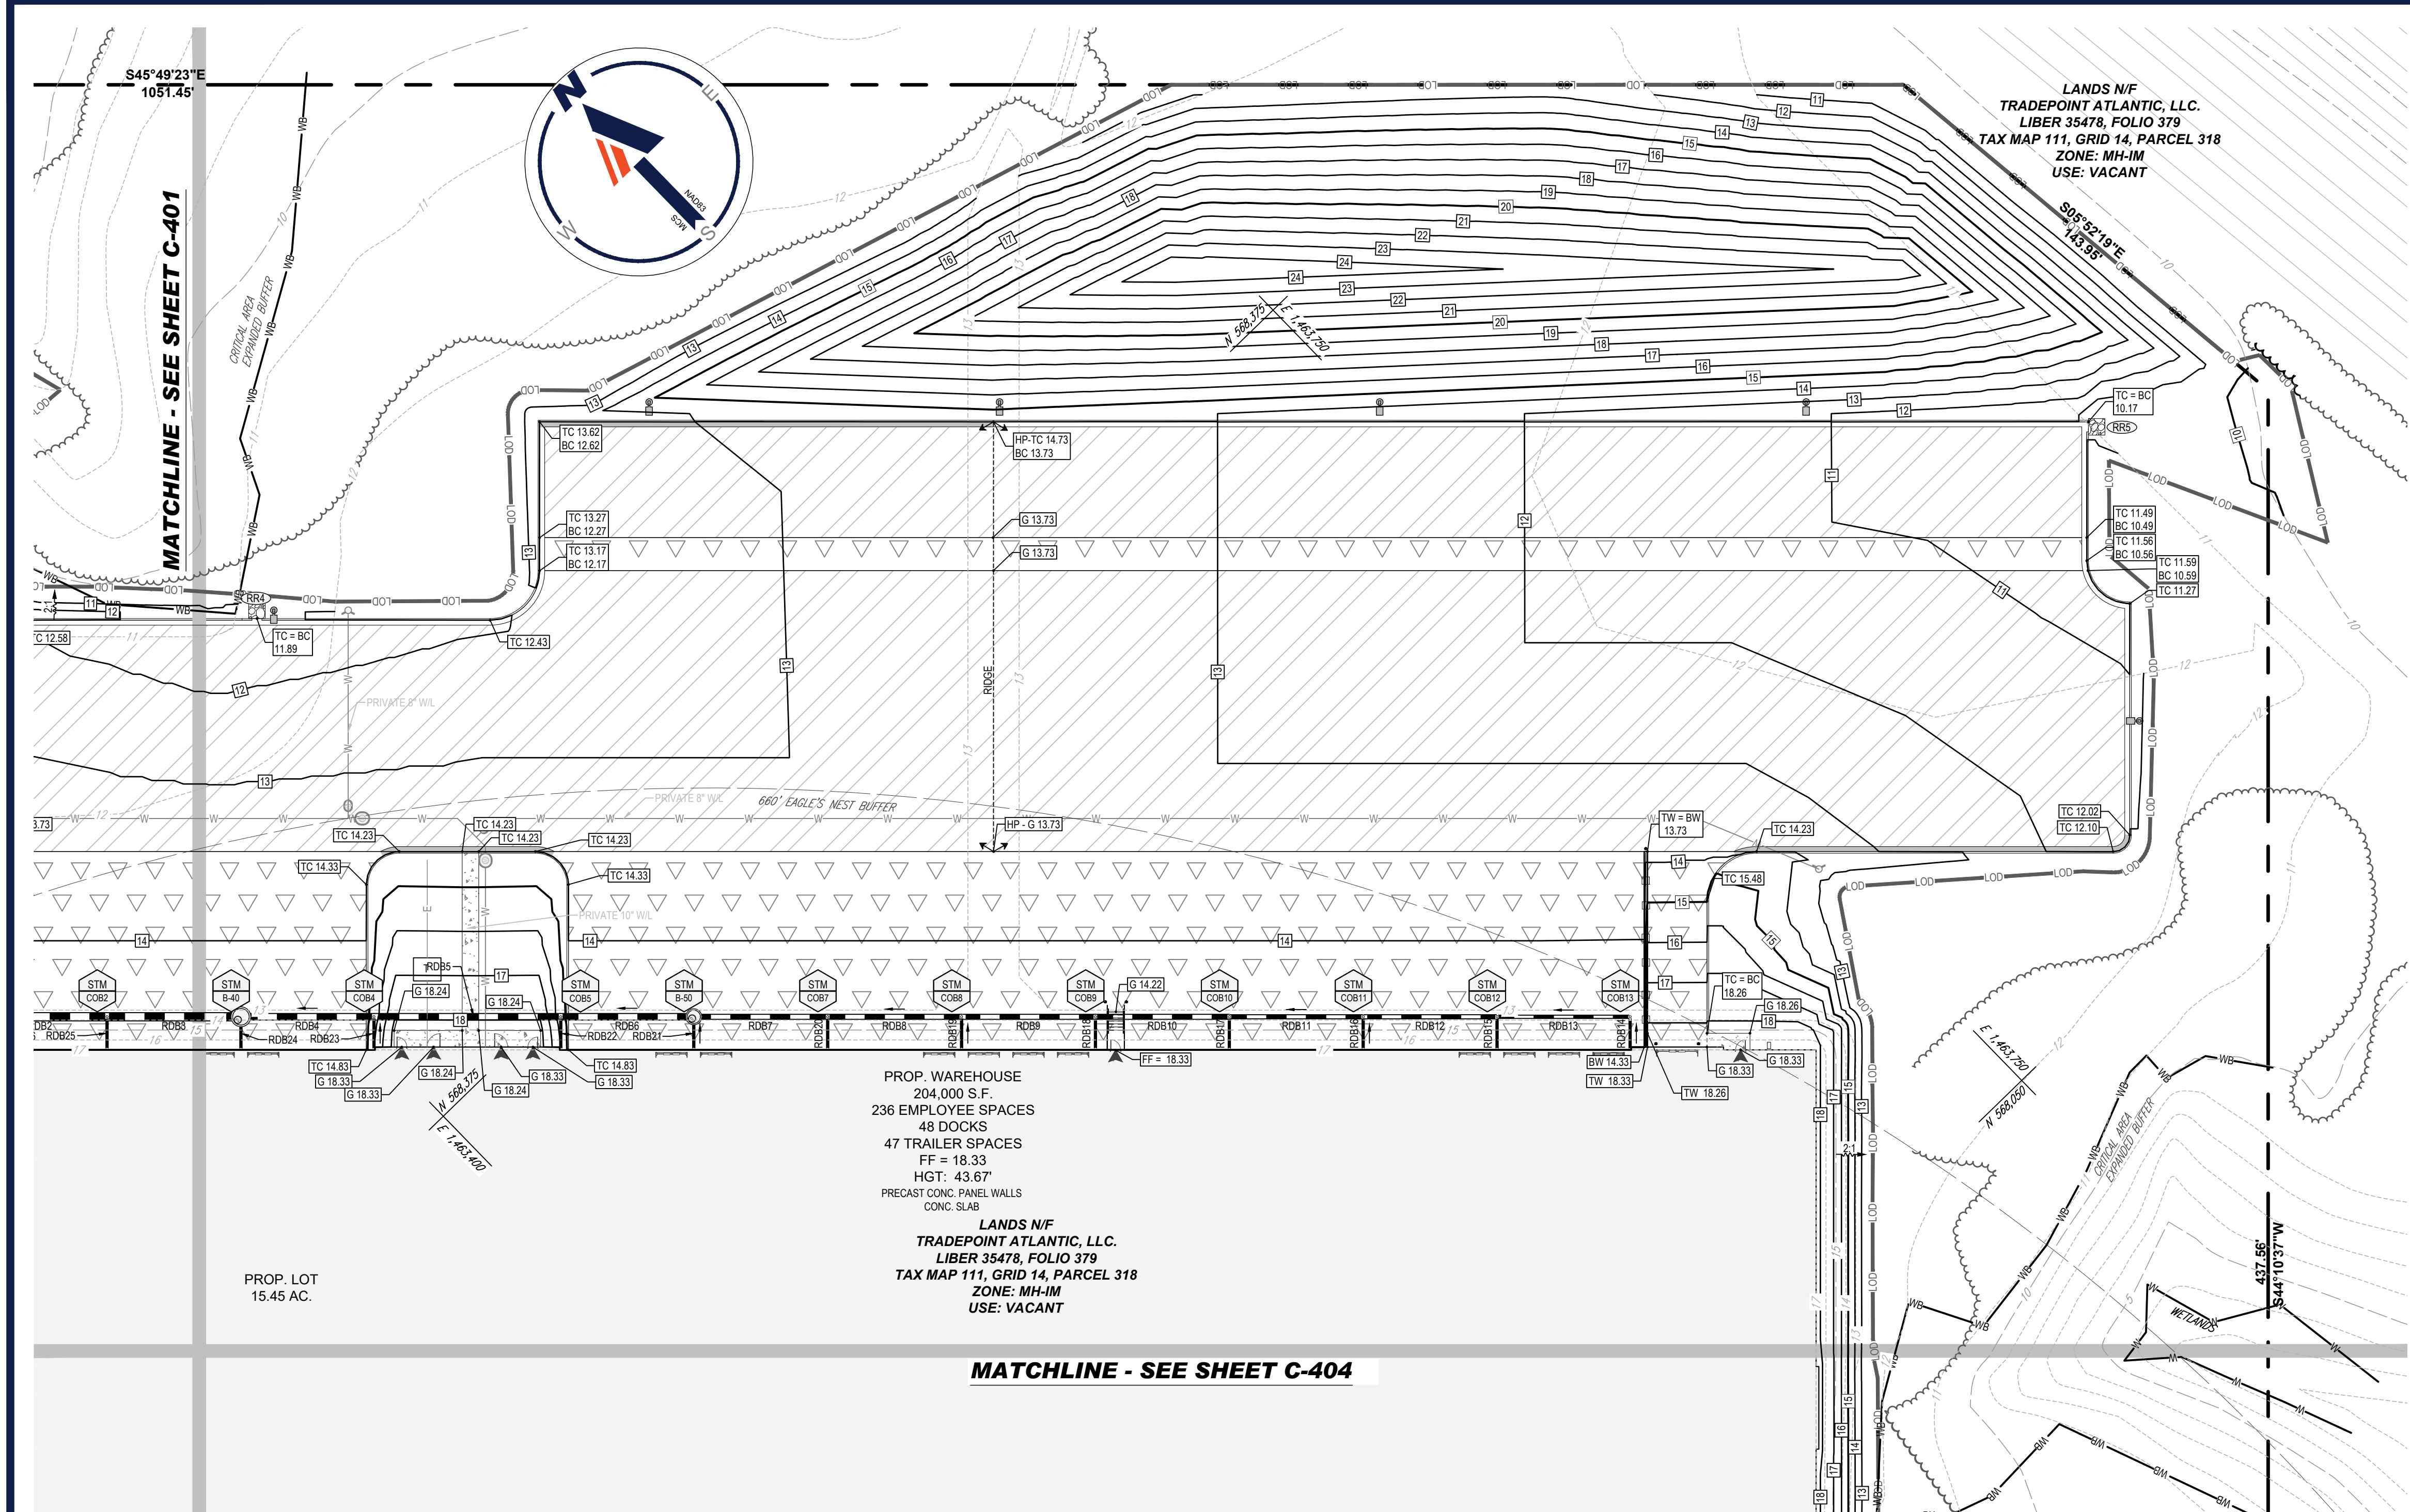

**PRIVATE STORM STRUCTURE SCHEDULE**


NAME	TYPE	RIM ELEV. (FT.)	INVERTS
B-40	PRECAST MANHOLE (SHA STD. MD-384.03)	14.23'	INV IN = 9.36' (24") INV IN = 12.10' (8") INV OUT = 8.82' (30")
B-50	PRECAST MANHOLE (SHA STD. MD-384.01)	14.23'	INV IN = 10.57' (18") INV IN = 12.10' (8") INV OUT = 10.07' (24")
COB4	CLEANOUT	15.48'	INV IN = 9.57' (24") INV IN = 12.10' (8") INV OUT = 9.57' (24")
COB5	CLEANOUTS	15.48'	INV IN = 9.86' (24") INV IN = 12.10' (8") INV OUT = 9.86' (24")
COB7	CLEANOUTS	14.23'	INV IN = 10.78' (18") INV IN = 12.10' (8") INV OUT = 10.78' (18")
COB8	CLEANOUT	14.23'	INV IN = 10.99' (18") INV IN = 12.10' (8") INV OUT = 10.99' (18")
COB9	CLEANOUTS	14.23'	INV IN = 11.20' (18") INV IN = 12.10' (8") INV OUT = 11.20' (18")
COB10	CLEANOUTS	14.23'	INV IN = 11.41' (15") INV IN = 12.10' (8") INV OUT = 11.41' (18")
COB11	CLEANOUT	14.23'	INV IN = 11.62' (15") INV IN = 12.10' (8") INV OUT = 11.62' (15")
COB12	CLEANOUTS	14.23'	INV IN = 11.95' (12") INV IN = 12.10' (8") INV OUT = 11.83' (15")
COB13	CLEANOUT	14.23'	INV IN = 12.33' (8") INV OUT = 12.16' (12")

**PRIVATE STORM SEWER PIPE SCHEDULE**


FROM	FROM INV	TO	TO INV	PIPE LENGTH	SLOPE (%)	DIAMETER (IN.)	MATERIAL	NO.
B-40	9.36'	COB4	9.57'	40.25'	0.52%	24"	HDPE	RDB4
COB4	9.57'	COB5	9.86'	56.50'	0.51%	24"	HDPE	RDB5
COB5	9.86'	B-50	10.07'	40.25'	0.52%	24"	HDPE	RDB6
B-50	10.57'	COB7	10.78'	40.50'	0.52%	18"	HDPE	RDB7
COB7	10.78'	COB8	10.99'	40.50'	0.52%	18"	HDPE	RDB8
COB8	10.99'	COB9	11.20'	40.50'	0.52%	18"	HDPE	RDB9
COB9	11.20'	COB10	11.41'	40.50'	0.52%	18"	HDPE	RDB10
COB10	11.41'	COB11	11.62'	40.50'	0.52%	15"	HDPE	RDB11
COB11	11.62'	COB13	12.16'	40.25'	0.52%	12"	HDPE	RDB13
COB13	12.33'	RD-COB13	12.43'	10.00'	1.00%	8"	HDPE	RDB14
COB11	12.10'	RD-COB11	12.20'	10.00'	1.00%	8"	HDPE	RDB16
COB9	12.10'	RD-COB9	12.20'	10.00'	1.00%	8"	HDPE	RDB18
COB8	12.10'	RD-COB8	12.20'	10.00'	1.00%	8"	HDPE	RDB19
COB7	12.10'	RD-COB7	12.20'	10.00'	1.00%	8"	HDPE	RDB20
B-50	12.10'	RD-COB6	12.20'	10.00'	1.00%	8"	HDPE	RDB21
COB5	12.10'	RD-COB5	12.20'	10.00'	1.00%	8"	HDPE	RDB22
COB4	12.10'	RD-COB4	12.20'	10.00'	1.00%	8"	HDPE	RDB23
B-40	12.10'	RD-COB3	12.20'	10.00'	1.00%	8"	HDPE	RDB24

**RIP-RAP SCHEDULE**

SYM	DESCRIPTION	MDE DTL	LENGTH	BOTTOM WIDTH	THICKNESS	D <sub>50</sub>	D <sub>MAX</sub>
RR1	CLASS I RIPRAP ON NONWOVEN GEOTEXTILE	D-4-1-C	5'	5'	19"	9.5"	15"
RR2	CLASS I RIPRAP ON NONWOVEN GEOTEXTILE	D-4-1-C	5'	5'	19"	9.5"	15"

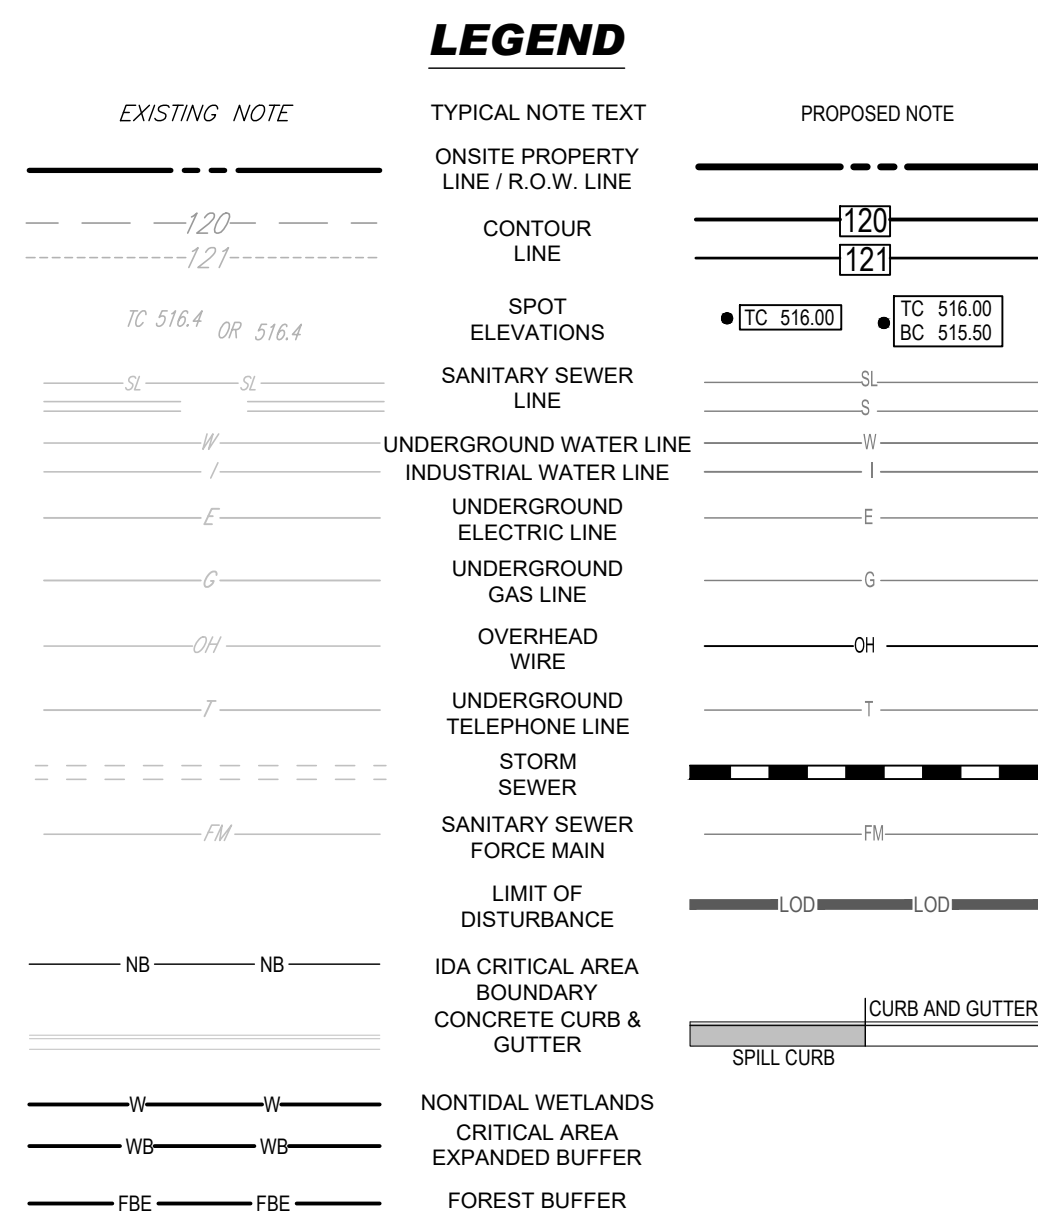

**OWNER / DEVELOPER**  
 TRADEPOINT ATLANTIC, LLC  
 6995 BETHLEHEM BOULEVARD  
 BALTIMORE, MD 21219  
 CONTACT: ISAAC ROBINSON  
 PHONE: 302-377-6094



**MARYLAND COORDINATE SYSTEM (MCS)**

GRADING 3 OF 6

LIMIT OF DISTURBANCE: 555,400 S.F. OR 12.75 AC.

**BOHLER**  
 SITE CIVIL AND CONSULTING ENGINEERING  
 PROGRAM MANAGEMENT  
 LANDSCAPE ARCHITECTURE  
 SUSTAINABLE DESIGN  
 PERMITTING SERVICES  
 TRANSPORTATION SERVICES

**REVISIONS**

REV	DATE	COMMENT	DRAWN BY	CHECKED BY
1	4/5/23	PER REV CLIENT COMMENTS	RMS	MJG

**811**  
 Know what's below.  
 Call before you dig.  
 ALWAYS CALL 811  
 It's fast. It's free. It's the law.

PROJECT No.: MDA220034.00  
 DRAWN BY: RMS/DMD  
 CHECKED BY: JCB  
 DATE: 3/31/23  
 CAD ID: 1

**PHASE II PLANS**  
 FOR  
**TRADEPOINT ATLANTIC**  
 PROJECT SANDLOT  
 1651 SPARROWS POINT BLVD  
 BALTIMORE, MD 21219  
 TAX MAP 111, GRID 14, PARCEL 318  
 ELECTION DISTRICT 15  
 COUNCILMANIC DISTRICT 7  
 BALTIMORE COUNTY



**BOHLER**  
 901 DULANEY VALLEY ROAD, SUITE 801  
 TOWSON, MARYLAND 21284  
 Phone: (410) 821-7900  
 Fax: (410) 821-7987  
 JBASS@BOHLERENG.COM

**M.J. GESELL**  
 PROFESSIONAL ENGINEER  
 MARYLAND LICENSE No. 4403  
 PROFESSIONAL CERTIFICATION  
 I, MICHAEL J. GESELL, HEREBY CERTIFY THAT THESE DOCUMENTS WERE PREPARED OR APPROVED BY ME, AND THAT I AM A DULY LICENSED PROFESSIONAL ENGINEER UNDER THE LAWS OF THE STATE OF MARYLAND. LICENSE NO. 4403, EXPIRATION DATE: 6/30/23

SHEET TITLE:  
**FINAL GRADING PLAN**  
 SHEET NUMBER:  
**C-402**  
 MDE PROJECT NO. 23-SF-\_\_\_\_\_

APR 05, 2023  
 C:\PROG\AMT\BID\A\162022\22\22\22\TEMP\PCP\BIBL\1244\AM20230304.00\GRAD-1-1-A\JOINT\_C-402-GRAD



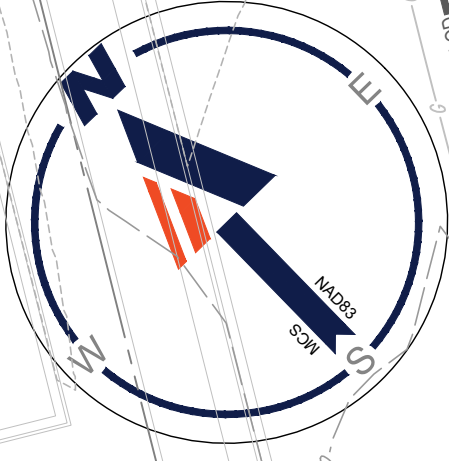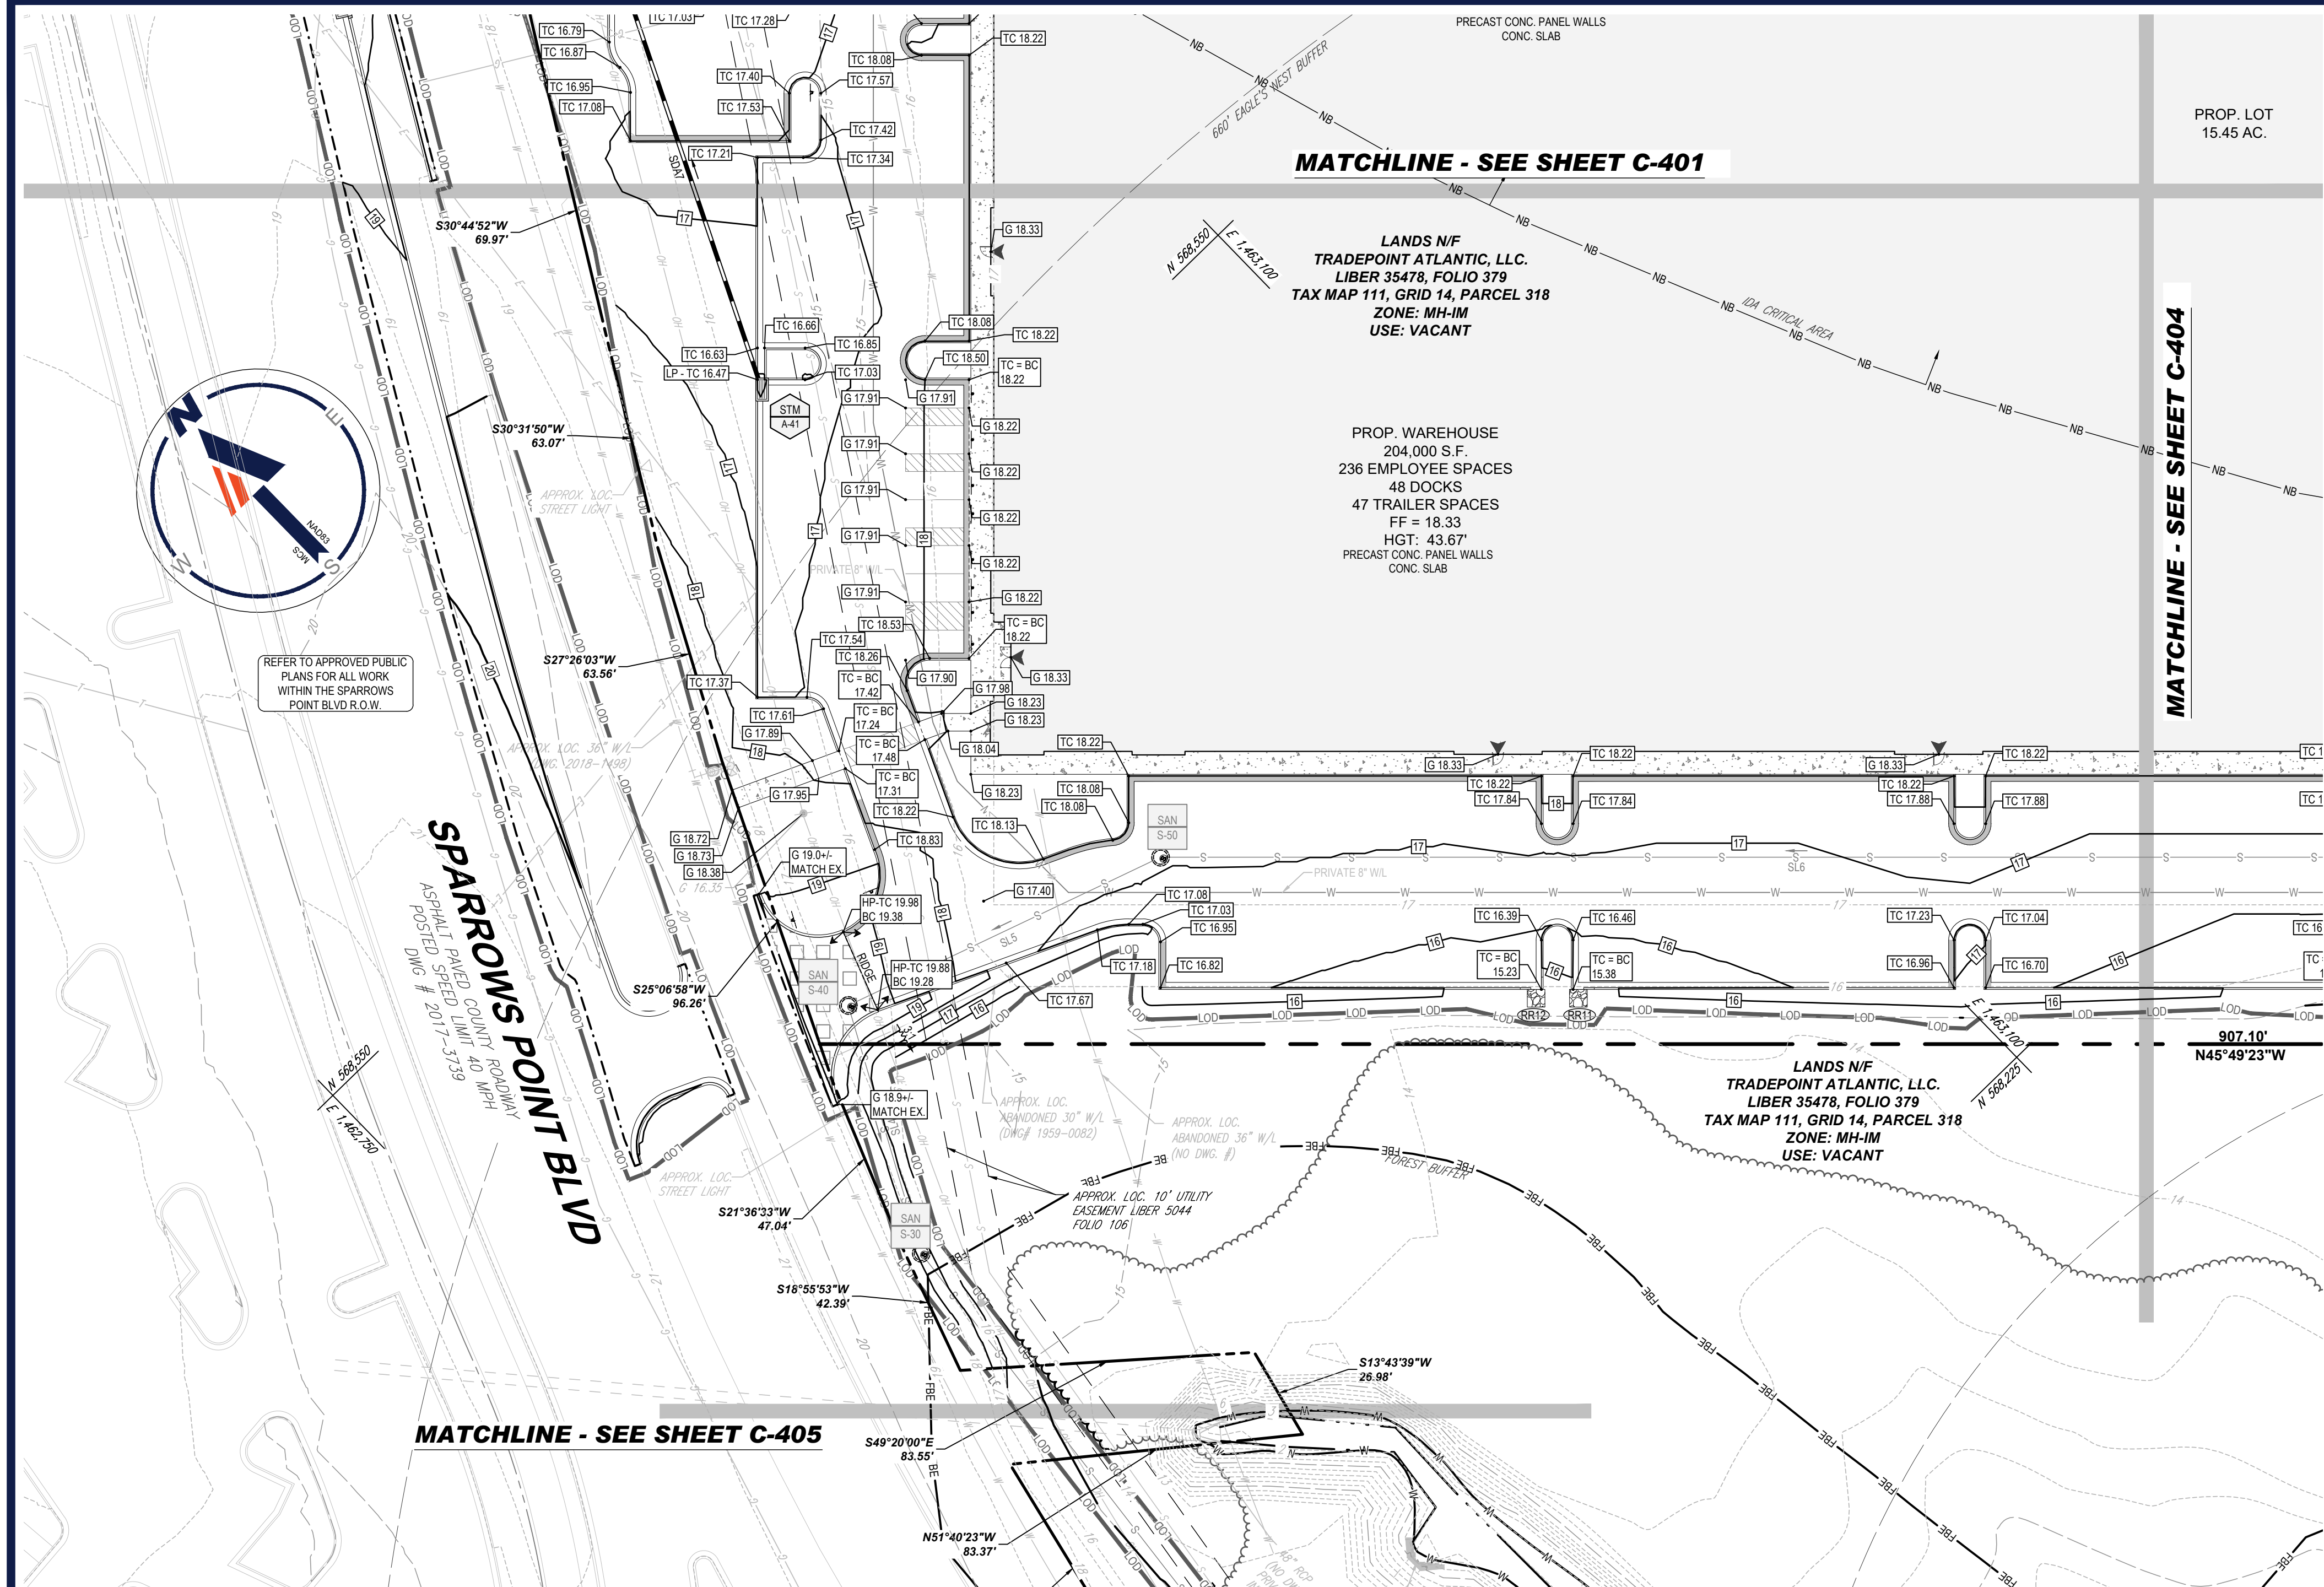

REFER TO APPROVED PUBLIC PLANS FOR ALL WORK WITHIN THE SPARROWS POINT BLVD R.O.W.

SPARROWS POINT BLVD  
ASPHALT PAVED COUNTY 40 MPH  
POSTED DMC # 2017-379

MATCHLINE - SEE SHEET C-401


MATCHLINE - SEE SHEET C-404

MATCHLINE - SEE SHEET C-405

LANDS N/F  
TRADEPOINT ATLANTIC, LLC.  
LIBER 35478, FOLIO 379  
TAX MAP 111, GRID 14, PARCEL 318  
ZONE: MH-IM  
USE: VACANT

PROP. WAREHOUSE  
204,000 S.F.  
236 EMPLOYEE SPACES  
48 DOCKS  
47 TRAILER SPACES  
FF = 18.33  
HGT: 43.67'  
PRECAST CONC. PANEL WALLS  
CONC. SLAB

LANDS N/F  
TRADEPOINT ATLANTIC, LLC.  
LIBER 35478, FOLIO 379  
TAX MAP 111, GRID 14, PARCEL 318  
ZONE: MH-IM  
USE: VACANT

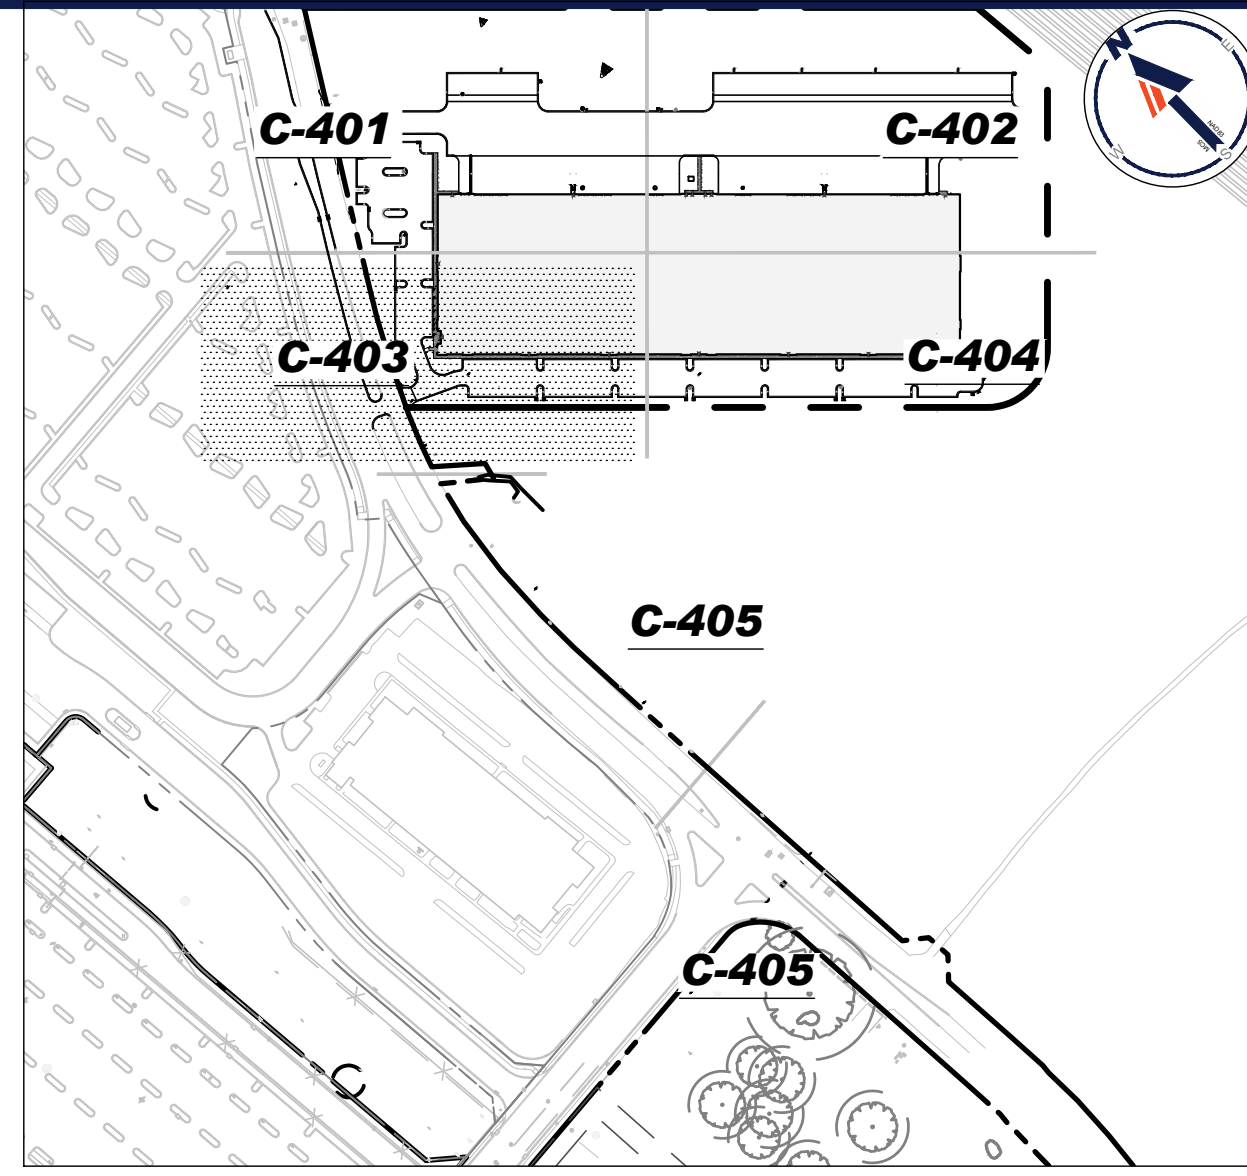

KEY MAP  
NOT TO SCALE

PRIVATE STORM STRUCTURE SCHEDULE

NAME	TYPE	RIM ELEV. (FT.)	INVERTS
A-41	DOUBLE TYPE S INLET (SHA STD. MD-374.70)	15.97'	INV OUT = 13.47' (12')

**LEGEND**


	EXISTING NOTE		TYPICAL NOTE TEXT		PROPOSED NOTE
	ONSITE PROPERTY LINE / R.O.W. LINE		CONTOUR LINE		SPOT ELEVATIONS
	SANITARY SEWER LINE		UNDERGROUND WATER LINE		INDUSTRIAL WATER LINE
	UNDERGROUND ELECTRIC LINE		UNDERGROUND GAS LINE		OVERHEAD WIRE
	UNDERGROUND TELEPHONE LINE		STORM SEWER		SANITARY SEWER FORCE MAIN
	LIMIT OF DISTURBANCE		IDA CRITICAL AREA BOUNDARY		CONCRETE CURB & GUTTER
	NONTIDAL WETLANDS CRITICAL AREA EXPANDED BUFFER		FOREST BUFFER		SPILL CURB

**RIP-RAP SCHEDULE**

SYM	DESCRIPTION	MDE DTL	LENGTH	BOTTOM WIDTH	THICKNESS	D <sub>50</sub>	D <sub>max</sub>
	CLASS I RIPRAP ON NONWOVEN GEOTEXTILE	D-4-1-C	5'	5'	19"	9.5"	15"
	CLASS I RIPRAP ON NONWOVEN GEOTEXTILE	D-4-1-C	5'	5'	19"	9.5"	15"

OWNER / DEVELOPER

TRADEPOINT ATLANTIC, LLC.  
6995 BETHLEHEM BOULEVARD  
BALTIMORE, MD 21219  
CONTACT: ISAAC ROBINSON  
PHONE: 302-377-6094



MARYLAND COORDINATE SYSTEM (MCS)

**BOHLER**  
SITE CIVIL AND CONSULTING ENGINEERING  
PROGRAM MANAGEMENT  
LANDSCAPE ARCHITECTURE  
SUSTAINABLE DESIGN  
PERMITTING SERVICES  
TRANSPORTATION SERVICES

**REVISIONS**

REV	DATE	COMMENT	CHECKED BY
1	4/5/23	REV PER CLIENT COMMENTS	RMS MJG

**811**  
Know what's below.  
Call before you dig.  
ALWAYS CALL 811  
It's fast. It's free. It's the law.

THIS DRAWING IS INTENDED FOR MUNICIPAL AND/OR AGENCY REVIEW AND APPROVAL. IT IS NOT INTENDED AS A CONSTRUCTION DOCUMENT UNLESS INDICATED OTHERWISE.

PROJECT No.: MDA220034.00  
DRAWN BY: RMS/DMD  
CHECKED BY: JCB  
DATE: 3/31/23  
CAD ID: 1

PHASE II PLANS

FOR

**TRADEPOINT ATLANTIC**

PROJECT SANDLOT  
1651 SPARROWS POINT BLVD  
BALTIMORE, MD 21219  
TAX MAP 111, GRID 14, PARCEL 318  
ELECTION DISTRICT 15  
COUNCILMANIC DISTRICT 7  
BALTIMORE COUNTY

**BOHLER**  
901 DULANEY VALLEY ROAD, SUITE 801  
TOWSON, MARYLAND 21204  
Phone: (410) 821-7900  
Fax: (410) 821-7987  
JBASS@BOHLERENG.COM

**M.J. GESELL**  
PROFESSIONAL ENGINEER  
MARYLAND LICENSE # 44097  
PROFESSIONAL CERTIFICATION  
I, MICHAEL J. GESELL, HEREBY CERTIFY THAT THESE DOCUMENTS WERE PREPARED OR APPROVED BY ME, AND THAT I AM A DULY LICENSED PROFESSIONAL ENGINEER UNDER THE LAWS OF THE STATE OF MARYLAND. LICENSE NO. 44097, EXPIRATION DATE: 6/30/23

FINAL GRADING PLAN

SHEET NUMBER:  
**C-403**

MDE PROJECT NO. 23-SF-



PRECAST CONC. PANEL WALLS  
CONC. SLAB

LANDS N/F  
TRADEPOINT ATLANTIC, LLC.  
LIBER 35478, FOLIO 379  
TAX MAP 111, GRID 14, PARCEL 318  
ZONE: MH-IM  
USE: VACANT



PROP. LOT  
15.45 AC.

MATCHLINE - SEE SHEET C-402

PROP. WAREHOUSE  
204,000 S.F.  
236 EMPLOYEE SPACES  
48 DOCKS  
47 TRAILER SPACES  
FF = 18.33  
HGT: 43.67'  
PRECAST CONC. PANEL WALLS  
CONC. SLAB

LANDS N/F  
TRADEPOINT ATLANTIC, LLC.  
LIBER 35478, FOLIO 379  
TAX MAP 111, GRID 14, PARCEL 318  
ZONE: MH-IM  
USE: VACANT

MATCHLINE - SEE SHEET C-403

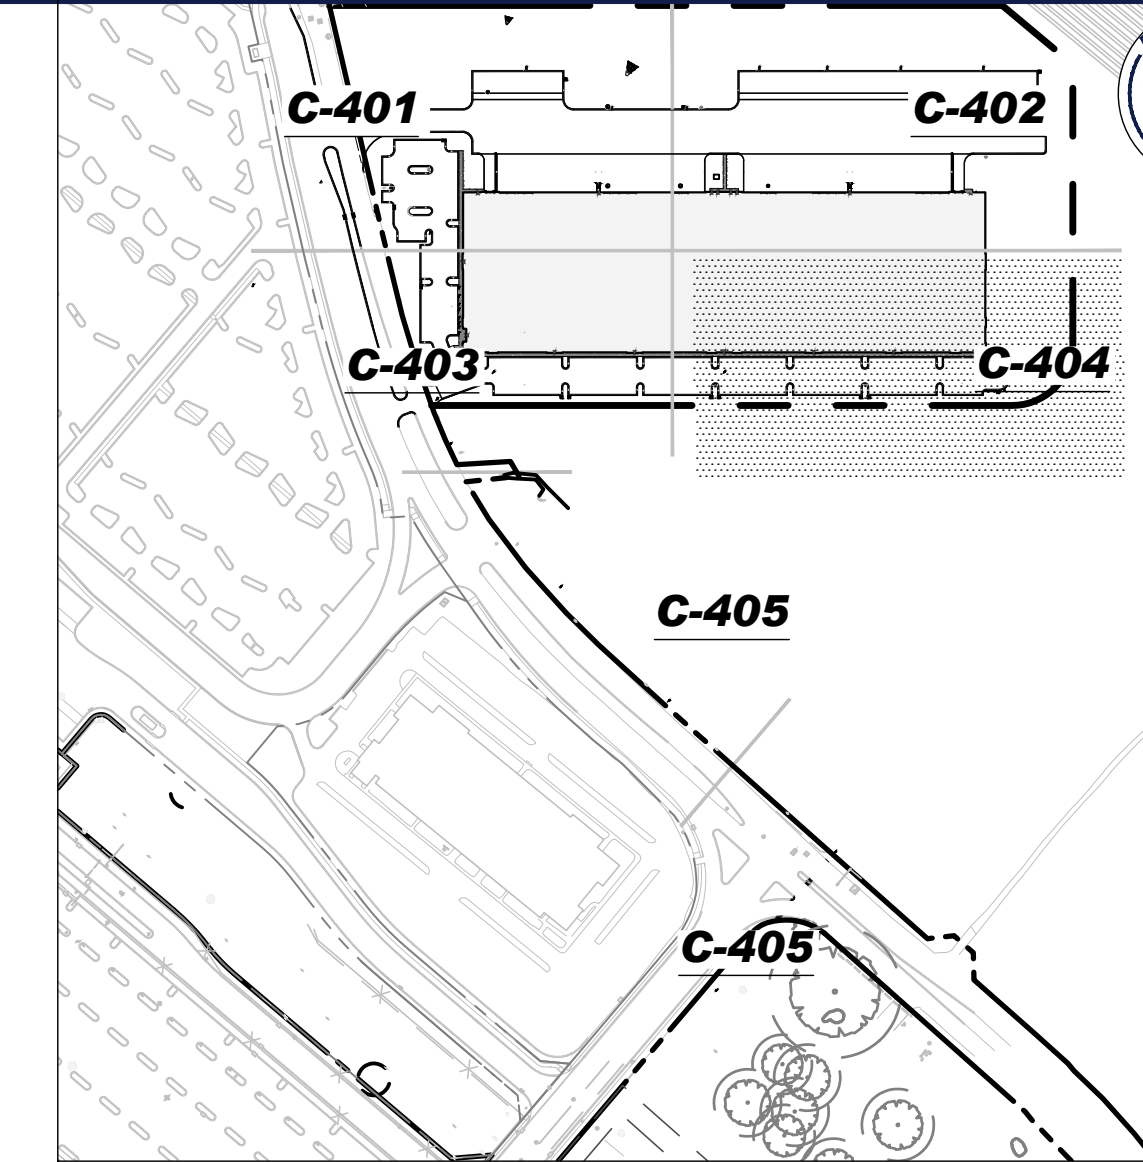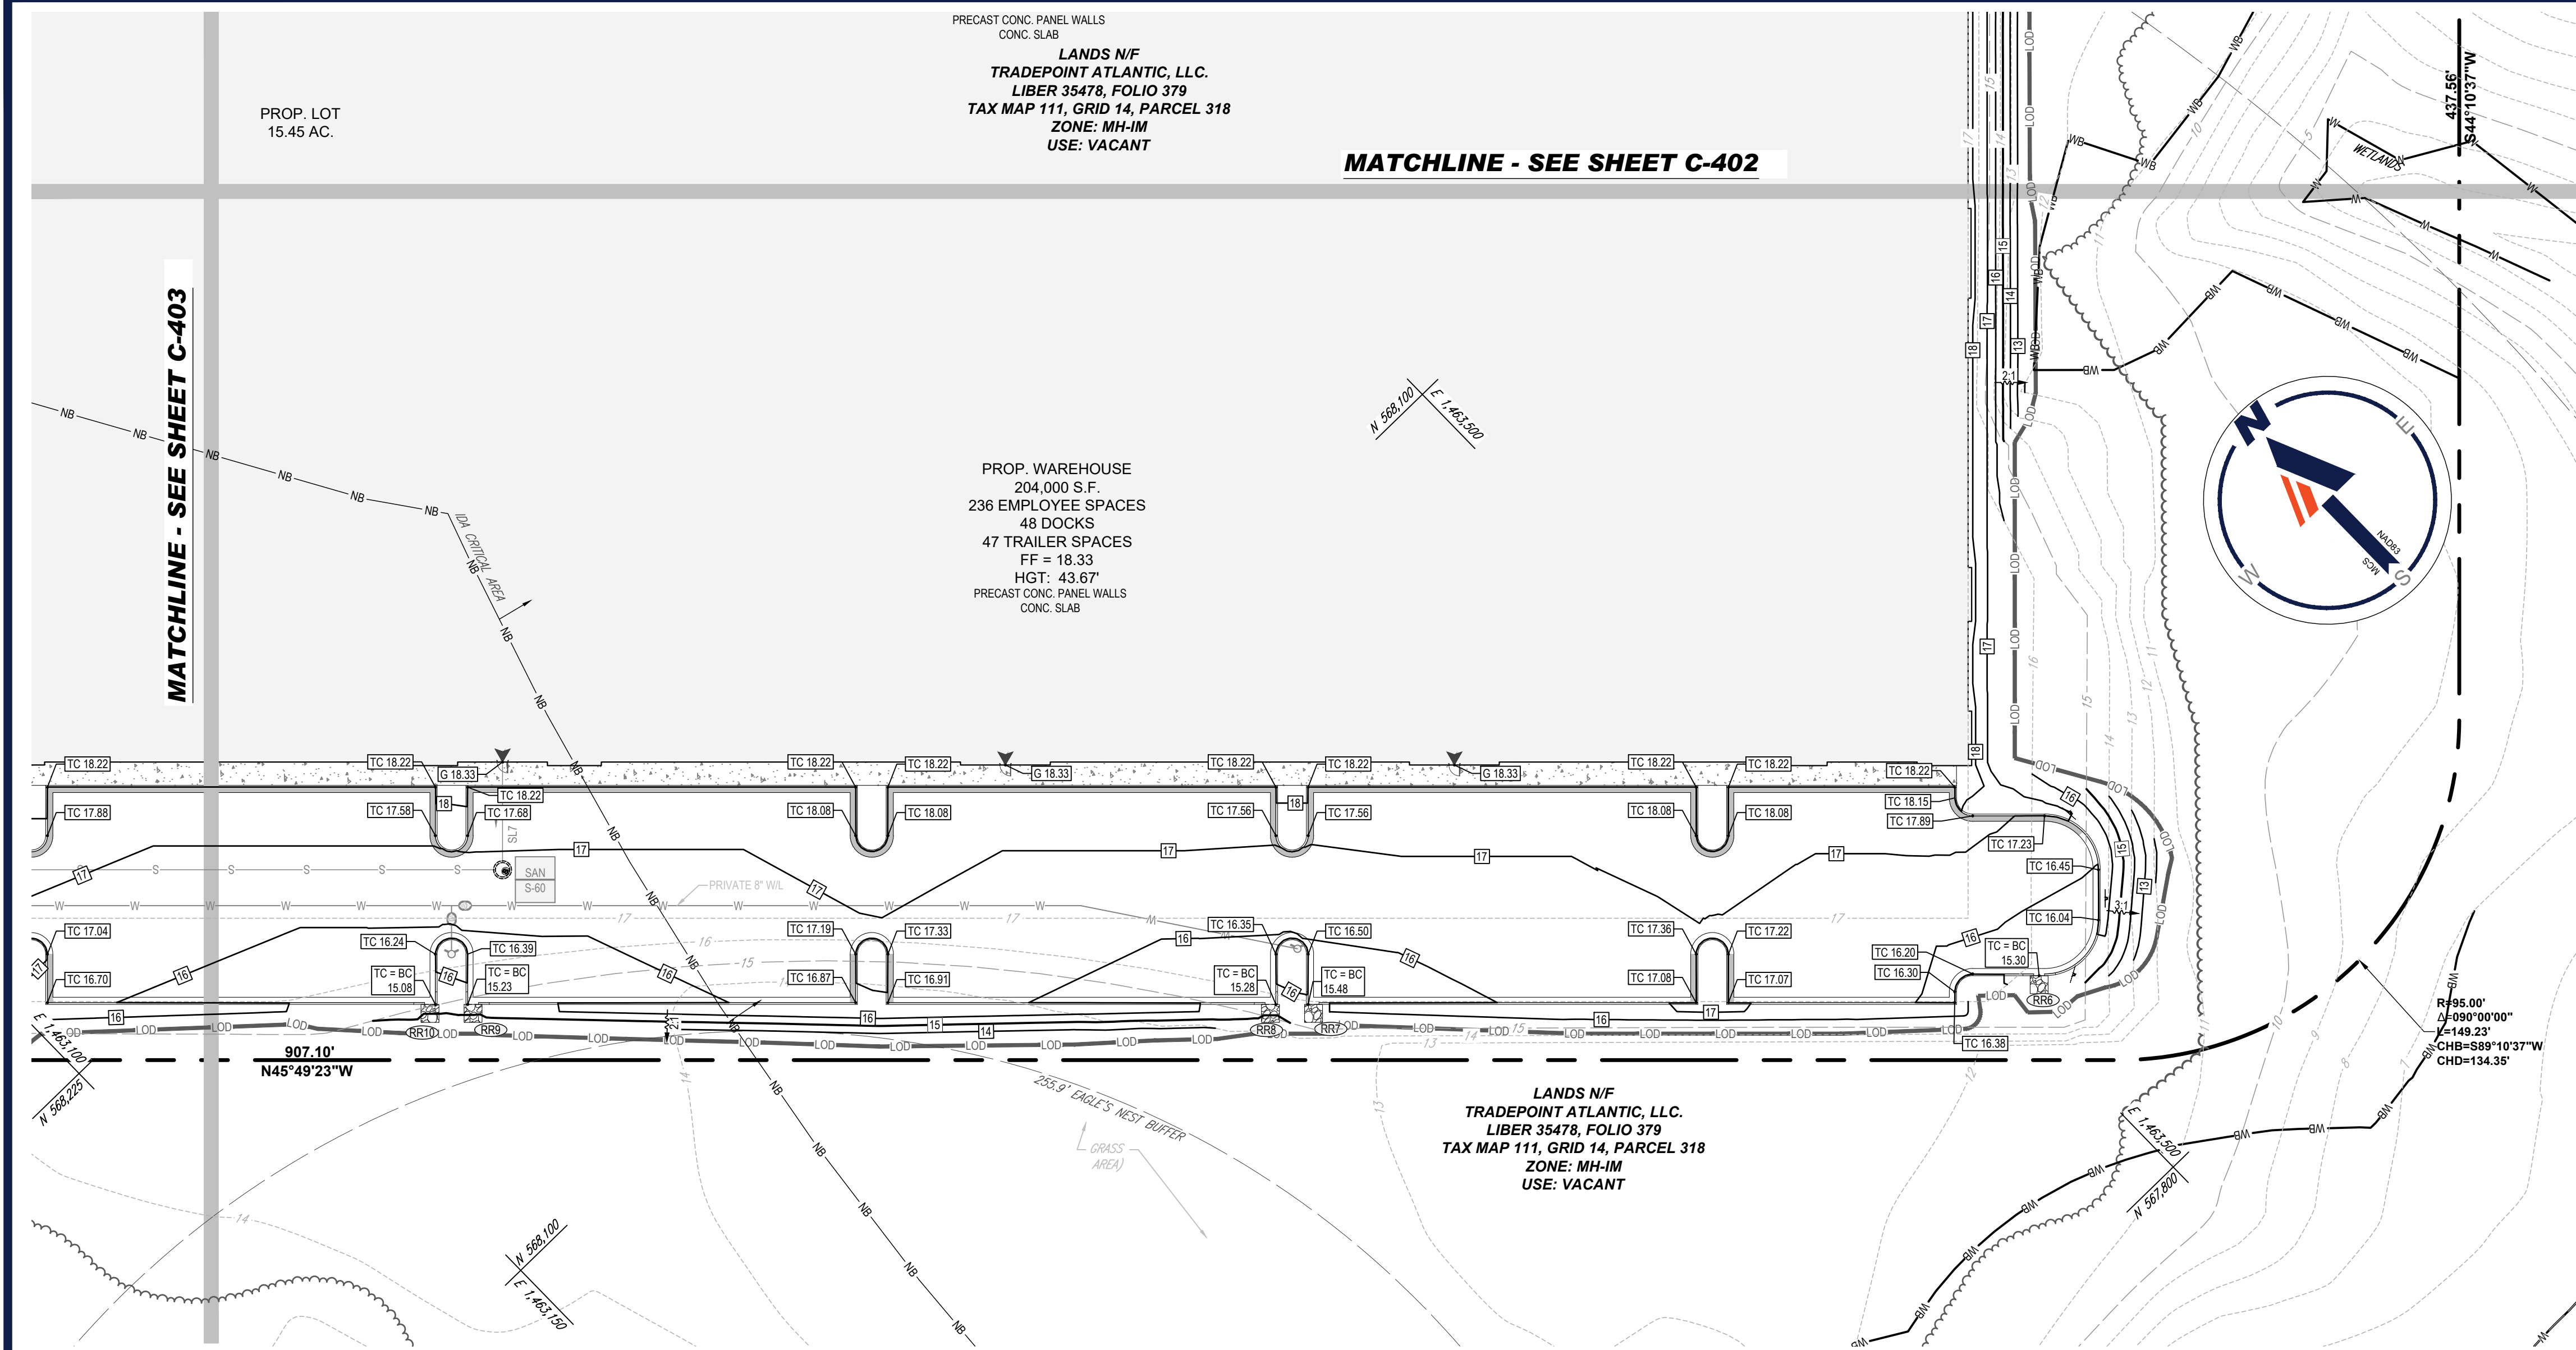

KEY MAP  
NOT TO SCALE

RIP-RAP SCHEDULE							
SYM	DESCRIPTION	MDE DTL	LENGTH	BOTTOM WIDTH	THICKNESS	D <sub>50</sub>	D <sub>MAX</sub>
RR1	CLASS I RIPRAP ON NONWOVEN GEOTEXTILE	D-4-1-C	5'	5'	19"	9.5"	15"
RR2	CLASS I RIPRAP ON NONWOVEN GEOTEXTILE	D-4-1-C	5'	5'	19"	9.5"	15"
RR3	CLASS I RIPRAP ON NONWOVEN GEOTEXTILE	D-4-1-C	5'	5'	19"	9.5"	15"
RR4	CLASS I RIPRAP ON NONWOVEN GEOTEXTILE	D-4-1-C	5'	5'	19"	9.5"	15"
RR5	CLASS I RIPRAP ON NONWOVEN GEOTEXTILE	D-4-1-C	5'	5'	19"	9.5"	15"


LEGEND		
EXISTING NOTE	TYPICAL NOTE TEXT	PROPOSED NOTE
---	ONSITE PROPERTY LINE / R.O.W. LINE	---
---	CONTOUR LINE	---
TC 516.4 OR 516.4	SPOT ELEVATIONS	• TC 516.00 • BC 515.50
---	SANITARY SEWER LINE	---
---	UNDERGROUND WATER LINE	---
---	INDUSTRIAL WATER LINE	---
---	UNDERGROUND ELECTRIC LINE	---
---	UNDERGROUND GAS LINE	---
---	OVERHEAD WIRE	---
---	UNDERGROUND TELEPHONE LINE	---
---	STORM SEWER	---
---	SANITARY SEWER FORCE MAIN	---
---	LIMIT OF DISTURBANCE	---
---	IDA CRITICAL AREA BOUNDARY	---
---	CONCRETE CURB & GUTTER	---
---	SPILL CURB	---
---	NONTIDAL WETLANDS CRITICAL AREA EXPANDED BUFFER	---
---	FOREST BUFFER	---

LEGEND

- STANDARD DUTY ASPHALT PAVEMENT
- HEAVY DUTY ASPHALT PAVEMENT
- HEAVY DUTY CONCRETE PAVEMENT
- BALTIMORE COUNTY CONCRETE ENTRANCE
- CONCRETE SIDEWALK

OWNER / DEVELOPER

TRADEPOINT ATLANTIC, LLC.  
6955 BETHLEHEM BOULEVARD  
BALTIMORE, MD 21219  
CONTACT: ISAAC ROBINSON  
PHONE: 302-377-6094



MARYLAND COORDINATE SYSTEM (MCS)

GRADING 5 OF 6

LIMIT OF DISTURBANCE: 555,400 S.F. OR 12.75 AC.

REVISIONS

REV	DATE	COMMENT	DRAWN BY
1	4/5/23	REV PER CLIENT COMMENTS	RMS MJG



ALWAYS CALL 811  
It's fast. It's free. It's the law.

THIS DRAWING IS INTENDED FOR MUNICIPAL AND/OR AGENCY REVIEW AND APPROVAL. IT IS NOT INTENDED AS A CONSTRUCTION DOCUMENT UNLESS INDICATED OTHERWISE.

PROJECT No.: MDA220034.00  
DRAWN BY: RMS/DMD  
CHECKED BY: JCB  
DATE: 3/31/23  
CAD ID: 1

PHASE II PLANS

FOR

**TRADEPOINT ATLANTIC**

PROJECT SANDLOT

1651 SPARROWS POINT BLVD  
BALTIMORE, MD 21219  
TAX MAP 111, GRID 14, PARCEL 318  
ELECTION DISTRICT 15  
COUNCILMANIC DISTRICT 7  
BALTIMORE COUNTY

**BOHLER**

901 DULANEY VALLEY ROAD, SUITE 801  
TOWSON, MARYLAND 21204  
Phone: (410) 821-7900  
Fax: (410) 821-7987  
JBASS@BOHLERENG.COM

**M.J. GESELL**

PROFESSIONAL ENGINEER  
MARYLAND LICENSE NO. 44057  
PROFESSIONAL CERTIFICATION  
I, MICHAEL J. GESELL, HEREBY CERTIFY THAT THESE DOCUMENTS WERE PREPARED OR APPROVED BY ME, AND THAT I AM A DULY LICENSED PROFESSIONAL ENGINEER UNDER THE LAWS OF THE STATE OF MARYLAND. LICENSE NO. 44057, EXPIRATION DATE: 6/30/23

SHEET TITLE:



**FINAL GRADING PLAN**

SHEET NUMBER:

**C-404**

MDE PROJECT NO. 23-SF-



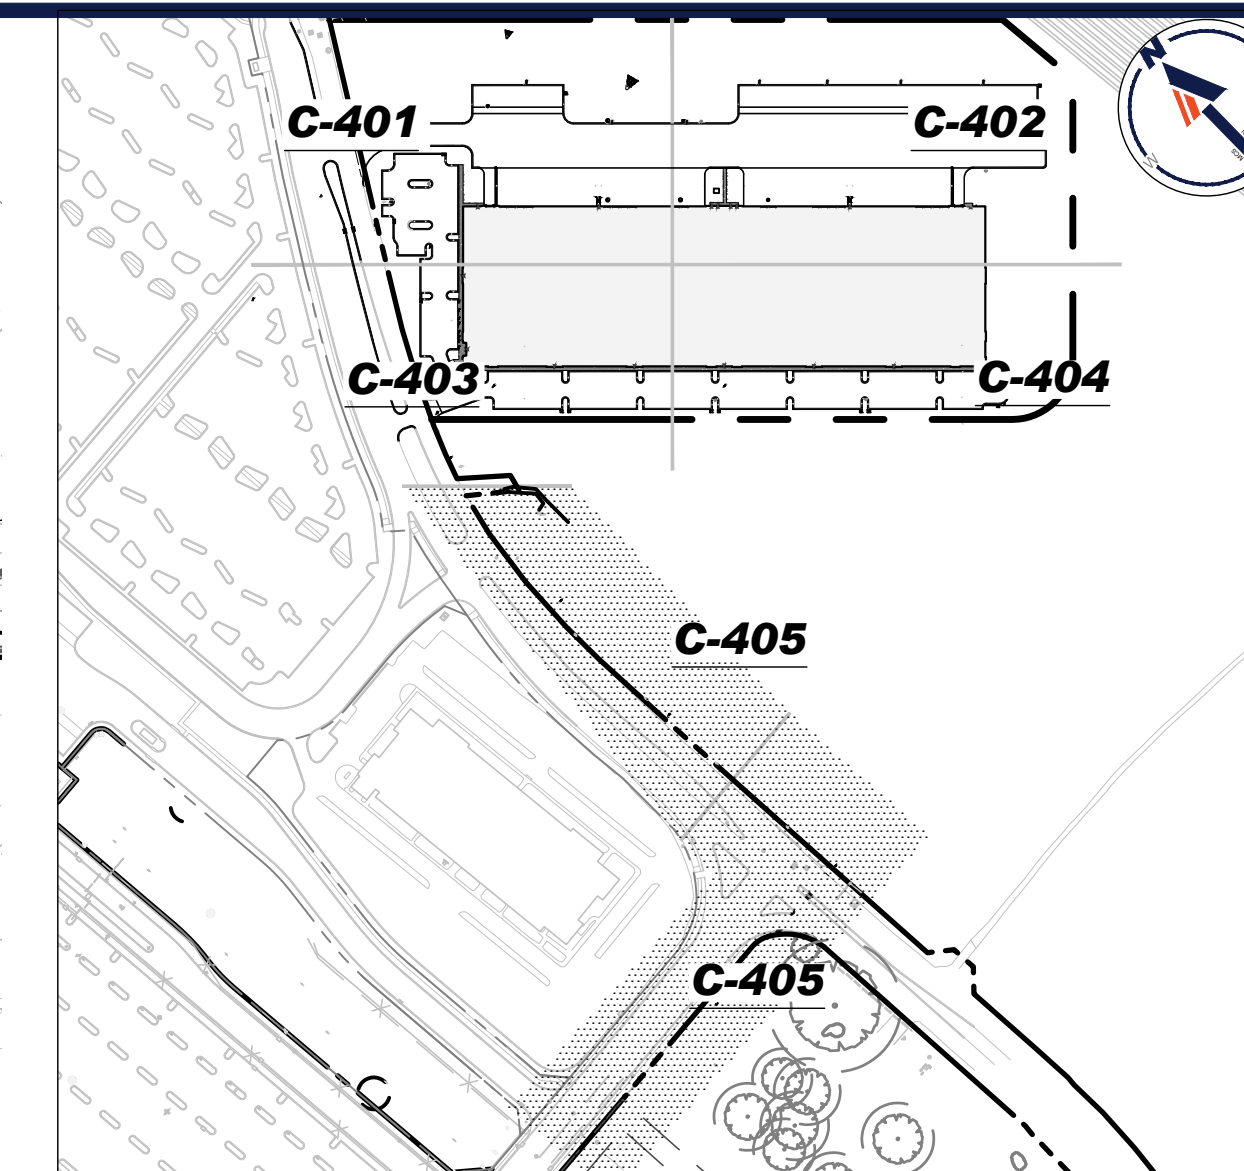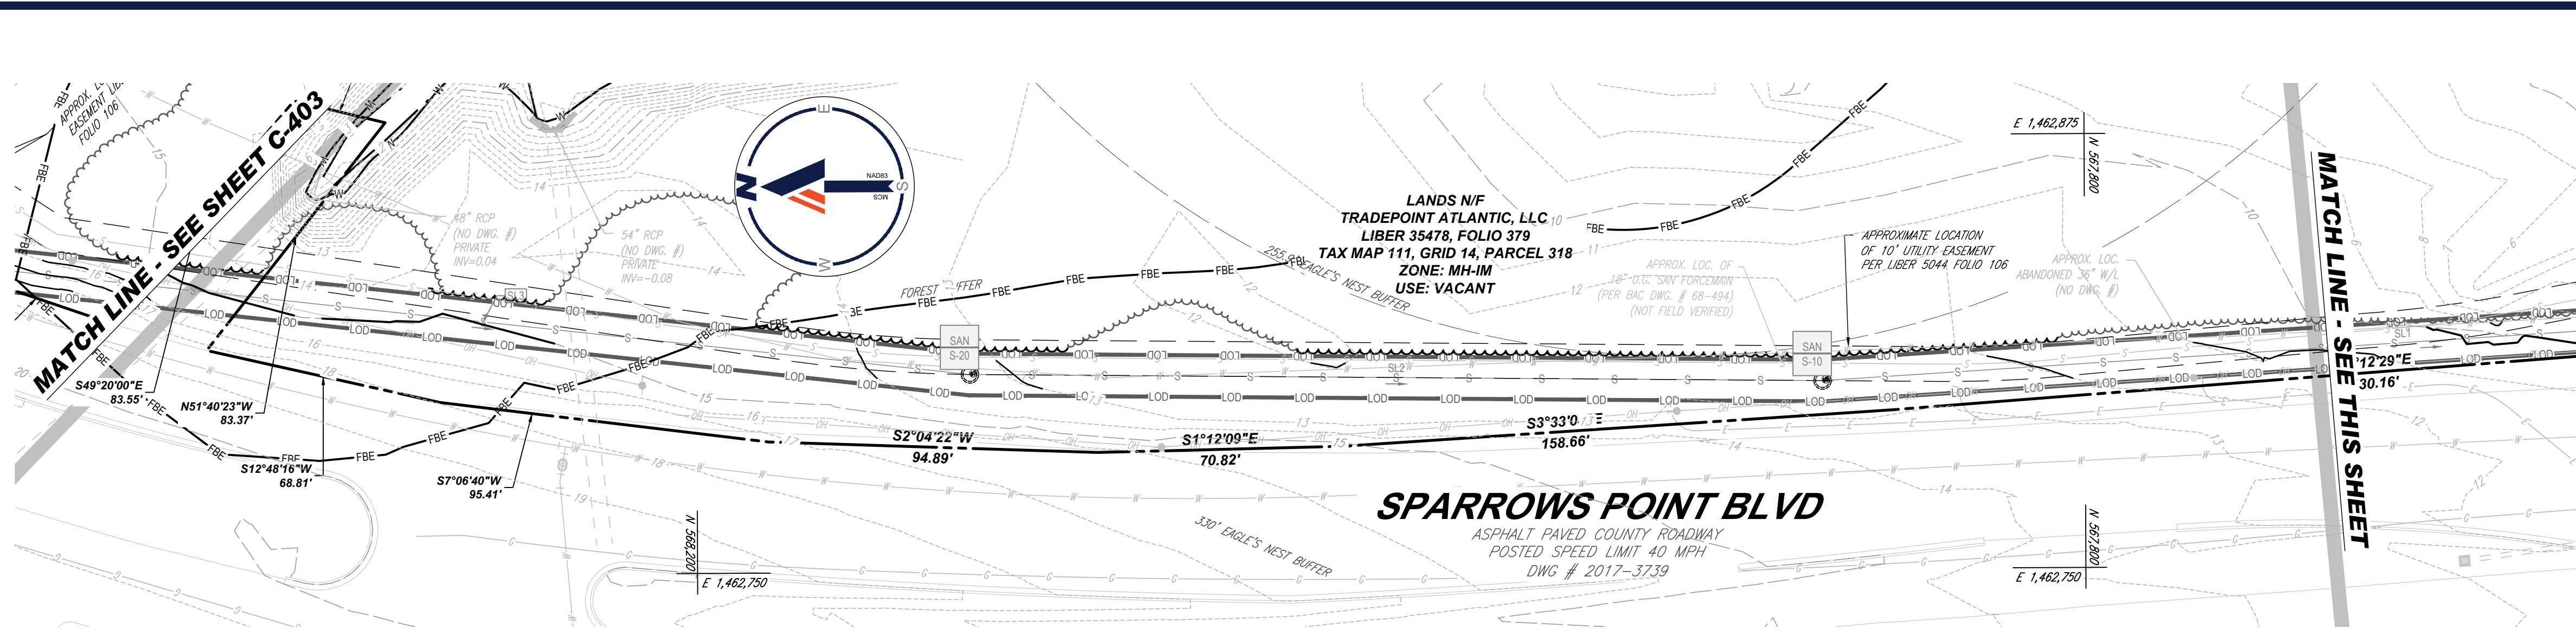

**BOHLER**  
SITE CIVIL AND CONSULTING ENGINEERING  
PROGRAM MANAGEMENT  
LANDSCAPE ARCHITECTURE  
SUSTAINABLE DESIGN  
PERMITTING SERVICES  
TRANSPORTATION SERVICES

**REVISIONS**

REV	DATE	COMMENT	REVISIONS	BY
1	4/5/23	REV PER CLIENT COMMENTS	RMS	MJG

**811**  
Know what's below.  
Call before you dig.  
ALWAYS CALL 811  
It's fast. It's free. It's the law.

THIS DRAWING IS INTENDED FOR MUNICIPAL AND/OR AGENCY REVIEW AND APPROVAL. IT IS NOT INTENDED AS A CONSTRUCTION DOCUMENT UNLESS INDICATED OTHERWISE.


PROJECT No.: MDA220034.00  
DRAWN BY: RMS/DMJ  
CHECKED BY: JCB  
DATE: 3/13/23  
CAD LD: 1

**PHASE II PLANS**  
FOR  
**TRADEPOINT ATLANTIC**  
PROJECT SANDLOT  
1651 SPARROWS POINT BLVD  
BALTIMORE, MD 21219  
TAX MAP 111, GRID 14, PARCEL 318  
ELECTION DISTRICT 15  
COUNCILMANIC DISTRICT 7  
BALTIMORE COUNTY

**BOHLER**  
901 DULANEY VALLEY ROAD, SUITE 801  
TOWSON, MARYLAND 21204  
Phone: (410) 821-7900  
Fax: (410) 821-7987  
JBASS@BOHLERENG.COM

**M.J. GESELL**  
PROFESSIONAL ENGINEER  
MICHIGAN LICENSE NO. 4402  
PROFESSIONAL CERTIFICATION  
I, MICHAEL J. GESELL, HEREBY CERTIFY THAT THESE DOCUMENTS WERE PREPARED OR APPROVED BY ME, AND THAT I AM A DULY LICENSED PROFESSIONAL ENGINEER UNDER THE LAWS OF THE STATE OF MARYLAND. LICENSE NO. 44097, EXPIRATION DATE: 6/30/23

SHEET TITLE:  
**FINAL GRADING PLAN**  
SHEET NUMBER:  
**C-405**  
MDE PROJECT NO. 23-SF-\_\_\_\_\_

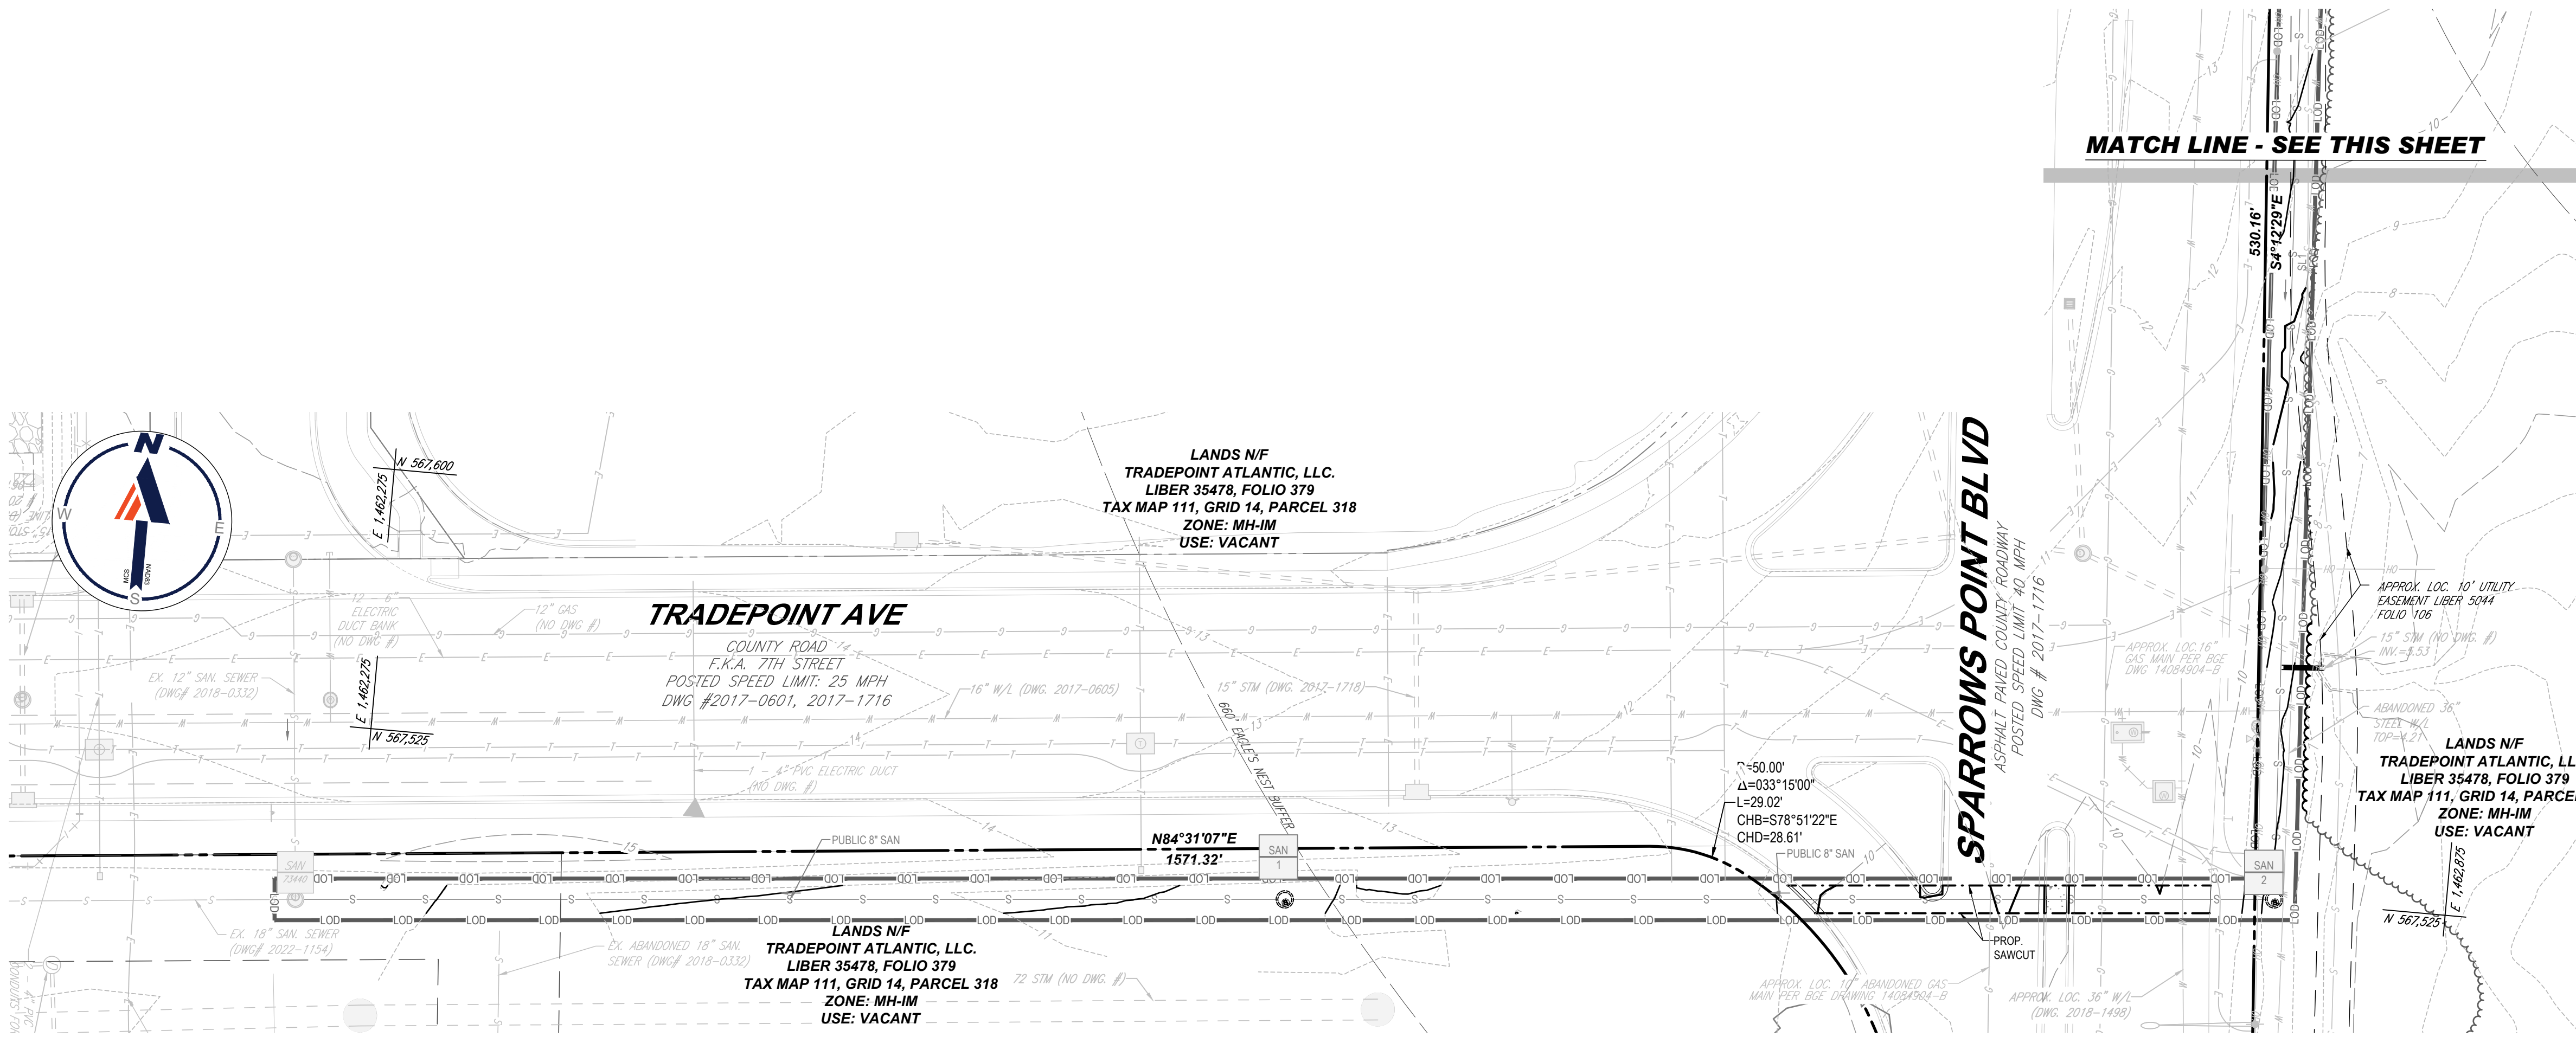


**LEGEND**

EXISTING NOTE	TYPICAL NOTE TEXT	PROPOSED NOTE
---	ONSITE PROPERTY LINE / R.O.W. LINE	---
---	CONTOUR LINE	---
---	SPOT ELEVATIONS	• [TC 516.00] • [BC 515.50]
---	SANITARY SEWER LINE	---
---	UNDERGROUND WATER LINE	---
---	INDUSTRIAL WATER LINE	---
---	UNDERGROUND ELECTRIC LINE	---
---	UNDERGROUND GAS LINE	---
---	OVERHEAD WIRE	---
---	UNDERGROUND TELEPHONE LINE	---
---	STORM SEWER	---
---	SANITARY SEWER FORCE MAIN	---
---	LIMIT OF DISTURBANCE	---
---	IDA CRITICAL AREA BOUNDARY	---
---	CONCRETE CURB & GUTTER	---
---	SPILL CURB	---
---	NONTOTAL WETLANDS CRITICAL AREA EXPANDED BUFFER	---
---	FOREST BUFFER	---

**LEGEND**

[Symbol]	STANDARD DUTY ASPHALT PAVEMENT
[Symbol]	HEAVY DUTY ASPHALT PAVEMENT
[Symbol]	HEAVY DUTY CONCRETE PAVEMENT
[Symbol]	BALTIMORE COUNTY CONCRETE ENTRANCE
[Symbol]	CONCRETE SIDEWALK

**OWNER / DEVELOPER**  
TRADEPOINT ATLANTIC, LLC  
6995 BETHLEHEM BOULEVARD  
BALTIMORE, MD 21219  
CONTACT: ISAAC ROBINSON  
PHONE: 302-377-6094



GRADING 6 OF 6 LIMIT OF DISTURBANCE: 555,400 S.F. OR 12.75 AC.

MARYLAND COORDINATE SYSTEM (MCS)

APR 05, 2023  
C:\PROGRAMS\BOL\BOL\2023\03\02\2023TEMP\PCP\BOL\_1244\MDA220034.00\GRAD-11-1-AVOUT\_C-405\_GRAU



---



---

## **APPENDIX F**


---

---



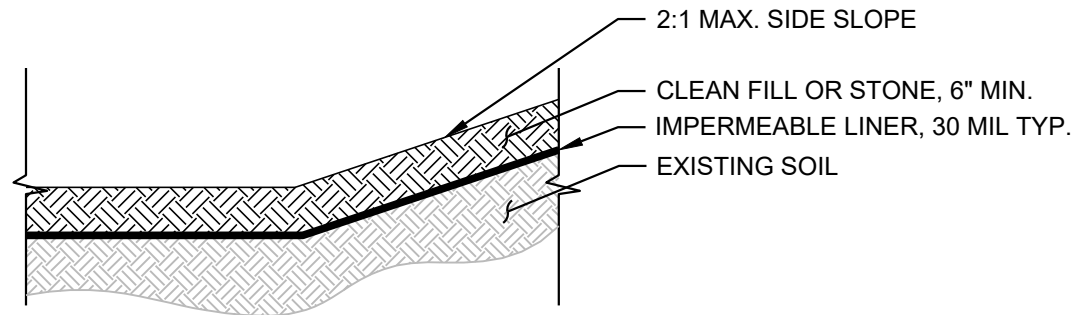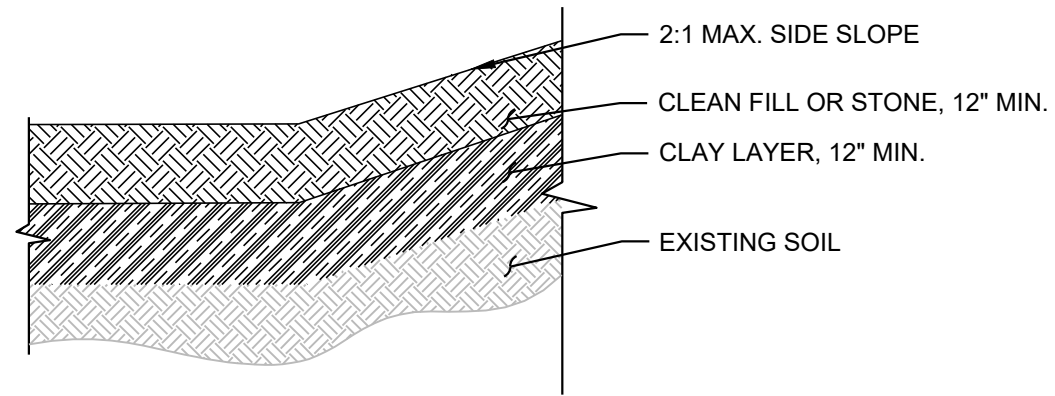


**TYPICAL POND SECTIONS**  
NOT TO SCALE

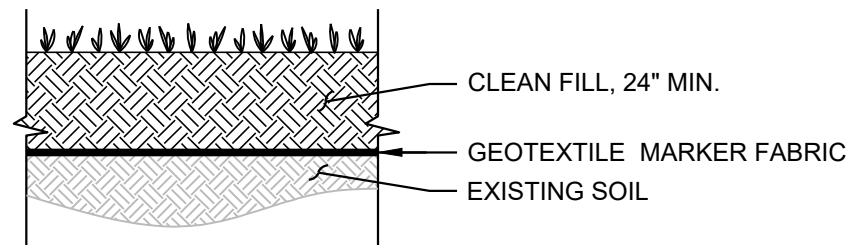


**TYPICAL LANDSCAPE SECTION**  
NOT TO SCALE

**GEOTEXTILE MARKER FABRIC SPECIFICATIONS**

THE GEOTEXTILE MARKER FABRIC SHALL BE A NONWOVEN PERVIOUS SHEET OF POLYPROPYLENE MATERIAL. ADD STABILIZERS AND/OR INHIBITORS TO THE BASE MATERIAL, AS NEEDED, TO MAKE THE FILAMENTS RESISTANT TO DETERIORATION BY ULTRAVIOLET LIGHT, OXIDATION AND HEAT EXPOSURE. REGRIND MATERIAL, WHICH CONSISTS OF EDGE TRIMMINGS AND OTHER SCRAPS THAT HAVE NEVER REACHED THE CONSUMER, MAY BE USED TO PRODUCE THE GEOTEXTILE. POST-CONSUMER RECYCLED MATERIAL MAY BE USED. GEOTEXTILE SHALL BE FORMED INTO A NETWORK SUCH THAT THE FILAMENTS OR YARNS RETAIN DIMENSIONAL STABILITY RELATIVE TO EACH OTHER, INCLUDING THE EDGES. GEOTEXTILES SHALL MEET THE REQUIREMENTS SPECIFIED IN TABLE 1. WHERE APPLICABLE, TABLE 1 PROPERTY VALUES REPRESENT THE MINIMUM AVERAGE ROLL VALUES IN THE WEAKEST PRINCIPAL DIRECTION. VALUES FOR APPARENT OPENING SIZE (AOS) REPRESENT MAXIMUM AVERAGE ROLL VALUES

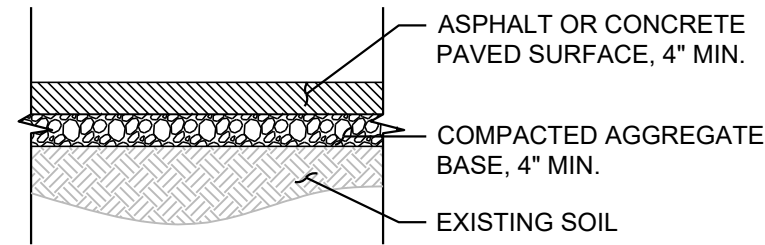

**TYPICAL PAVING SECTION**  
NOT TO SCALE

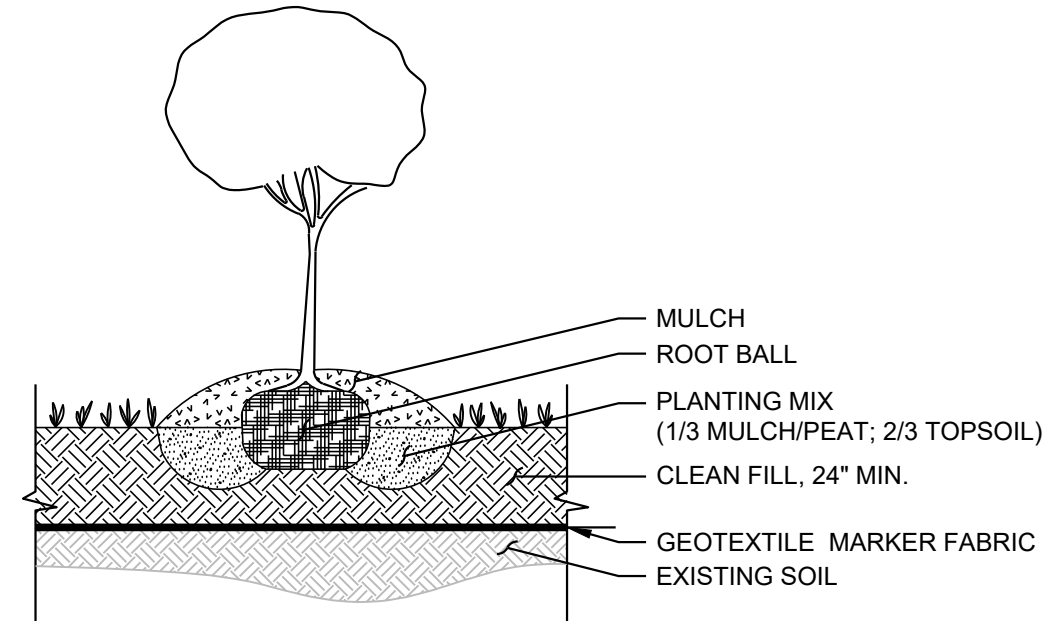

**TYPICAL PLANTING SECTION**  
NOT TO SCALE

**TCDNG'3"**

Mechanical Properties	Test Method	Unit	Minimum Average Roll Value	
			MD	CD
Grab Tensile Strength	ASTM D4632	lbs (N)	120 (534)	120 (534)
Grab Tensile Elongation	ASTM D4632	%	50	50
Trapezoid Tear Strength	ASTM D4533	lbs (N)	50 (223)	50 (223)
CBR Puncture Strength	ASTM D6241	lbs (N)	310 (1380)	
			Maximum Opening Size	
Apparent Opening Size (AOS)	ASTM D4751	U.S. Sieve (mm)	70 (0.212)	
			Minimum Roll Value	
Permittivity	ASTM D4491	sec <sup>-1</sup>	1.7	
Flow Rate	ASTM D4491	gal/min/ft <sup>2</sup> (l/min/m <sup>2</sup> )	135 (5500)	
			Minimum Test Value	
UV Resistance (at 500 hours)	ASTM D4355	% strength retained	70	

P:\EnviroAnalytics Group\60443M EAG\_TPA Redevelopment\Drawg\B6\Production\Figure 6b - Environmental Capping Detail.dwg Plotted: April 9, 2019

scale	N/A
date	9/8/2020
project no.	160443M

designed	RJC
checked	TNP
drawn	RJC

**O R I O W O "CAPPING SECTION DETAILS**  
SPARROWS POINT  
BALT. COUNTY, MARYLAND

---

---





## **APPENDIX G**

---

---

**GENERAL NOTES:**

1. ALL PIPES OR CONDUIT SHALL BE LEAK-PROOF AND WATERTIGHT. ALL JOINTS SHALL BE SEALED OR GASKETED.
2. ALL PIPES SHALL BE PROPERLY PLACED AND BEDDED TO PREVENT MISALIGNMENT OR LEAKAGE. PIPE BEDDING SHALL BE INSTALLED IN SUCH A MANNER AS TO MINIMIZE THE POTENTIAL FOR ACCUMULATION OF WATER AND CONCENTRATED INFILTRATION.
3. MINIMUM COVER ABOVE UTILITY SHALL BE BASED ON SPECIFIC UTILITY REQUIREMENTS.
4. TRENCHES SHALL BE BACKFILLED WITH BEDDING AND MATERIALS APPROVED BY MDE.
5. FOR ANY UTILITY SEGMENT WHICH GOES THROUGH AN AREA WHICH IS DESIGNATED TO RECEIVE A LANDSCAPED CAP, THE UPPER 2 FEET OF BACKFILL MUST MEET THE REQUIREMENTS OF MDE VCP CLEAN FILL FOR INDUSTRIAL LAND USE. IN THIS CASE THE MDE VCP CLEAN FILL WILL BE UNDERLAIN BY A GEOTEXTILE MARKER FABRIC. UTILITY SEGMENTS WHICH GO THROUGH AREAS WHICH DO NOT REQUIRE CAPPING OR ARE DESIGNATED TO RECEIVED A PAVED CAP WILL BE BACKFILLED WITH MATERIALS APPROVED BY MDE FOR THIS USE.

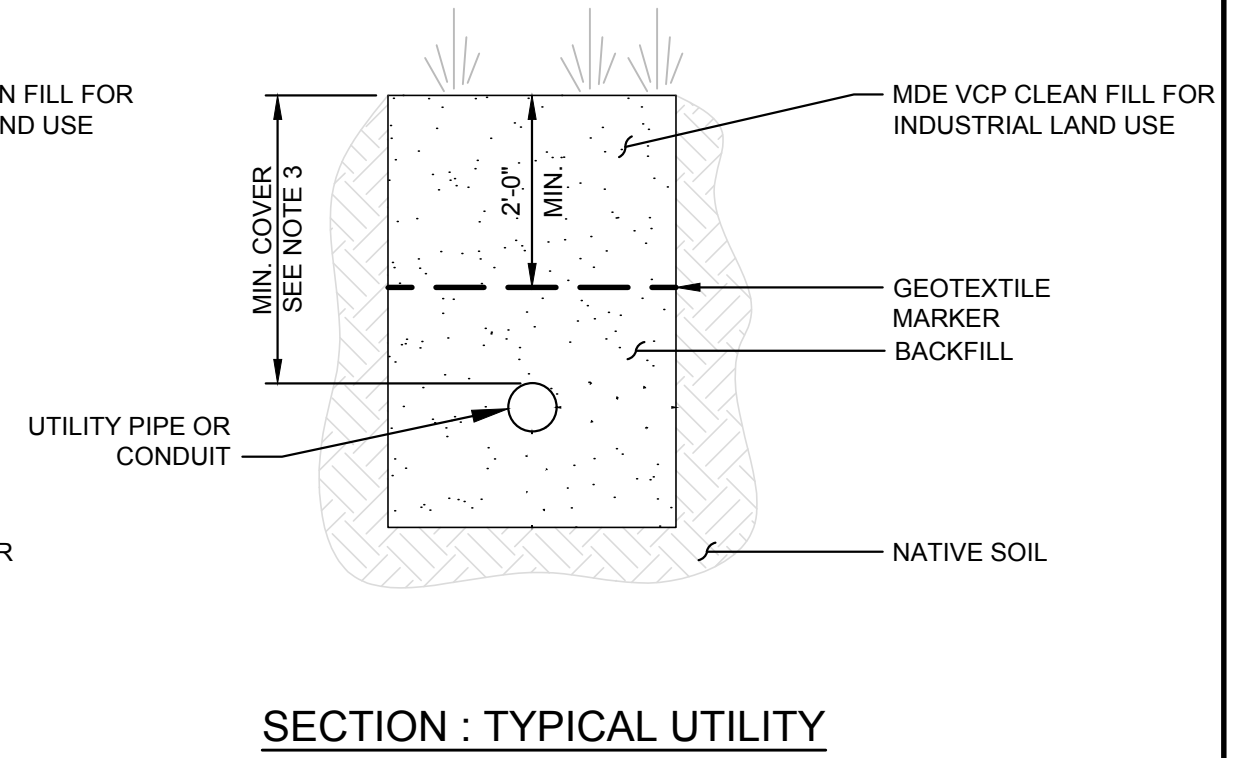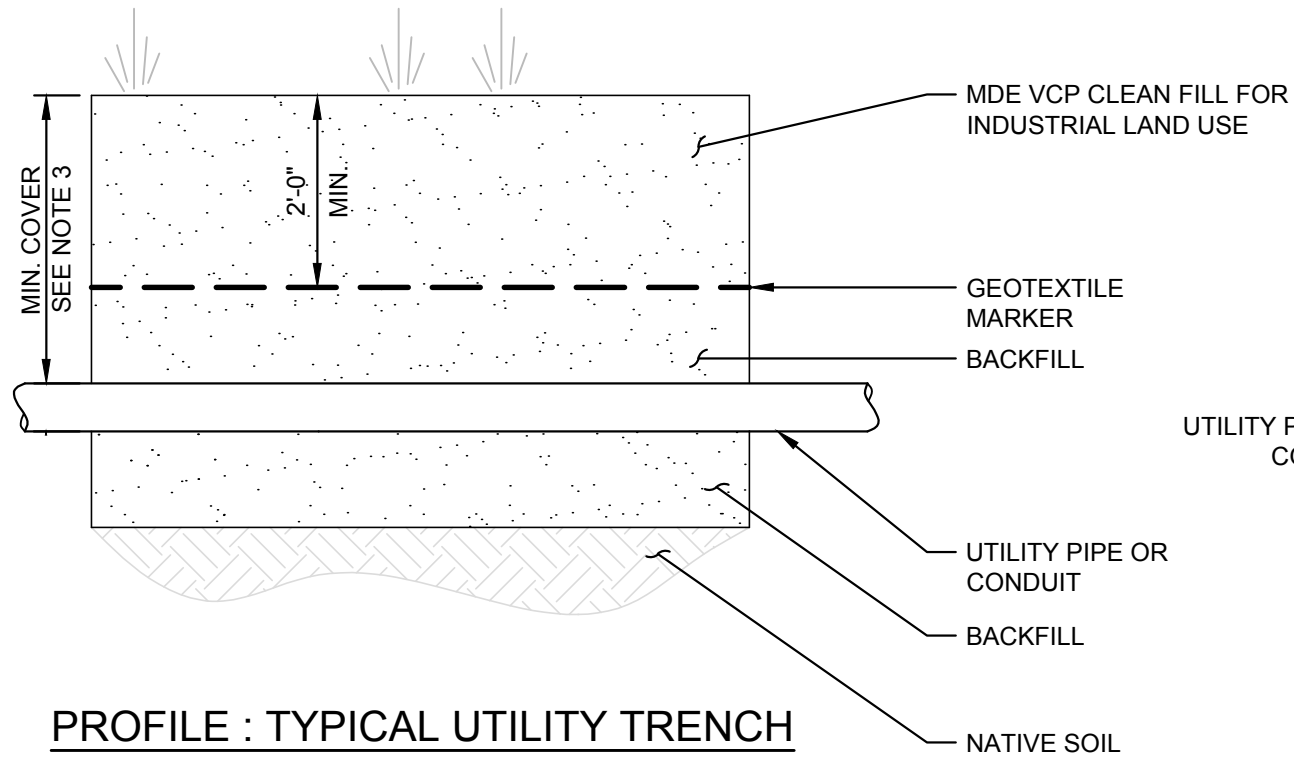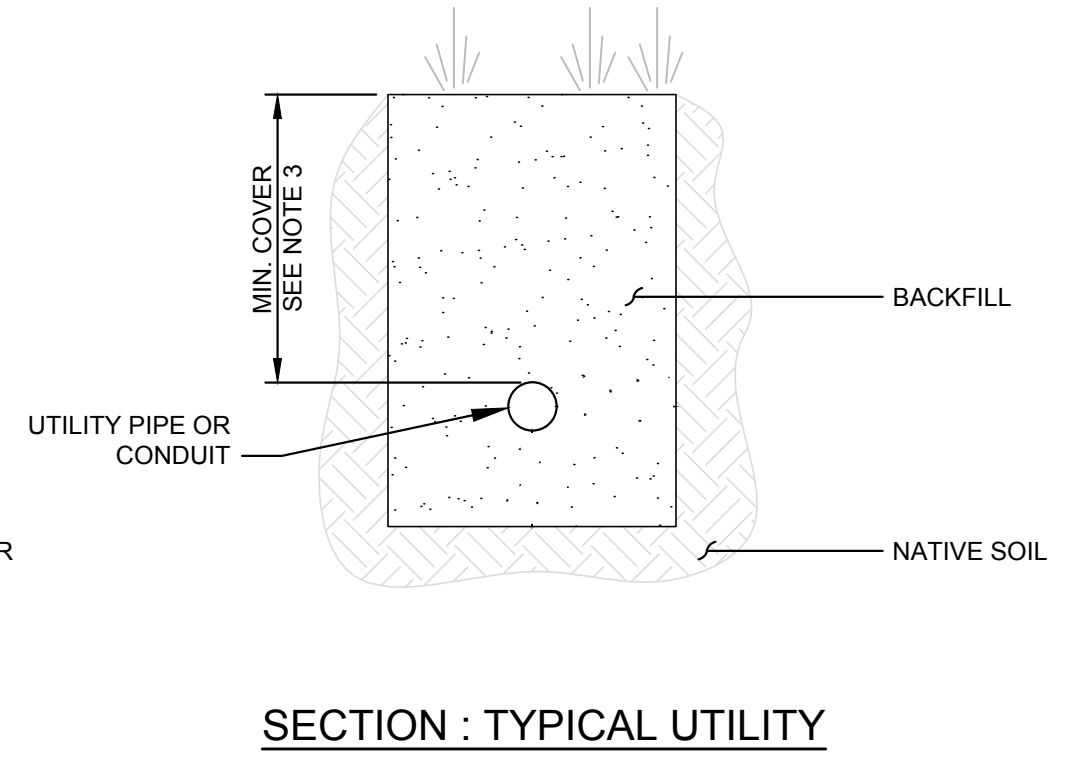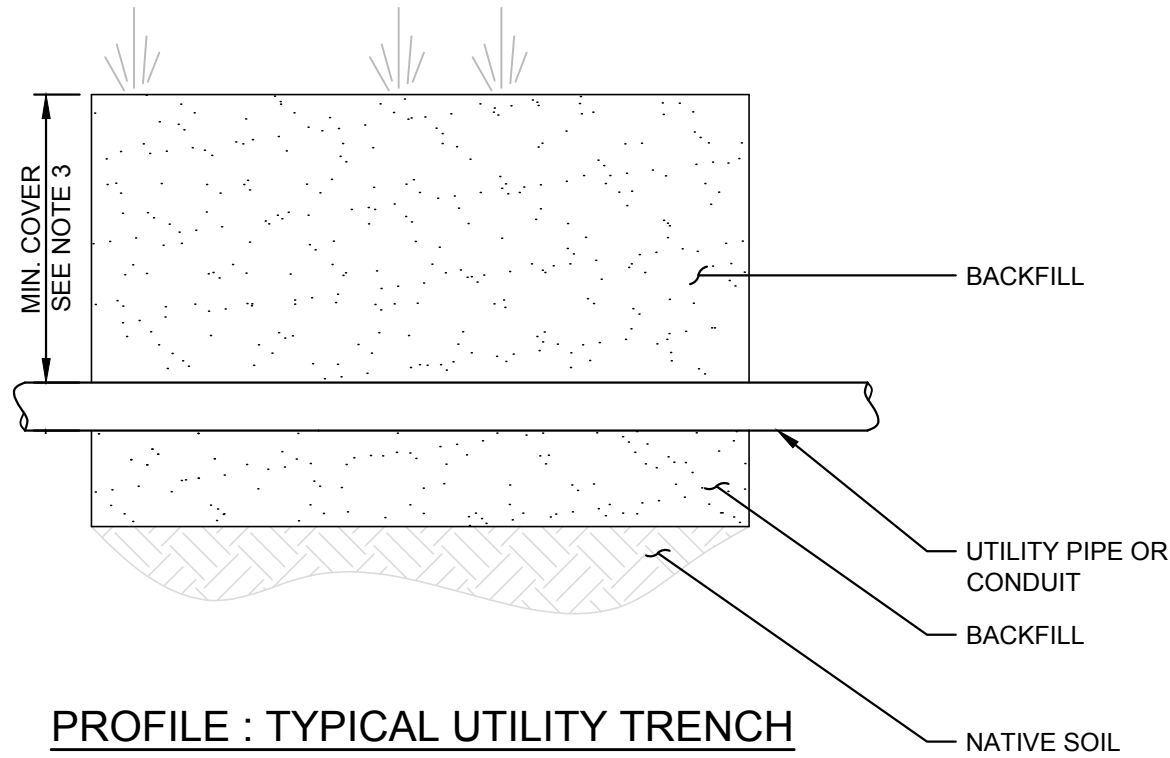



---

---

**CRRGF KZ'H "**

---

---

## **Utility Excavation NAPL Contingency Plan**

Revision 5 – September 20, 2022

### **Objectives:**

The purpose of this plan is to describe procedures to be followed in the event that non-aqueous phase liquid (NAPL) is encountered in utility trenches or other excavations during development of the Tradepoint Atlantic property. The specific objectives of this plan and the procedures outlined herein are:

1. To ensure identification and proper management of NAPL contaminated soils.
2. To ensure proper worker protection for working in areas of NAPL contamination.
3. To ensure that the installation of new utilities does not create new preferential flow paths for the migration of NAPL or soil vapors.

### **Identification of Oil & Grease and Petroleum Contaminated Soil:**

An Environmental Professional (EP) will be on-site to determine if soils show evidence of the presence of NAPL during installation of utility trenches or other excavation activities completed during development. NAPL-contaminated soils can be identified by the presence of free oil. Free oil (NAPL) is liquid oil which could potentially be drained or otherwise extracted from the soil, and is the focus of this contingency plan, although severe staining accompanied by odors may be addressed via similar contingency measures provided herein (based on the judgement of the EP).

If NAPL is encountered during construction, potentially impacted material from the excavation will be removed and separated on plastic / covered with the same. Additional discussion of removal of material is in the **Soil Excavation, Staging, Sampling and Disposal** section below. If NAPL is encountered in an area where there is no known historical NAPL impact, the MDE will be notified (see **Initial Reporting** section) and the open excavation may be allowed to sit overnight. If after removal of the initial material identified additional NAPL impacted material enters the open excavation, the extent of impacts may be delineated and additional material removed / segregated. .

### **Soil Excavation, Staging, Sampling and Disposal:**

The EP will monitor all utility trenching and excavation activities for signs of potential contamination. In particular, soils will be monitored with a hand-held photoionization detector (PID) for potential volatile organic compounds (VOCs) and will also be visually inspected for the presence of staining, petroleum waste materials, or other indications of NAPL contamination that may be different than what was already characterized.

Soil exhibiting physical evidence of NAPL contamination, which is located within a proposed new utility or subsurface structure (i.e., foundation, sump, electrical vault, underground tank, etc.), will

be excavated and segregated for disposal at the on-site nonhazardous landfill (Greys Landfill) or an off-site facility pending the completion of required analytical testing. If NAPL material continues to enter the open excavation, additional excavation may be continued in the field based on visual screening supplemented by the PID.

Any recovered NAPL impacted material will be segregated and collected for disposal. As required for disposal, samples impacted by NAPL will be collected for profiling/waste characterization and submitted to a fixed laboratory. Upon receipt of any additional characterization analytical results, the stockpiles will be tracked from generation to disposal.

### **Initial Reporting:**

If evidence of NAPL in soil or groundwater is encountered during excavation in an area with no known historic NAPL impact, it will be reported to the MDE. Information regarding the location and characteristics of NAPL contaminated material will be documented as follows:

- Location (Site / Parcel ID with map);
- Approximate extent of contamination (horizontally and vertically – prepare a sketch including dimensions);
- Relative degree of contamination (i.e. free oil with strong odor vs. staining); and
- Visual documentation (take photographs and complete a photograph log)

### **Utility Installations in Impacted Areas:**


Underground piping or conduits installed through areas of known NAPL contamination shall be leak proof and water tight. All joints will be adequately sealed or gasketed, and pipes or conduits will be properly bedded and placed to prevent leakage. Trench backfill will meet the MDE definition of clean fill, or be otherwise approved by the MDE. Bedding must be properly placed and compacted below the haunches of the pipe. Clay, flowable fill, or concrete plugs may be placed every 100 feet across any permeable bedding to minimize the preferential flow and concentration of water along the bedding of such utilities.

If required, each trench plug will be constructed with a 2-foot-thick clay plug or 1-foot-thick flowable fill or concrete plug, perpendicular to the pipe, which extends at least 1 foot in all directions beyond the permeable pipe bedding. The plug acts as an anti-seep collar, and will extend above the top of the pipe. A specification drawing for installation of the trench plug has been provided as **Figure 1**.




**GENERAL NOTES:**

1. ALL PIPES OR CONDUIT PASSING THROUGH AREAS OF PETROLEUM CONTAMINATION SHALL BE LEAK-PROOF AND WATERTIGHT. ALL JOINTS SHALL BE SEALED OR GASKETED.
2. ALL PIPES SHALL BE PROPERLY PLACED AND BEDDED TO PREVENT MISALIGNMENT OR LEAKAGE. PIPE BEDDING SHALL BE INSTALLED IN SUCH A MANNER AS TO MINIMIZE THE POTENTIAL FOR ACCUMULATION OF WATER AND CONCENTRATED INFILTRATION.
3. ANTI-SEEP COLLARS FROM THE PIPE MANUFACTURER, THAT ARE PRODUCED SPECIFICALLY FOR THE PURPOSE OF PREVENTING SEEPAGE AROUND THE PIPE, ARE ACCEPTABLE IF INSTALLED IN STRICT ACCORDANCE WITH THE MANUFACTURER'S RECOMMENDATIONS, AND ONLY WITH PRIOR APPROVAL BY TPA.
4. MINIMUM COVER ABOVE UTILITY SHALL BE BASED ON SPECIFIC UTILITY REQUIREMENTS.
5. TRENCHES SHALL BE BACKFILLED WITH BEDDING AND MATERIALS APPROVED BY MDE.
6. FOR ADDITIONAL REQUIREMENTS, INCLUDING THE USE OF MDE VCP CLEAN FILL FOR INDUSTRIAL LAND USE AND INSTALLATION OF GEOTEXTILE MARKER FABRIC, REFER TO NOTE 5 ON THE TYPICAL UTILITY CROSS SECTIONS.
7. ALL UTILITIES INSTALLED THROUGH AREAS CONTAINING NAPL OR ELEVATED CHEMICAL IMPACTS WITH THE POTENTIAL TO TRANSMIT VAPORS ALONG PREFERENTIAL FLOW PATHWAYS SHALL BE EITHER 1) BACKFILLED WITH LOW PERMEABILITY BACKFILL MATERIAL (LESS THAN OR EQUAL TO THE PERMEABILITY OF THE EXISTING SUBGRADE), OR 2) INSTALLED WITH TRENCH PLUGS ALONG THE ALIGNMENT IN ACCORDANCE WITH THE DETAILS SHOWN ON THIS PLAN AND THE FOLLOWING NOTES:
  - A.) UTILITY TRENCH PLUGS SHALL BE INSTALLED AT 100-FOOT (MAX.) INTERVALS THROUGH ALL AREAS OF NAPL CONTAMINATION.
  - B.) UTILITY TRENCH PLUGS SHALL EXTEND A MINIMUM OF 1-FOOT IN ALL DIRECTIONS BEYOND ANY HIGHER PERMEABILITY BACKFILL MATERIALS (I.E., MATERIALS EXCEEDING THE PERMEABILITY OF THE EXISTING SUBGRADE).

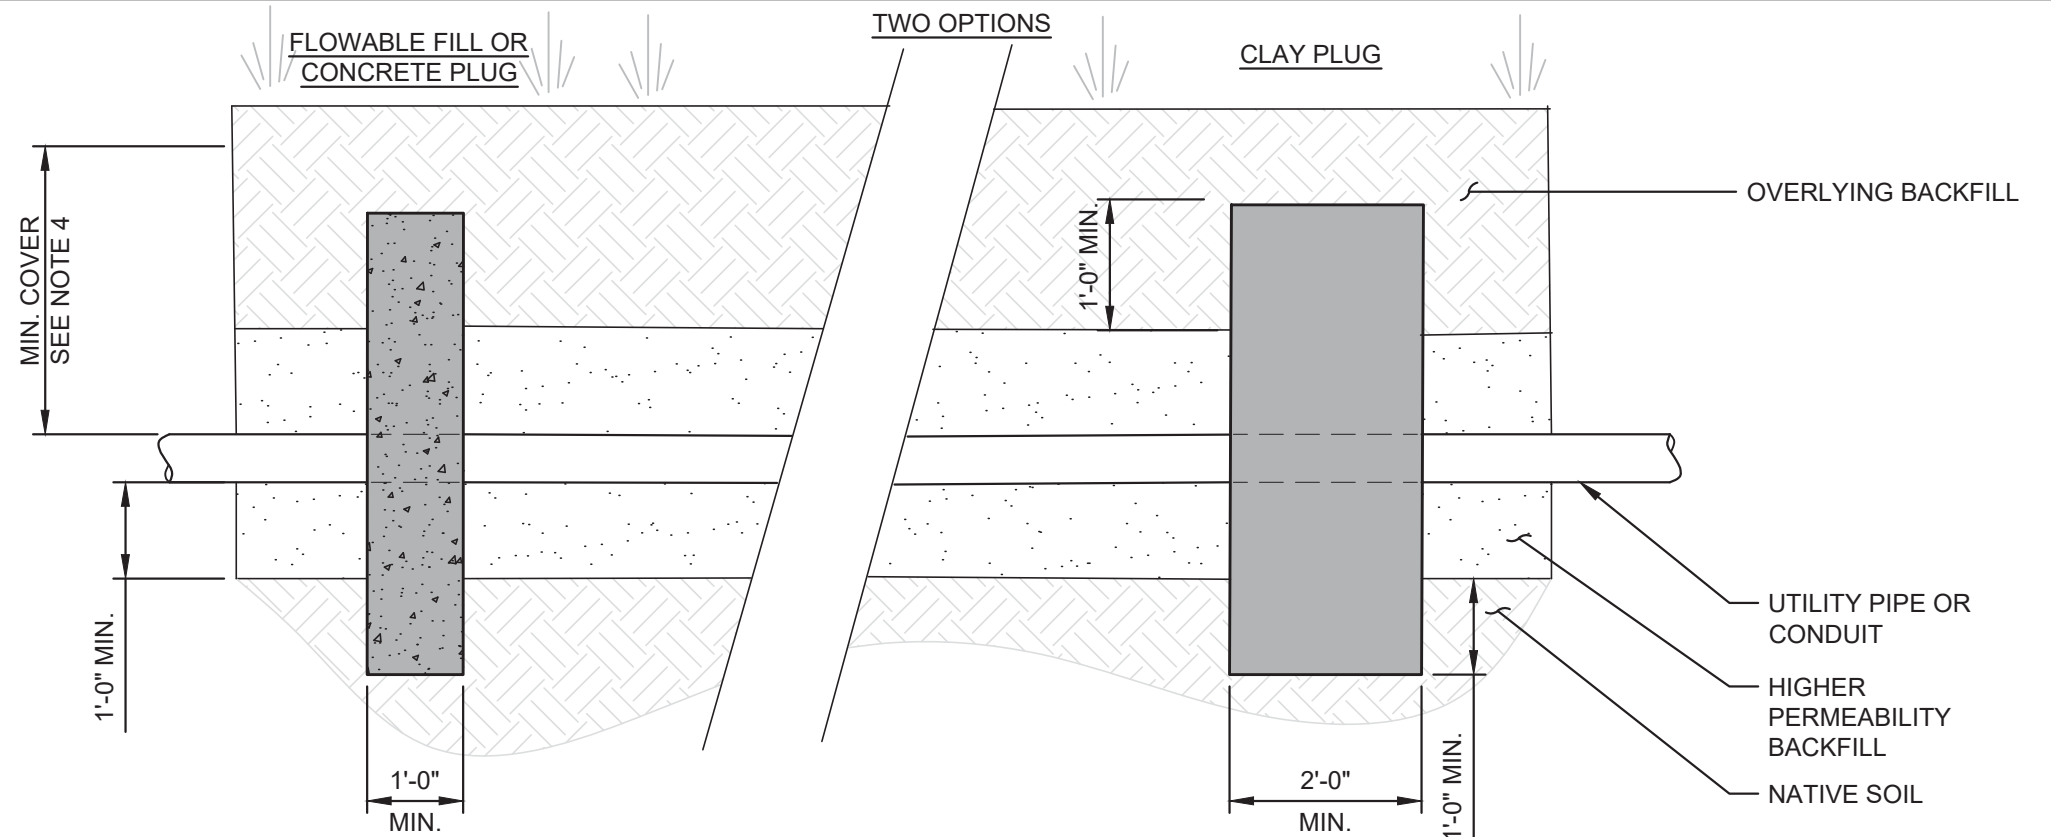

**SECTION : TYPICAL UTILITY TRENCH PLUG**

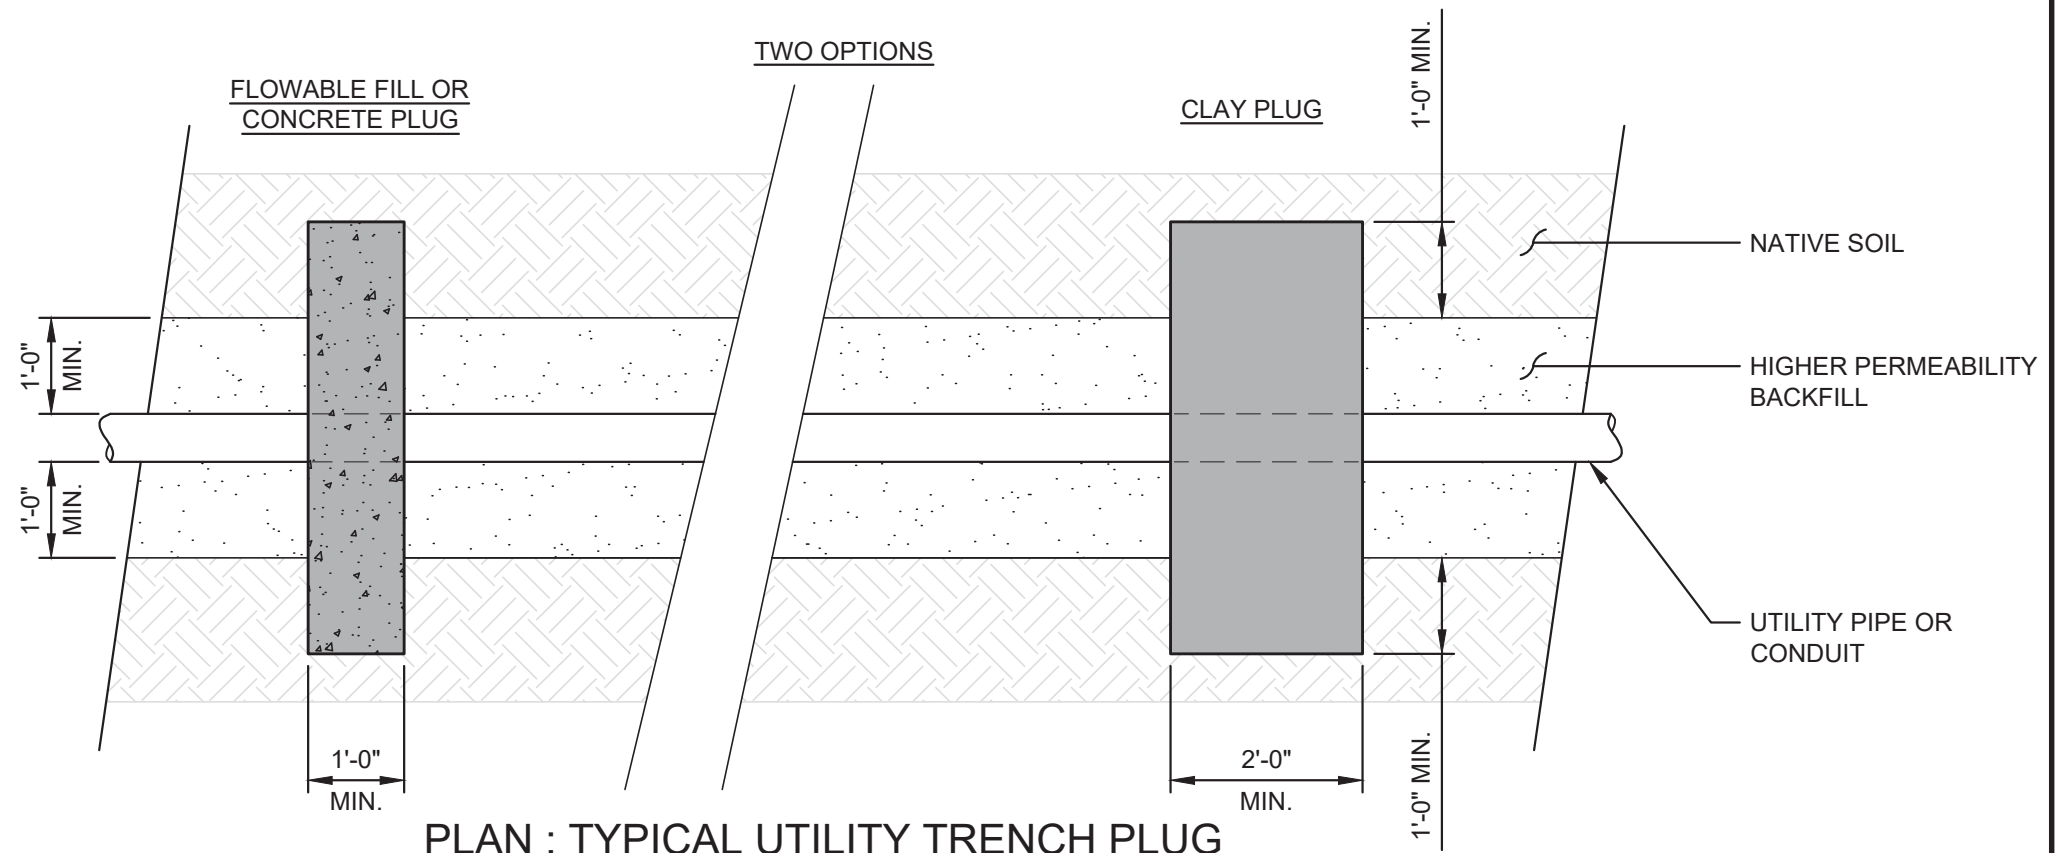

**PLAN : TYPICAL UTILITY TRENCH PLUG**

This drawing, its contents, and each component of this drawing are the property of and proprietary to ARM Group LLC, and shall not be reproduced or used in any manner except for the purpose identified on the Title Block, and only by or on behalf of this client for the identified project unless otherwise authorized by the express, written consent of ARM Group LLC.



**UTILITY TRENCH PLUG**  
Sparrows Point Site  
Tradepoint Atlantic

September 2020  
Not to Scale  
160443M

Figure  
**1**